





**Drainage Services Department
Port Shelter Sewerage, Stage 3 – Sewerage
Works at Po Toi O
Quarterly EM&A Report
(Period from June to August 2022)**

Prepared by

SGS Hong Kong Limited

Issue and Revision Record

Revision	Description	Prepared by	Checked by	Approved by	Date
01	Submission	Various	Roy Hung 	Grace Fung 	Sep 2022

Disclaimer

This document is issued by the Company under its General Conditions of Service accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	3
		Ref#	EMA2204/03/01
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

TABLE OF CONTENT

1. EXECUTIVE SUMMARY	4
2. INTRODUCTION	5
3. SUMMARY OF EM&A MONITORING REQUIREMENTS	6
4. SUMMARY OF EM&A MONITORING RESULTS	8
5. WASTE MANAGEMENT.....	12
6. ENVIRONMENTAL NON-CONFORMANCE	13
7. COMMENTS, RECOMMENDATIONS AND CONCLUSION	14
APPENDIX A - LOCATION OF THE MONITORING AND CONTROL STATIONS.....	A1
APPENDIX B - LAYOUT PLAN OF PROJECT AREA	B1
APPENDIX C - PROJECT ORGANIZATION CHART & CONTACT INFORMATION OF KEY PERSONNEL.....	C1
APPENDIX D – CONSTRUCTION WORK PROGRAMME.....	D1
APPENDIX E - IMPLEMENTATION OF RECOMMENDED MITIGATION MEASURES	E1
APPENDIX F - METEOROLOGICAL DATA EXTRACTED FROM HONG KONG OBSERVATORY	F1
APPENDIX G - GRAPHICAL PLOTS OF THE MONITORING RESULT	G1
APPENDIX H - SUMMARY OF WASTE FLOW TABLE	H1
APPENDIX I - CUMULATIVE STATISTICS ON COMPLAINTS, NOTIFICATIONS OF SUMMONS	I1

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	4
		Ref#	EMA2204/03/01
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

1. EXECUTIVE SUMMARY

- 1.1 This Quarterly Environmental Monitoring & Audit (EM&A) report presents the EM&A works performed in the period between June to August 2022 for “Port Shelter Sewerage, Stage 3 – Sewerage works at Po Toi O”.
- 1.2 The impact stage EM&A Programme for the Project includes air quality, noise, water quality, waste, ecology, fisheries, landscape and visual and built heritage monitoring. The recommended environmental mitigation measures were implemented on site and regular inspections were carried out to ensure that the environmental conditions are acceptable.
- 1.3 The EM&A programme was carried out by the ET in accordance with the EM&A Manual requirements. It is concluded from the EM&A works that adequate environmental mitigation measures have been implemented by the contractor where appropriate in the reporting quarter.
- 1.4 The construction commencement date of the project was revised on 27 April 2021. The construction commencement date of provision of village sewerage to the unsewered areas of Po Toi O has been revised from 1 March 2021 to 16 June 2021, and the construction commencement date of village sewerage construction of the local sewage treatment plant (STP) has been revised from 10 May 2021 to 16 June 2021. In view of the revised construction commencement date, the EM&A programme was subsequently suspended from 28 April 2021 until 16 June 2021.

Exceedance of Action and Limit Level

- 1.5 There was no action or limit level exceedance record of construction noise and air quality was recorded in the reporting quarter.

Implementation of Mitigation Measures


- 1.6 Construction phase weekly site inspections were carried out to confirm the implementation measures undertaken by the Contractor in the reporting quarter. The status of implementation of mitigation measures during the reporting quarter is shown in **Appendix E**.

Record of Complaints

- 1.7 No complaints, notification of summons and successful prosecution was received in the reporting period. No public engagement activity was conducted in the reporting quarter.
- 1.8 No air quality, noise and water complaints during 0700 – 1900 hours on normal weekdays was received in the reporting quarter.

Record of Notification of Summons and Successful Prosecutions

- 1.9 No notification of summons and successful prosecution was received in the reporting period. No public engagement activity was conducted in the reporting quarter.

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	5
		Ref#	EMA2204/03/01
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

2. INTRODUCTION

Project Info


- 2.1 Société Générale de Surveillance (SGS) Hong Kong Limited has been appointed by Drainage Services Department (DSD) as the Environmental Team (ET) to undertake the EM&A programme during construction phase of the Project in accordance to the approved EM&A Manual for the proposed sewerage works in Po Toi O (hereafter as “The Project”), an environmental enhancement project that aims to improve environmental hygiene of the Po Toi O area.
- 2.2 The Quarterly EM&A Report is prepared in accordance with the section 13.6 of the EM&A Manual. This Quarterly EM&A Report presents the monitoring works conducted from 1 June 2021 to August 31, 2022. The purpose of this report is to summarize the findings in the EM&A of the project over the reporting quarter.

Project Organization

- 2.3 The project organization chart, key personnel contact names and numbers and lines of communication with respect to the onsite environmental management performance is shown in **Appendix C**.

Environmental Status in the Reporting Quarter

- 2.4 During the reporting quarter, construction works at Po Toi O undertaken include:
- Major activities in the reporting quarter:
 1. Construction of village sewer;
 2. Slope works.
 3. Preparation work (Vibrio Coring) for HDD
 4. Slope cutting (Total 2850 m³ solid materials to be removed, i.e. about 4275 m³ loosen materials. 23.8m³ loosen materials to be removed per day, i.e. 4 trips of dumping per day) (installation of silt curtain at the outlet of the box culvert)
 - Major activities in the upcoming quarter:
 1. Construction of village sewer;
 2. Slope works.
 3. Construction of temporary working platform and installation of silt curtain for HDD
- 2.5 The Construction Works Programme of the Project is provided in **Appendix D**.

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	6
		Ref#	EMA2204/03/01
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

3. SUMMARY OF EM&A MONITORING REQUIREMENTS

3.1 In accordance with the EM&A Manual, environmental parameters including air quality, noise have been monitored in the reporting quarter. The specific parameters, monitoring frequency and the respective Action and Limit levels are given in **Table 3-1**. Locations of the monitoring stations are provided in **Appendix A**.


Table 3-1 Summary of Impact EM&A Requirements

Parameters ²	Descriptions	Locations ¹	Frequencies	Action Level	Limit Level
Air Quality	24-hour TSP	AMS1N	At least once every 6 days	319 µg/m ³	500 µg/m ³
	24-hour TSP	AMS2N1		279 µg/m ³	500 µg/m ³
	24-hour TSP	AMS3N		303 µg/m ³	500 µg/m ³
	24-hour TSP	AMS4N		278 µg/m ³	500 µg/m ³
	1-hour TSP	AMS1N		153 µg/m ³	260 µg/m ³
	1-hour TSP	AMS2N1		179 µg/m ³	260 µg/m ³
	1-hour TSP	AMS3N		158 µg/m ³	260 µg/m ³
	1-hour TSP	AMS4N		144 µg/m ³	260 µg/m ³
Noise	Leq, 30 minutes	NMS1N	At least once per week	When one documented complaint is received from any one of the noise sensitive receivers	75 dB(A)*
	Leq, 30 minutes	NMS2N1			
	Leq, 30 minutes	NMS3N			
	Leq, 30 minutes	NMS4N			

Notes:


1- Due to several limitations (i.e. EM&A approved monitoring stations not accessible) identified at the air quality and noise monitoring stations in the Approved EM&A Manual for the Project, the monitoring location AMS1 – AMS4 & NMS1 – NMS4 were replaced by alternative monitoring location AMS1N – AMS4N & NMS1N – NMS4N, which was approved by ER and IEC.

2- Marine construction was not commenced within the reporting quarter; hence impact EM&A requirement for water quality monitoring is not included in this table.

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	7
		Ref#	EMA2204/03/01
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

Environmental Mitigation Measures

- 3.2 Environmental mitigation measures have been recommended in the EM&A Manual. Summary implementation status of the environmental mitigation measures is provided in **Appendix E**.

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	8
		Ref#	EMA2204/03/01
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

4. SUMMARY OF EM&A MONITORING RESULTS


4.1 In accordance with the EM&A Manual, impact monitoring has been conducted in the reporting quarter. Meteorological data for the reporting quarter have been extracted from Hong Kong Observatory and present in **Appendix F**. Monitoring data with graphical presentation for the reporting quarter are show in **Appendix G**. A summary on the monitoring results is presented in **Table 4.1**.

Table 4-1 Summary of Monitoring Data

Parameter ¹	Monitoring Location	Minimum	Maximum	Average
Air Quality				
24-hour TSP	AMS1N	13 µg/m ³	113 µg/m ³	46.1 µg/m ³
24-hour TSP	AMS2N1	14 µg/m ³	103 µg/m ³	46.2 µg/m ³
24-hour TSP	AMS3N	11 µg/m ³	124 µg/m ³	40.9 µg/m ³
24-hour TSP	AMS4N	13 µg/m ³	106 µg/m ³	41.0 µg/m ³
1-hour TSP	AMS1N	16 µg/m ³	119 µg/m ³	51.6 µg/m ³
1-hour TSP	AMS2N1	14 µg/m ³	197 µg/m ³	57.5 µg/m ³
1-hour TSP	AMS3N	12 µg/m ³	126 µg/m ³	46.2 µg/m ³
1-hour TSP	AMS4N	16 µg/m ³	108 µg/m ³	47.3 µg/m ³
Construction Noise				
Leq(30min)	NMS1N	54.2 dB(A)	71.8 dB(A)	63 dB(A)
Leq(30min)	NMS2N1	49.7 dB(A)	72.9 dB(A)	63.8 dB(A)
Leq(30min)	NMS3N	51.7 dB(A)	68.8 dB(A)	62.6 dB(A)
Leq(30min)	NMS4N	47.4 dB(A)	70.5 dB(A)	61.2 dB(A)

Remarks:

1. Marine construction was not commenced within the reporting quarter; hence no water quality monitoring data summarized in this table.
2. A correction of +3 dB(A) was made to the free field measurements

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	9
			Ref#	EMA2204/03/01
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


Other Influencing Factors of the Monitoring Results

Air quality monitoring

- 4.2 Major emission sources during air quality monitoring in the reporting quarter were mainly vehicle emission from Po Toi O Chuen Road and nearby residents' activities.

Noise monitoring

- 4.3 Major noise sources during noise monitoring in the reporting quarter were mainly road traffic noise.

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	10
		Ref#	EMA2204/03/01
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


Monitoring Exceedances

4.4 Summary of the exceedances in the reporting quarter is tabulated in **Table 4.2**.

Monitoring Station	Parameter ¹	No. of Exceedance		Action Taken
		Action Level	Limit Level	
Air Quality				
AMS1N	24-hour TSP	0	0	N/A
AMS2N1	24-hour TSP	0	0	N/A
AMS3N	24-hour TSP	0	0	N/A
AMS4N	24-hour TSP	0	0	N/A
AMS1N	1-hour TSP	0	0	N/A
AMS2N1	1-hour TSP	0	0	N/A
AMS3N	1-hour TSP	0	0	N/A
AMS4N	1-hour TSP	0	0	N/A
Construction Noise				
NMS1N	Leq(30min)	0	0	N/A
NMS2N1	Leq(30min)	0	0	N/A
NMS3N	Leq(30min)	0	0	N/A
NMS4N	Leq(30min)	0	0	N/A

Remarks:

1. Marine construction was not commenced in the reporting quarter, no water quality monitoring was required in according to approved EM&A manual; hence no water quality monitoring data was recorded.

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	11
		Ref#	EMA2204/03/01
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

1-hour TSP Monitoring


- 4.5 All 1-hour TSP monitoring was conducted as scheduled in the reporting quarter. No action/ limit level exceedance was recorded.

24-hour TSP Monitoring

- 4.6 All 24-hour TSP monitoring was conducted as scheduled in the reporting quarter. No action/ limit level exceedance was recorded.


Construction Noise Monitoring

- 4.7 All construction noise monitoring was conducted as scheduled in the reporting quarter. No action/ limit level exceedance was recorded.

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	12
		Ref#	EMA2204/03/01
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


5. WASTE MANAGEMENT

- 5.1 As advised by the Contractor, 1,414 m³ of inert C&D material was generated and disposal to Tseung Kwan O Area 137 Fill Bank (TKO137FB) in the reporting quarter. For C&D wastes, 0.2 m³ of general refuse was disposed of at NENT landfill, 0 kg waste were collected by recycling contractors, and 0 kg of chemical wastes was collected by licensed Contractors in the reporting quarter.
- 5.2 The detailed summary of waste flow is show in **Appendix H**.

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	13
		Ref#	EMA2204/03/01
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

6. ENVIRONMENTAL NON-CONFORMANCE

- 6.1 For this reporting quarter, one environmental complaint was received on 28 December 2021 via EPD's mail. The complaint from a member of the public regarding environmental nuisance caused by construction waste and other waste. Refer to the joint investigation result on 30 December 2021 and the associated photo record, the complaint regarding construction waste and other waste placed in front of the House 1 of Seacrest Villas is not project related.
- 6.2 No non-compliance and environmental related prosecution or notification of summons was received. There was no breach of Action or Limit Levels for Air Quality and Noise monitoring in the reporting quarter.
- 6.3 Statistics on complaints, notifications of summons, successful prosecutions and public engagement activities are summarized in **Appendix I**.

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	14
		Ref#	EMA2204/03/01
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

7. COMMENTS, RECOMMENDATIONS AND CONCLUSION

Comments


- 7.1 Based on the observations made during site audits and construction dust and noise monitoring results, no non-compliances and exceedances of air quality and noise limits were recorded.

Recommendations


- 7.2 Reviewing the implementation of the recommended mitigation measures in the EM&A Manual, it was observed that they were effective and efficient in controlling the potential impacts due to construction of the project during the reporting quarterly. Review of the effectiveness and efficiency of the EM&A programme will continue, and recommendations will be provided to remediate any potential impacts due to the project and to improve the EM&A programme if deficiencies of the existing EM&A programme are identified.


Conclusion

- 7.3 The EM&A programme as recommended in the EM&A Manual has been undertaken since the construction works of Port Shelter Sewerage, Stage 3 – Sewerage works at Po Toi O works commenced on 1 March 2021.
- 7.4 Monitoring of air quality and noise with respect to the Project is underway. In particular, the 1-hour TSP, 24-hour TSP and noise level (as Leq, 30 minutes) under monitoring have been checked against established Action and Limit levels. There was no breach of Action and Limit Levels for 1-hour TSP, 24-hour TSP and noise monitoring in the reporting quarter.
- 7.5 One complaint was received on 28 December 2021 via EPD's mail. The complaint from a member of the public regarding environmental nuisance caused by construction waste and other waste. Refer to the joint investigation result on 30 December 2021 and the associated photo record, the complaint regarding construction waste and other waste placed in front of the House 1 of Seacrest Villas is not project related.
- 7.6 No notifications of summons or successful prosecution were received during the reporting quarter.


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	A-1
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


APPENDIX A - LOCATION OF THE MONITORING AND CONTROL STATIONS

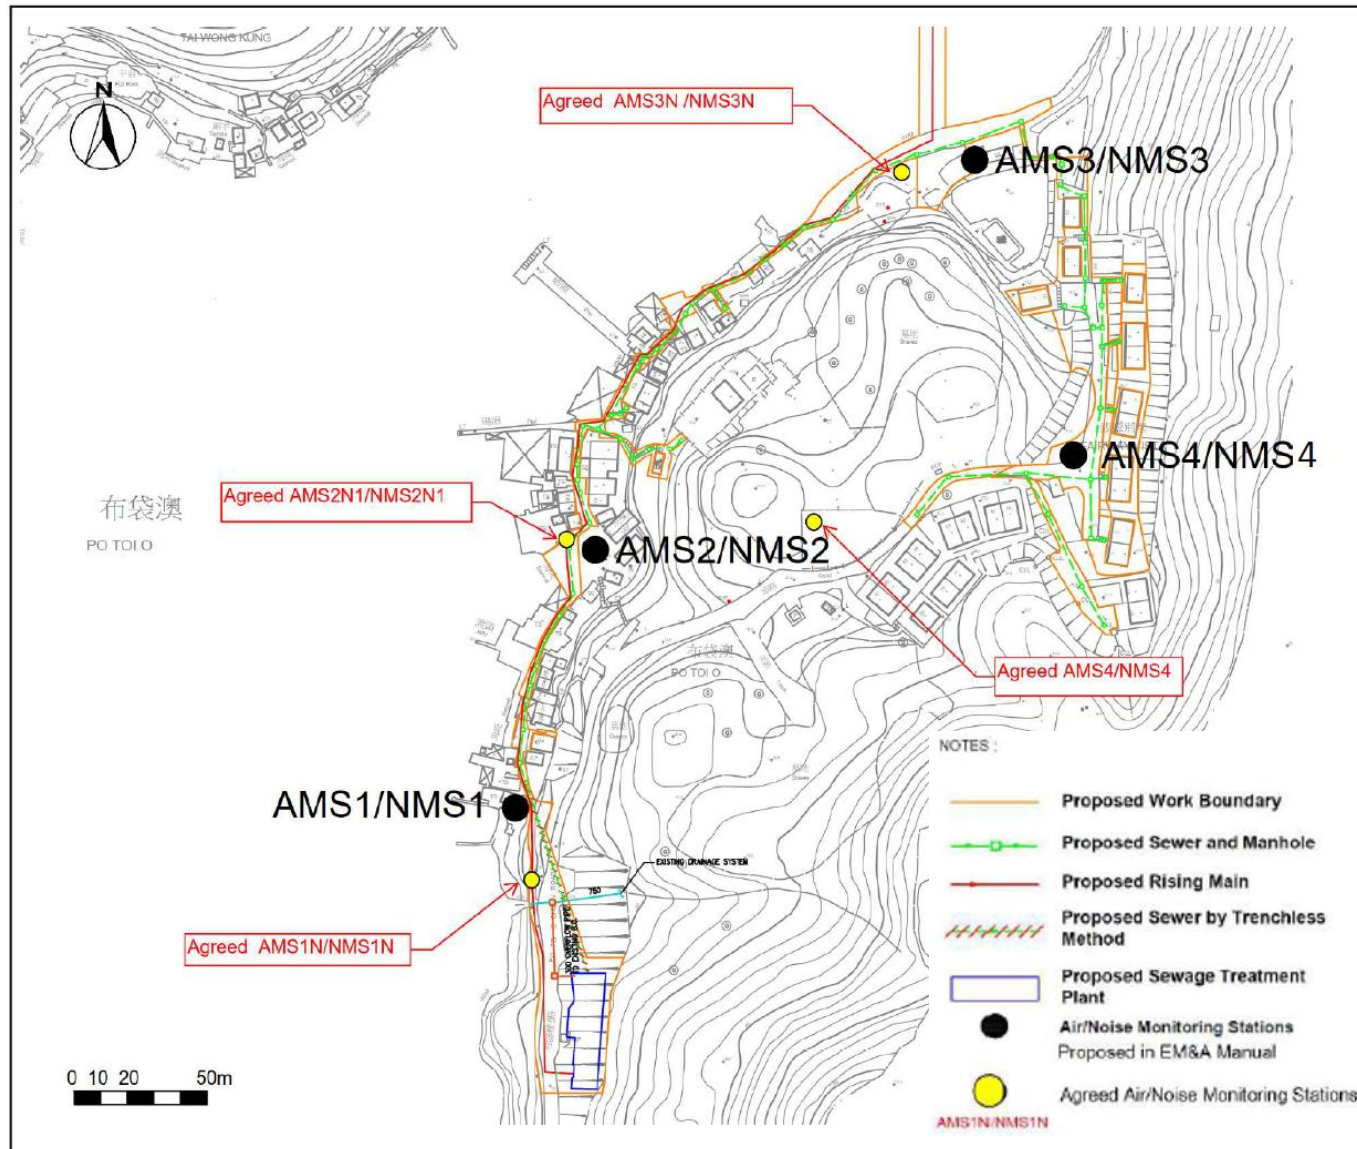


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	B-1
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


APPENDIX B - LAYOUT PLAN OF PROJECT AREA


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	B-2
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22

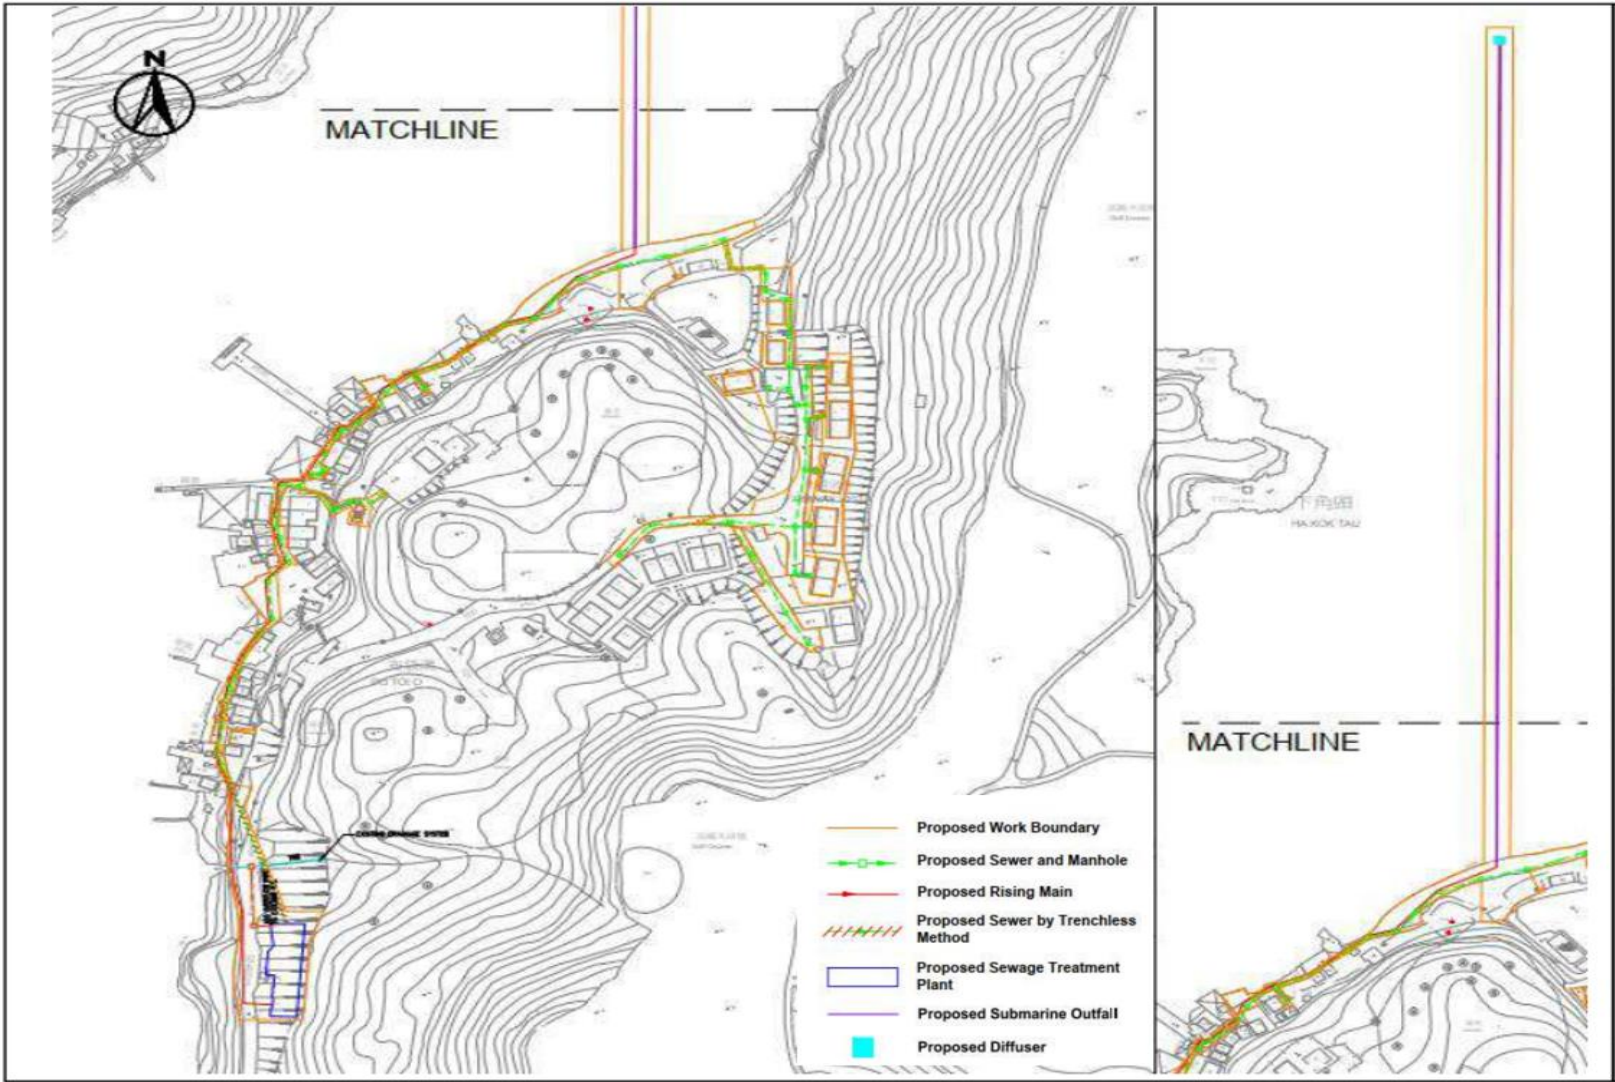


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	C-1
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


APPENDIX C - PROJECT ORGANIZATION CHART & CONTACT INFORMATION OF KEY PERSONNEL

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	C-2
	Quarterly EM&A Report		Ref#	-
			Rev.	01
			Date	Sep 22

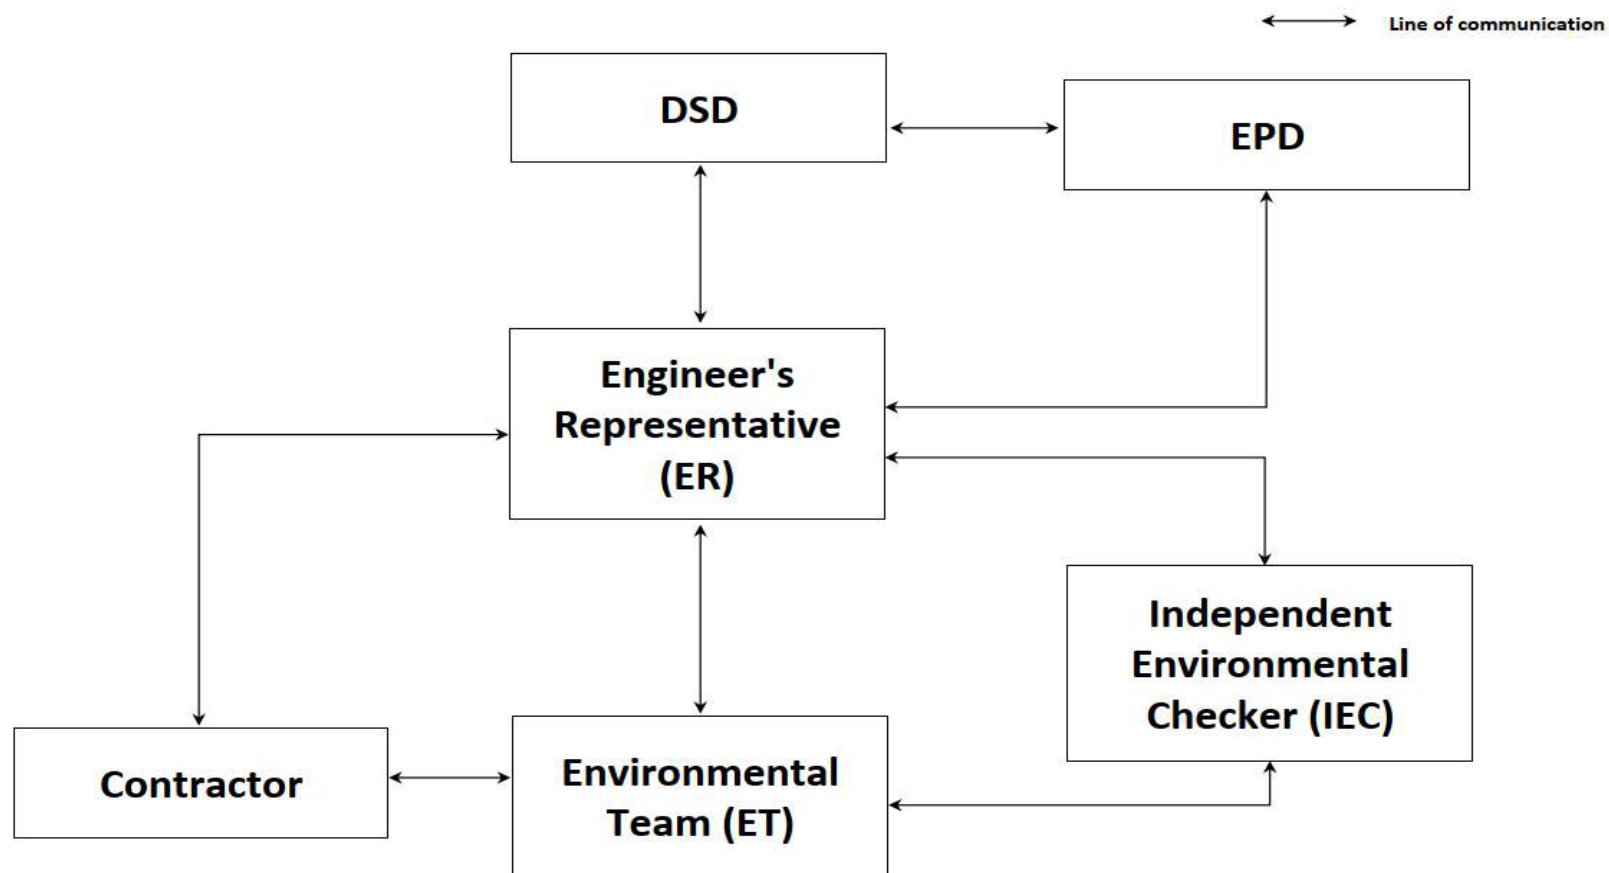



	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	C-3
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

Position	Party	Name	Telephone
Project Proponent	Drainage Services Department (DSD)	Ms. Janet Yuen	2594 7353
Senior Resident Engineer (SRE)	Binnies Hong Kong Limited (Binnies)	Mr. Eugene Chan	6392 3809
Independent Environmental Checker (IEC)	Acuity Sustainability Consulting Limited (ASC)	Dr. F.C. Tsang	2698 8060
Environmental Team (ET)	Société Générale de Surveillance (SGS) Hong Kong Limited	Mr. Roy Hung	2204 8305
Environmental Officer	China Geo-engineering Corporation (CGC)	Mr. Jasper Tang	6997 5530
Hotline Telephone Number			6902 2820


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	D-1
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

APPENDIX D – CONSTRUCTION WORK PROGRAMME

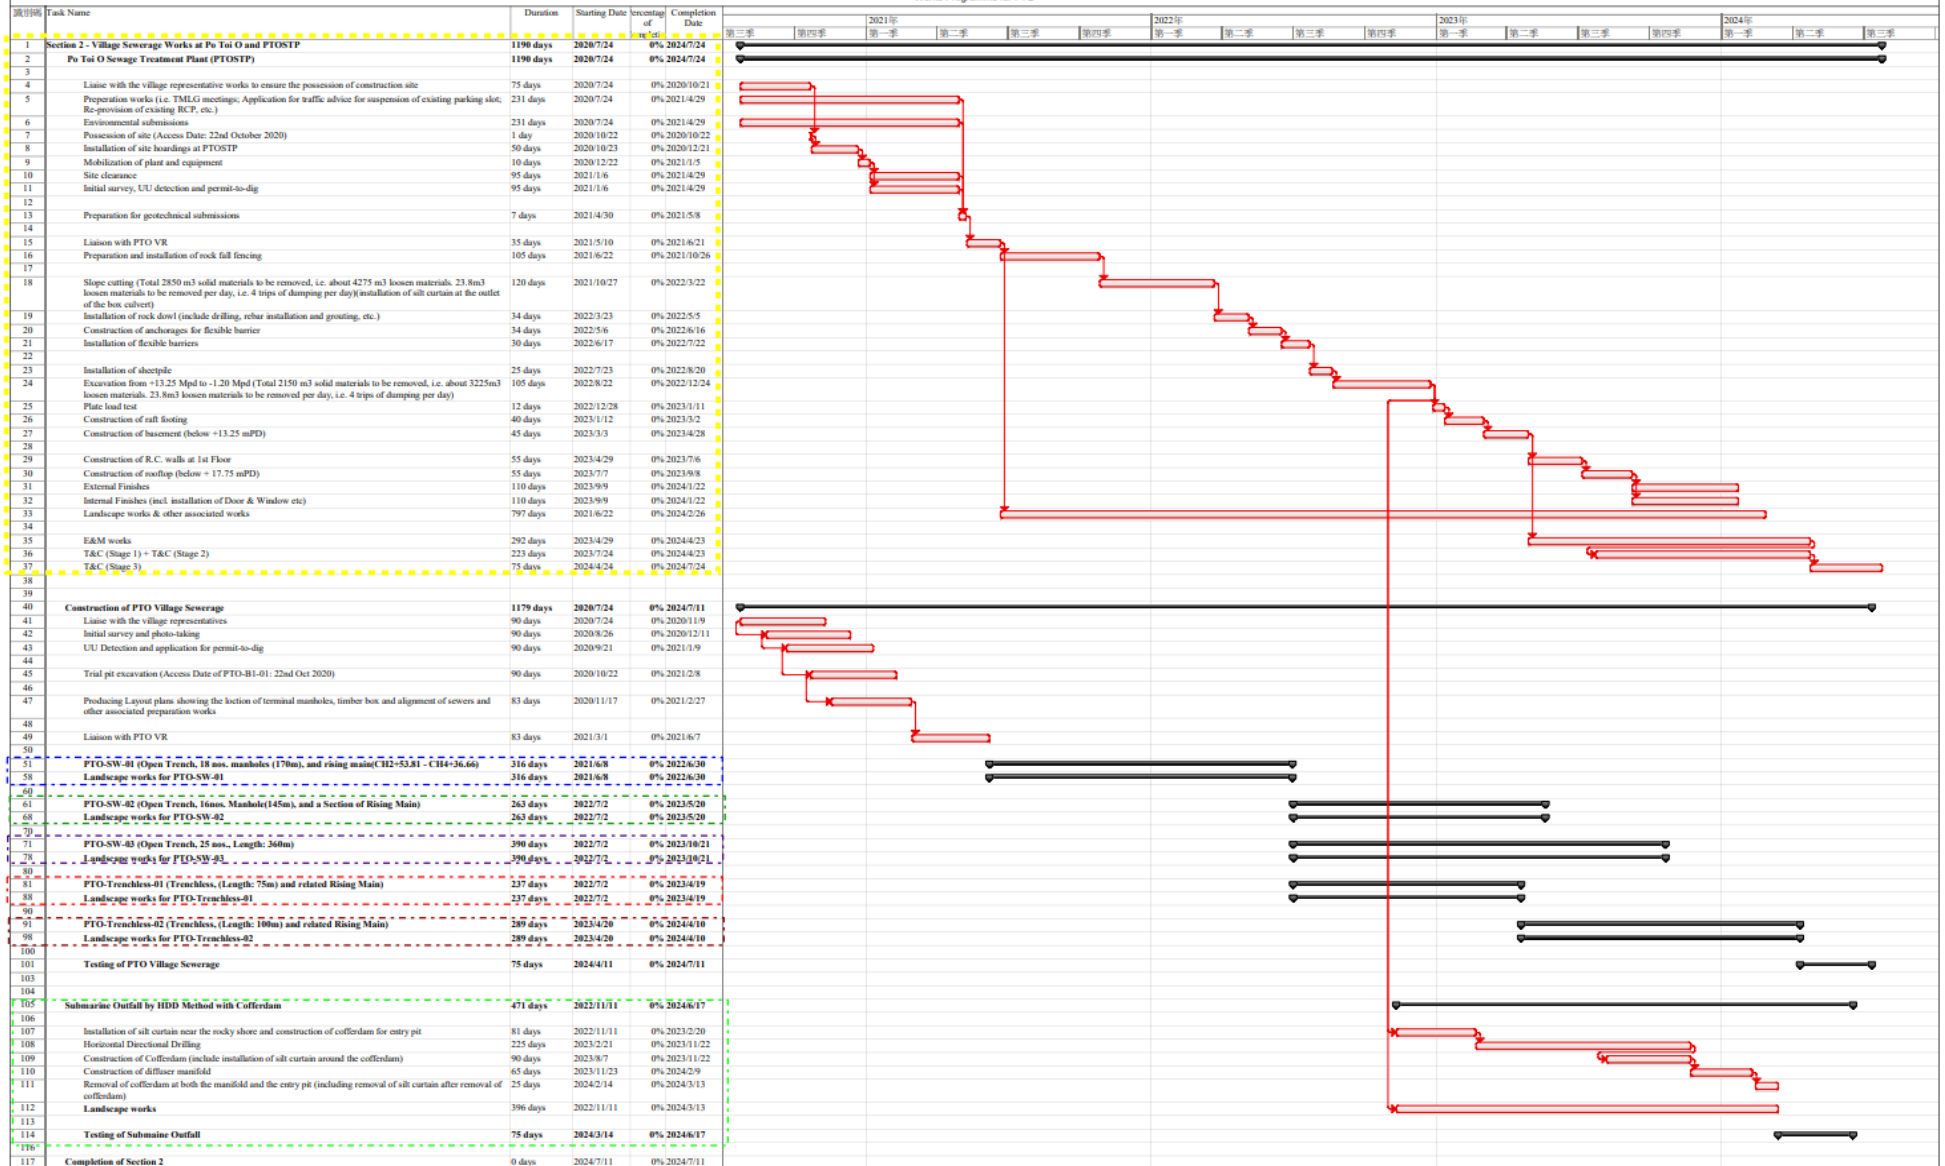


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-1
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


APPENDIX E - IMPLETEMENTATION OF RECOMMENDED MITGATION MEASURES

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-2
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Air Quality Impact	A10	Good housekeeping to minimize dust generation, e.g. by properly handling and storing dusty materials.	✓	Rem.	✓
	A11	Adopt dust control measures, such as dust suppression using water spray on exposed soil at least 4 times a day, in areas with dusty construction activities and during material handling.	✓	✓	Obs.
	A12	Store cement bags in shelter with 3 sides and the top covered by impervious materials if the stack exceeds 20 bags.	✓	✓	✓
	A13	Maintain a reasonable height when dropping excavated materials to limit dust generation.	✓	✓	✓
	A14	Limit vehicle speed within construction site and in Po Toi O to 10km/hr and confine vehicle movement in haul road.	✓	✓	✓
	A15	Minimize exposed earth after completion of work in a certain area by hydroseeding, vegetating, soil compacting or covering with bitumen.	✓	✓	✓
	A16	Provide wheel washing at construction site exit to clean the vehicle body and wheel.	N/A	Obs.	✓

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-3
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Air Quality Impact	A17	Cover materials on trucks before leaving the construction site to prevent debris from dropping during traffic movement or being blown away by wind	✓	Rem.	✓
	A18	Regular maintenance of plant equipment to prevent black smoke Emission.	✓	✓	✓
	A19	Throttle down or switch off unused machines or machine in intermittent use	✓	✓	✓
	A20	Minimize excavation area as far as possible.	✓	✓	✓
	A21	Store odorous excavated materials in covered containers and remove off-site as soon as possible within 24 hours.	✓	✓	✓
	A22	Cover open stockpiles of construction materials (e.g. aggregates, sand and fill materials) with impermeable materials such as tarpaulin during rainstorms.	Obs.	✓	✓
	A23	Hoarding of not less than 2.4 m high shall be erected from ground level to surround the construction site for sewage treatment plant along Po Toi O Chuen Road except for a construction site entrance or exit.	N/A	N/A	Rem.
	A24	Carry out air quality monitoring throughout the construction period	✓	✓	✓

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-4
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Noise Impact	N1	Use hand-held plant equipment or manual equipment within village area.	✓	✓	✓
	N2	For HDD, enclose the stationary plant equipment on three sides with cover. Only the side facing the sea shall be opened for heat exhaustion.	N/A	N/A	N/A
	N3	Generator should be placed at a fixed location at least 5-6m away from the NSRs and screened by noise barrier whenever excavation work must be carried out at their front doors.	✓	✓	✓
	N4	Avoid carrying out noisy activities at the same time. The work front of village sewer installation near NSRs PTO_N1 and PTO_N3 shall not be conducted concurrently with installation of Po Toi O Chuen Road sewer and horizontal directional drilling respectively.	✓	✓	✓
	N5	Vibratory poker shall only be operated 4m away from NSR and with noise barrier properly erected. Surfacing work within 4m from NSR shall be carried out by manual method.	✓	✓	✓
	N6	Schedule noisy activities to minimize exposure of nearby NSRs to high levels of construction noise.	✓	✓	✓

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-5
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Noise Impact	N7	Use Quality Powered Mechanical Equipment (QPME) which produces lower noise level.	✓	✓	✓
	N8	Erect 3m high mobile barriers with skid footing and a small cantilevered upper portion within a few meters of stationary plants and within about 5m of more mobile plant.	✓	✓	✓
	N9	Hand-held breaker shall be fitted with mufflers. A movable enclosure made up of plywood is proposed to surround both worker and breaker during breaking process. The internal wall of the enclosure should be laid with sound absorbent such as mineral wool.	✓	✓	✓
	N10	Regular maintenance of plant equipment to prevent noise emission due to impair.	✓	✓	✓
	N11	Position mobile noisy equipment in location and direction away from NSR.	✓	✓	✓
	N12	Use silencer or muffler on plant equipment and should be properly maintained.	✓	✓	✓
	N13	Throttle down or switch off unused machines or machine in intermittent use between work.	✓	✓	✓
	N14	Make good use of stockpiles or other structures for noise screening.	✓	✓	✓

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-6
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Noise Impact	N15	Mobile plant should be sited as far away from NSRs as possible	✓	✓	✓
	N16	Reduce the percentage on-time for some noisy PMEs	✓	✓	✓
	N17	Carry out noise monitoring	✓	✓	✓

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-7
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Water Quality Impact	W1	Divert the water from outfall of W3 (stream near Fairway Vista) during open cut excavation for laying of gravity sewer nearby.	✓	✓	✓
	W2	Place sandbag along the upstream section of the stream near Fairway Vista and along rocky shore during open cut excavation for laying of gravity sewers/rising mains nearby.	✓	✓	✓
	W3	Intercept the water from u-channel at the foot of the slope where the STP will be built.	✓	✓	✓
	W4	Install cofferdam around the proposed excavation area for entry pit of HDD work to prevent falling of debris into the sea	N/A	N/A	N/A
	W5	Install sheet piles in marine waters by vibratory action.	N/A	N/A	N/A
	W6	Marine works (dredging, construction and installation works at diffuser location, backfilling) shall be carried out inside the watertight cofferdam. The cofferdam can only be removed after completion of work.	N/A	N/A	N/A
	W7	Dredging should be carried out by grab dredgers anchored outside the cofferdam. The marine sediment should be placed in sealed compartment of the marine barge.	N/A	N/A	N/A
	W8	Water removed from the cofferdam should be desilted before discharge back into the sea.	N/A	N/A	N/A

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-8
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Water Quality Impact	W9	Carry out water quality monitoring at water sensitive receivers before and during cofferdam installation works, throughout dredging works, and during cofferdam extraction works.	N/A	N/A	N/A
	W12	Set up sedimentation tank for settling suspended solids in wastewater before discharge into storm drains. Sand/silt removal facilities such as sand traps, silt traps and sedimentation basin should be provided with adequate capacity.	✓	✓	✓
	W13	Follow ProPECC PN 1/94 "Construction Site Drainage" as far as practicable	Rem.	✓	✓
	W14	Construct catchpits and perimeter channels prior to commencement of site formation works and earthworks	Rem.	✓	✓
	W15	Maintain silt removal facilities, channels, manholes before and after rainstorm.	Obs.	✓	Rem.
	W16	Remove silt and grit from silt trap at regular interval.	✓	✓	✓
	W17	Well design works program to minimize the work areas to minimize the soil exposure and site runoff.	✓	✓	✓

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-9
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Water Quality Impact	W18	Arrange soil excavation works outside rainy seasons (April to September) as far as possible. If this cannot be achieved, the following measures should be implemented:	✓	✓	✓
		Cover temporary exposed slope surfaces with impermeable materials, e.g. tarpaulin.	✓	✓	✓
		Protect temporary access roads by crushed stone or gravel.	✓	✓	✓
		Provide intercepting channels along crest/edge of excavation.	✓	✓	✓
	W19	Minimize exposed earth after completion of work in a certain area by hydroseeding, vegetating, soil compacting or covering with bitumen.	✓	✓	✓
	W20	Prevent rainwater from entering trenches. Excavation of trenches should be dug and backfilled in short sections during rainy seasons. Remove silt in rainwater collected from the trenches or foundation excavations prior to discharge to storm drains.	✓	✓	✓

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-10
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Water Quality Impact	W21	Cover open stockpiles of construction materials (e.g. aggregates, sand and fill materials) with impermeable materials such as tarpaulin during rainstorms.	✓	✓	✓
	W22	Cover and temporary seal manholes to prevent silt, construction materials or debris and surface runoff from entering foul sewers.	✓	✓	✓
	W23	Remove waste from the construction site regularly.	✓	✓	✓
	W24	Apply discharge license for effluent discharge. Treat the discharge to comply with the requirement in TM-DSS.	✓	✓	Rem.
	W25	Reuse treated effluent onsite, e.g. dust suppression, wheel washing and general cleaning.	✓	✓	✓
	W26	Monitor effluent water quality.	✓	✓	✓
	W27	Register as chemical waste producer if chemical waste will be generated.	✓	✓	✓
	W28	Perform maintenance of vehicles and equipment that have oil leakage and spillage potential on hard standings within a bunded area with sumps and oil interceptors.	✓	Obs.	Obs.

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-11
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Water Quality Impact	W29	Dispose chemical waste in accordance to Waste Disposal Ordinance. Follow the <i>Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes</i> , examples as follows:	✓	✓	✓
		Store chemical wastes with suitable containers to avoid leakage or spillage during storage, handling and transport.	Obs.	✓	✓
		Label chemical waste containers according to the CoP to notify and warn the waste handlers.	✓	✓	✓
		Store chemical wastes at designated safe location with adequate space.	✓	✓	✓
	W30	Provide sufficient chemical toilets with regular maintenance by registered waste collector where necessary.	✓	✓	✓
	W31	Provide a drip tray/container underneath the bentonite recycling system.	N/A	N/A	N/A
	W32	Carry out regular site inspection to audit the implementation of mitigation measures.	✓	✓	✓
	W33	Carry out effluent quality monitoring at location specified in the discharge license.	✓	✓	✓

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-12
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Waste/Chemical Management	WM4	Allocate an area for waste sorting and storage of C&D materials into the following categories for reuse, recycle or disposal if possible. Remove waste from the construction site for sorting once generated if no suitable space can be identified.	✓	✓	✓
		Excavated materials suitable for reuse	✓	✓	✓
		Inert C&D materials (or public fill) for disposal offsite	✓	✓	✓
		Non-inert C&D materials (or C&D waste) for disposal at landfills	✓	✓	✓
		Records of quantities generated/ recycled/ disposed maintained?	✓	✓	✓
		Chemical waste	✓	✓	✓
		Bentonite slurry for reconditioning and reuse	N/A	N/A	N/A
		General refuse	✓	✓	✓

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-13
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Waste/Chemical Management	WM5	Adopt good site practice as follows:	✓	✓	✓
		Provide training to workers on site cleanliness, waste management (waste reduction, reuse and recycle) and chemical handling procedures.	✓	✓	✓
		Cover waste materials with tarpaulin or in enclosure during transportation.	✓	✓	✓
		Maintain drainage systems, sumps and oil interceptors.	✓	✓	✓
		Sort out chemical waste for proper handling and treatment onsite or offsite.	✓	✓	✓

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-14
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Waste/Chemical Management	WM6	Adopt good site practice as follows:	✓	✓	✓
		Allocate area/containers for sorting, recovering and storing waste for reuse, recycle or disposal (e.g. demolition debris and excavated materials, general refuse like aluminum cans.) Remove waste from the construction site for sorting once generated if no suitable space can be identified.	✓	✓	✓
		Allocate area for proper storage of construction materials to prevent contamination prevent soil contamination?	✓	✓	✓
		Maintain drainage systems, sumps and oil interceptors.	✓	✓	✓
		Minimize wastage through careful planning and avoiding over purchase of construction materials	✓	✓	✓

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-15
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Waste/Chemical Management	WM7	Prepare and implement a site-specific Waste Management Plan (WMP) as part of Environmental Management Plan (EMP) in accordance with ETWB TCW No. 19/2005. Detail waste management method in the form of avoidance, reuse, recovery, recycling, storage, collection, treatment and disposal according to the recommendations on the EIA and EM&A Manual. It should be approved by the ER and regularly reviewed.	✓	✓	✓
	WM8	Store waste materials properly as follows:	✓	✓	✓
		Avoid contamination by proper handling and storing waste.	✓	✓	✓
		Prevent erosion by covering waste.	✓	✓	✓
		Apply water spray on excavated materials.	✓	✓	✓
		Maintain and clean storage area regularly.	✓	✓	✓
		Sort and stockpile different materials at designated location to enhance reuse.	✓	✓	✓

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-16
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Waste/Chemical Management	WM9	Apply for relevant waste disposal permits in accordance with the Waste Disposal Ordinance (Cap. 354), Waste Disposal (Charges for Disposal of Construction Waste) Regulation (Cap. 345) and the Land (Miscellaneous Provisions) Ordinance (Cap.28) Dumping at Sea Ordinance (Cap. 466).	✓	✓	✓
	WM10	Hire licensed waste disposal contractors for waste collection and removal. Dispose waste at licensed waste disposal facilities	✓	✓	✓
	WM11	Implement trip-ticket system for recording the amount of waste generated, recycled and disposed, including chemical wastes	✓	✓	✓
	WM12	Provide wheel washing at construction site exit to clean the vehicle body and wheel.	N/A	N/A	✓
	WM13	Reduce water content in wet spoil generated from piling work by mixing with dry materials. Only dispose treated spoil with less than 25% dry density to Public Fill Reception Facilities	✓	✓	✓

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-17
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Waste/Chemical Management	WM14	Dispose dry waste or waste with less than 70% water content by weight to landfill.	✓	✓	✓
	WM15	Follow the Code of Practice on the Packaging, Labelling and Storage of Chemical Waste as follows:	✓	✓	✓
		Store chemical wastes with suitable containers. Seal and maintain the container to avoid leakage or spillage during storage, handling and transport.	✓	✓	✓
		Label chemical waste containers in both English and Chinese with instructions in accordance to Schedule 2 of the Waste Disposal (Chemical Waste) (General) Regulation.	✓	✓	✓
		The container capacity should be smaller than 450 litres unless agreed by the EPD.	✓	✓	✓

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-18
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Waste/Chemical Management	WM16	Comply with the requirement of the chemical storage area:	✓	✓	✓
		Store only chemical waste and label clearly the chemical characters of the waste.	✓	✓	✓
		Have at least 3 sides enclosed and protected from rainfall with cover.	✓	✓	✓
		Provide sufficient ventilation	✓	✓	✓
		Have impermeable floor and has bunds to contain 110% of the capacity of the largest container or 20% of the total volume of the stored waste in the area, whichever is larger			
	WM17	Transfer used lubricants, waste oils and other chemicals to oil recycling companies, if possible, and empty oil drums for reuse or refill. No direct or indirect discharge is permitted	✓	✓	✓
	WM18	Hire licensed chemical waste disposal contractors for waste collection and removal. Dispose chemical waste at the approved Chemical Waste Treatment Centre at Tsing Yi or other licensed facility.	✓	✓	✓
	WM19	Hire reputable waste collector to separately collect and dispose general refuse from other wastes. Cover the waste to prevent being blown away.	✓	✓	✓

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-19
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Waste/Chemical Management	WM20	Provide recycling bins for sorting out recyclables for collection by recycling companies. Non-recyclables should be removed to designated landfills every day by licensed collectors to prevent environmental and health nuisance.	✓	✓	✓
	WM21	Organize training and reminders to site staff on waste minimization through avoidance and reduction, reusing and recycling.	✓	✓	✓
	WM22	Used bentonite shall be reconditioned onsite and reused as far as practical to minimize wastage. If this is deemed not viable, the used bentonite shall be delivered offsite for reconditioning.	N/A	N/A	N/A
	WM23	Characterize the sediment quality of the marine sediment to be dredged and submit a Sediment Quality Report for EPD's approval. Dispose the dredged marine sediment in accordance with ETWB TC(W) No. 34/2002.	N/A	N/A	N/A

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-20
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Ecology	E1	Erect bright colour fencing along the boundary of the undisturbed region of the shrubland and woodland, and around <i>Diospyros vaccinioides</i> , a plant species of conservation importance, near the work boundary to remind workers not to trespass or occupy the area, and to be careful during operation of equipment.	✓	✓	✓
	E2	Reinstate the disturbed rocky shore with the rocks temporarily removed.	N/A	N/A	N/A
	E3	Place sandbag around the section of W3 next to Fairway Vista and along the shore during open cut excavation for laying of gravity sewer nearby.	✓	✓	✓
	E4	Temporarily divert the water from outfall of W3 away from excavation area.	✓	✓	✓
	E5	Inspect the condition of the <i>Diospyros vaccinioides</i> near the work boundary as part of weekly site audit.	✓	✓	✓
	E6	Erection of hoarding, fencing or provision of clear demarcation of work zones	✓	✓	✓

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-21
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Ecology	E7	Designate areas for placement of equipment, building materials and wastes away from the natural environment.	✓	✓	✓
	E8	Carry out tree preservation and compensatory tree planting will be carried out in accordance with DEVB TCW No. 7/2015.	✓	✓	✓

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-22
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22

Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Landscape and Visual	CM8	Protective materials to be provided to natural rocky coastline to prevent damage to existing landform from plant and machinery during temporary drilling operations. Reinstatement following removal of plant & equipment to original or improved condition shall be undertaken.	N/A	N/A	N/A
	OM2	Use of appropriate building materials and colours for Sewage Treatment Plant to complement surroundings	✓	✓	N/A
	CM1	The construction area and contractor's temporary works areas should be minimized to avoid impacts on adjacent landscape. All slope excavation shall take place from within the work boundary to minimize impacts on adjacent slopes.	✓	✓	✓
	CM2	Reduction of construction period to practical minimum.	✓	✓	✓
	CM3	Construction traffic (land and sea) including construction plant, construction vessels and barges to be kept to a practical minimum.	✓	✓	✓
	CM4	Erection of decorative mesh screens or construction hoardings and/or temporary noise barriers around works areas in visually unobtrusive colors.	Rem.	✓	✓
	CM5	Avoidance of excessive height and bulk of site buildings and structures.	✓	✓	✓

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-23
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22

Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Landscape and Visual	CM6	Protective materials to be provided to natural rocky coastline to prevent damage to existing landform from plant and machinery during temporary drilling operations. Reinstatement following removal of plant & equipment to original or improved condition shall be undertaken.	✓	✓	✓
	CM7	All existing trees shall be carefully protected during construction. A Detailed Tree Protection Specification shall be provided in the Contract Specification. Under this specification, the Contractor shall be required to submit, for approval, a detailed working method statement for the protection of trees prior to undertaking any works adjacent to all retained trees, including trees in contractor's works areas. Tree risk assessment shall be undertaken to all existing trees within the project site as per "Guidelines for Tree Risk Assessment and Management Arrangement"	✓	✓	✓
	OM3	Lighting units to be directional and minimize unnecessary light spill and glare.	✓	✓	N/A
	OM4	Greening measures to reinstate the landscape which are appropriate to the context, including tree and shrub planting and vertical greening, shall be implemented.	✓	✓	N/A

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	E-24
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22

Item	EM & A Ref.	EM&A Manual Recommended Mitigation/ Actions	Implementation Status		
			June 2022	July 2022	August 2022
Building Heritage	BH1	Undertake condition survey by professional qualified building surveyor or engineer to record the existing condition of the built heritage resources.	✓	✓	✓
	BH2	Carry out vibration and settlement monitoring to built heritage resources. A maximum vibration level 7.5mm/s shall be adopted for the Grade 3 Hung Shing Temple and settlement check points in the Alert/Alarm/Action limit levels at 6mm/8mm/10mm shall be adopted.	✓	✓	✓
	BH3	Are protective covering or protective screen provided to built heritage resources which are close to building area? (c.f. BH3)	N/A	N/A	N/A
	BH4	Maintain public access to the cultural landscape features (c.f. BH4)	N/A	N/A	N/A
	BH5	Provision of at least 1m buffer zone from the proposed works provided? (c.f. BH5)	N/A	N/A	N/A


Remark

N/A – Not Applicable


✓ – Implemented

Obs. – Observed

Rem. – Reminder

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	F-1
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22

APPENDIX F - METEOROLOGICAL DATA EXTRACTED FROM HONG KONG OBSERVATORY

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	F-2
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

2022/06 Daily Extract of Meteorological Observations from HKO


Day	Mean Pressure (hPa)	Hong Kong Observatory						King's Park		Waglan Island^	
		Air Temperature			Mean Dew Point (deg. C)	Mean Relative Humidity (%)	Mean Amount of Cloud (%)	Total Rainfall (mm)	Total Bright Sunshine (hours)	Prevailing Wind Direction (degrees)	Mean Wind Speed (km/h)
		Absolute Daily Max (deg. C)	Mean (deg. C)	Absolute Daily Min (deg. C)							
01	1007.1	30.9	28.7	27.0	25.0	81	88	1.2	2.1	200	17.7
02	1006.2	31.0	28.8	26.0	24.9	80	85	11.9	4.2	210	23.9
03	1005.6	31.2	29.2	28.0	25.5	81	86	1.6	1.1	200	29.8
04	1005.8	32.0	29.6	28.6	25.3	78	87	Trace	6.3	220	33.3
05	1004.7	32.0	29.6	28.7	25.3	78	87	Trace	6.5	220	32.5
06	1003.6	30.6	28.9	27.6	25.7	83	88	2.5	1.8	230	27.0
07	1004.5	29.6	27.4	24.6	24.8	86	86	33.8	0.5	240	20.8
08	1005.6	28.0	25.8	24.7	24.6	93	86	66.0	0.0	100	17.8
09	1005.5	27.9	26.3	25.0	24.6	90	88	28.7	0.5	230	16.3
10	1005.4	27.3	26.1	25.0	24.6	92	88	25.8	0.0	230	18.3
11	1006.6	29.1	26.8	25.3	24.9	89	88	47.5	0.2	190	17.4
12	1007.0	30.3	28.4	25.6	25.4	84	88	2.6	1.6	220	27.5
13	1006.4	30.6	28.9	28.1	25.2	80	87	0.0	2.7	230	30.6
14	1007.0	29.3	27.4	24.8	24.9	87	88	42.8	0.0	230	24.8
15	1009.2	30.5	26.7	24.0	24.5	88	88	11.0	1.4	280	8.0
16	1008.9	30.5	27.6	24.3	24.6	84	88	2.6	1.5	220	15.5
17	1007.6	31.0	29.0	28.0	24.9	79	88	1.0	4.5	220	26.3
18	1006.8	29.8	28.8	27.5	25.2	81	88	1.3	0.3	200	27.3
19	1006.1	30.9	29.3	28.0	25.6	81	88	0.1	2.3	190	28.0
20	1004.8	30.4	29.2	27.6	25.4	80	88	2.8	1.0	200	29.5
21	1005.9	30.5	29.4	28.6	25.4	80	88	Trace	0.4	190	23.7
22	1009.6	31.8	29.5	28.1	25.1	78	85	0.0	4.3	180	14.7
23	1010.4	33.8	30.0	27.9	24.7	74	55	0.0	10.7	170	12.4
24	1008.6	33.4	30.0	27.8	24.3	73	63	0.0	11.6	220	10.7
25	1007.8	32.8	29.6	27.7	24.4	74	70	0.0	11.6	240	15.0
26	1009.3	33.9	30.0	26.8	24.7	74	70	0.3	10.6	190	11.9
27	1008.1	33.4	30.1	27.8	24.6	73	73	0.1	9.2	210	11.6
28	1005.1	34.4	30.6	28.2	24.7	71	59	0.0	11.8	150	7.8
29	1002.8	33.9	30.2	28.1	25.9	78	82	0.7	7.1	070	21.4
30	1002.7	29.6	27.5	25.9	25.5	89	89	64.9	0.3	080	31.9
Mean/Total	1006.5	31.0	28.6	26.8	25.0	81	83	349.2	116.1	220	21.1
Climatological Normal?	1006.1	30.7	28.3	26.5	24.9	82	77	491.5	144.3	220	21.6

^ Information of wind direction and wind speed for Waglan Island are based on automatic weather station data since August 1989

Trace means rainfall less than 0.05 mm

? 1991-2020 Climatological Normal, unless otherwise specified

Source: [Daily Extract](#) | [Hong Kong Observatory\(HKO\)](#) | [Climate Information Service](#)

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	F-3
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

2022/07 Daily Extract of Meteorological Observations from HKO


Day	Hong Kong Observatory							King's Park		Waglan Island^	
	Mean Pressure (hPa)	Air Temperature			Mean Dew Point (deg. C)	Mean Relative Humidity (%)	Mean Amount of Cloud (%)	Total Rainfall (mm)	Total Bright Sunshine (hours)	Prevailing Wind Direction (degrees)	Mean Wind Speed (km/h)
		Absolute Daily Max (deg. C)	Mean (deg. C)	Absolute Daily Min (deg. C)							
01	1000.7	29.7	27.2	25.4	24.5	85	88	63.0	2.5	080	59.3
02	999.1	28.4	26.9	25.6	24.9	89	90	72.4	0.2	110	57.8
03	1001.5	30.3	29.0	28.2	25.6	82	88	0.0	1.0	180	47.9
04	1002.2	29.4	28.8	27.9	25.6	83	88	0.4	0.0	200	44.8
05	1004.2	29.7	29.0	28.4	25.6	82	88	0.2	0.1	200	34.8
06	1005.7	30.3	28.8	28.0	25.0	81	88	0.5	0.6	220	22.5
07	1007.3	31.6	28.7	27.2	26.1	86	87	13.1	1.8	140	19.6
08	1007.4	33.8	30.0	27.7	25.8	79	70	Trace	10.8	090	17.0
09	1005.7	33.3	29.9	28.6	26.2	81	75	Trace	4.8	090	23.8
10	1006.5	34.2	30.5	28.6	26.0	77	58	Trace	11.3	100	13.7
11	1007.3	35.1	30.9	28.5	25.4	73	30	0.0	11.6	090	9.2
12	1006.9	35.2	31.1	28.6	25.2	72	22	0.0	11.2	110	10.2
13	1005.9	35.2	31.0	28.4	24.8	71	32	0.0	10.7	130	11.9
14	1005.6	33.1	30.4	28.5	25.2	75	76	0.0	7.8	190	11.3
15	1006.5	34.3	30.4	28.6	25.7	77	85	0.2	7.1	230	16.2
16	1006.0	33.3	30.5	28.8	26.0	77	81	1.5	7.7	230	31.3
17	1005.7	32.6	30.5	28.8	25.8	76	85	1.2	8.9	230	33.1
18	1004.9	32.7	30.4	28.5	26.0	78	88	2.7	6.4	220	25.5
19	1006.6	33.7	30.8	29.1	25.9	75	88	Trace	7.8	190	19.5
20	1009.8	34.2	30.8	29.2	26.1	76	69	0.6	7.0	130	22.0
21	1012.0	35.2	30.9	28.1	25.7	74	41	0.3	9.7	150	12.9
22	1010.8	35.6	31.2	28.2	25.2	72	14	0.0	12.2	240	11.7
23	1008.7	34.9	31.4	29.2	26.1	74	20	0.0	11.5	240	18.7
24	1007.1	36.1	32.0	29.5	26.0	72	22	0.0	11.8	240	18.3
25	1007.6	35.8	32.0	29.9	26.6	74	31	0.0	10.5	230	15.9
26	1007.7	35.2	31.2	29.1	25.1	71	35	0.0	10.4	210	12.8
27	1007.1	34.2	31.0	29.0	24.5	69	27	0.0	10.6	230	16.9
28	1006.2	35.3	31.2	28.8	25.7	73	26	0.0	10.6	250	17.3
29	1004.7	35.3	31.7	29.7	26.4	74	57	0.0	8.6	260	14.9
30	1004.3	31.2	29.5	26.5	25.9	81	85	2.4	0.6	220	8.8
31	1004.3	34.0	30.8	28.3	25.8	76	47	0.0	10.4	230	16.0
Mean/Total	1006.0	33.3	30.3	28.4	25.6	77	61	158.5	226.2	230	22.4
Climatological Normal?	1005.6	31.6	28.9	26.9	25.2	81	72	385.8	197.3	230	21.3

[^] Information of wind direction and wind speed for Waglan Island are based on automatic weather station data since August 1989

Trace means rainfall less than 0.05 mm

? 1991-2020 Climatological Normal, unless otherwise specified

Source: [Daily Extract | Hong Kong Observatory\(HKO\) | Climate Information Service](#)

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	F-4
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22

2022/08 Daily Extract of Meteorological Observations from HKO

Day	Hong Kong Observatory							King's Park		Waglan Island^	
	Mean Pressure (hPa)	Air Temperature			Mean Dew Point (deg. C)	Mean Relative Humidity (%)	Mean Amount of Cloud (%)	Total Rainfall (mm)	Total Bright Sunshine (hours)	Prevailing Wind Direction (degrees)	Mean Wind Speed (km/h)
		Absolute Daily Max (deg. C)	Mean (deg. C)	Absolute Daily Min (deg. C)							
01	1005.9	35.7	31.4	29.1	25.0	69	47	0.0	11.5	***	***
02	1007.1	35.2	31.1	28.0	24.9	70	63	0.2	10.3	***	***
03	1006.7	30.8	28.2	25.6	24.7	82	85	34.9	0.8	***	***
04	1004.5	28.4	27.1	25.9	24.6	86	83	14.9	0.2	***	***
05	1007.6	28.6	26.1	24.5	25.1	94	89	165.5	1.3	***	***
06	1007.6	30.9	27.9	26.1	25.9	89	81	5.5	5.3	***	***
07	1006.7	32.6	29.6	27.6	26.1	82	71	2.8	9.0	***	***
08	1006.3	30.9	28.3	26.2	25.8	87	86	33.3	1.9	***	***
09	1003.6	28.5	26.7	25.4	24.5	88	88	72.0	0.3	***	***
10	1004.1	29.6	27.4	25.8	25.6	90	90	49.7	0.9	***	***
11	1007.8	28.8	26.7	25.5	25.0	90	88	12.4	1.2	***	***
12	1008.8	27.1	26.1	24.9	24.8	93	84	76.0	0.1	***	***
13	1008.0	32.6	28.7	25.8	25.1	81	57	0.0	5.3	***	***
14	1007.2	33.3	29.5	26.9	25.1	78	27	0.0	10.0	***	***
15	1006.2	33.6	30.0	28.1	25.6	78	57	0.0	7.6	***	***
16	1005.6	33.2	29.4	26.2	25.9	82	72	9.1	6.5	***	***
17	1005.8	32.3	28.2	26.2	25.6	86	84	29.8	4.1	***	***
18	1005.5	30.4	28.1	26.2	25.6	87	84	22.1	1.8	***	***
19	1004.9	32.0	28.3	26.4	25.5	85	87	4.8	3.5	***	***
20	1007.5	31.9	28.2	26.5	25.0	83	74	8.4	6.2	***	***
21	1008.3	32.9	29.0	26.6	25.9	84	71	1.9	5.9	***	***
22	1006.9	32.9	30.1	28.2	25.5	77	41	0.0	10.6	***	***
23	1005.0	34.5	31.1	28.6	26.4	77	28	0.0	10.1	***	***
24	1002.3	34.9	30.8	26.4	25.2	73	69	5.5	6.3	***	***
25	1006.3	29.8	27.2	25.0	24.4	85	87	48.1	1.8	***	***
26	1010.6	32.9	29.4	27.5	25.6	80	66	0.1	7.7	***	***
27	1009.2	33.0	29.7	27.4	25.4	78	60	0.0	10.8	***	***
28	1008.4	34.4	30.5	28.3	26.7	80	57	0.0	10.9	***	***
29	1010.2	34.6	30.1	28.6	25.9	78	81	0.0	3.2	***	***
30	1008.8	32.3	29.5	27.9	25.7	80	65	13.1	6.6	***	***
31	1006.7	31.7	29.7	28.1	25.8	80	70	4.7	6.0	***	***
Mean/Total	1006.8	31.9	28.8	26.8	25.4	82	71	614.8	167.7	***	***
Climatological Normal?	1005.2	31.3	28.7	26.7	25.1	81	70	453.2	182.1	230	18.8


*** unavailable

^ Information of wind direction and wind speed for Waglan Island are based on automatic weather station data since August 1989


Trace means rainfall less than 0.05 mm

? 1991-2020 Climatological Normal, unless otherwise specified

Source: [Daily Extract | Hong Kong Observatory\(HKO\) | Climate Information Service](#)


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	G-1
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22

APPENDIX G - GRAPHICAL PLOTS OF THE MONITORING RESULT


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-2
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

AMS1N – 1-hour and 24-hour TSP monitoring


Date	Weather	1-hour TSP Monitoring	24-hour TSP monitoring
		Average Concentration (µg/m3)	Average Concentration (µg/m3)
02/06/2022	Fine	82.3	82.0
08/06/2022	Rainy	113.0	113.0
14/06/2022	Cloudy	45.0	45.0
20/06/2022	Fine	30.7	31.0
25/06/2022	Fine	51.0	51.0
30/06/2022	Fine	31.7	32.0

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-3
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


Date	Weather	1-hour TSP Monitoring	24-hour TSP monitoring
		Average Concentration (µg/m3)	Average Concentration (µg/m3)
06/07/2022	Fine	31.3	31.0
12/07/2022	Fine	33.3	33.0
18/07/2022	Fine	29.7	30.0
22/07/2022	Fine	55.3	55.0
28/07/2022	Fine	38.3	38.0


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-4
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

Date	Weather	1-hour TSP Monitoring	24-hour TSP Monitoring
		Average Concentration (µg/m3)	Average Concentration (µg/m3)
03/08/2022	Cloudy	104	77
09/08/2022	Fine	30	24
15/08/2022	Fine	30	26
19/08/2022	Fine	17	13
26/08/2022	Fine	66	38
31/08/2022	Fine	88	65
Average:		51.6	46.1
Action Level:		319	153
Limit Level:		500	260


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-5
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


AMS1N- 1 – hour TSP Monitoring

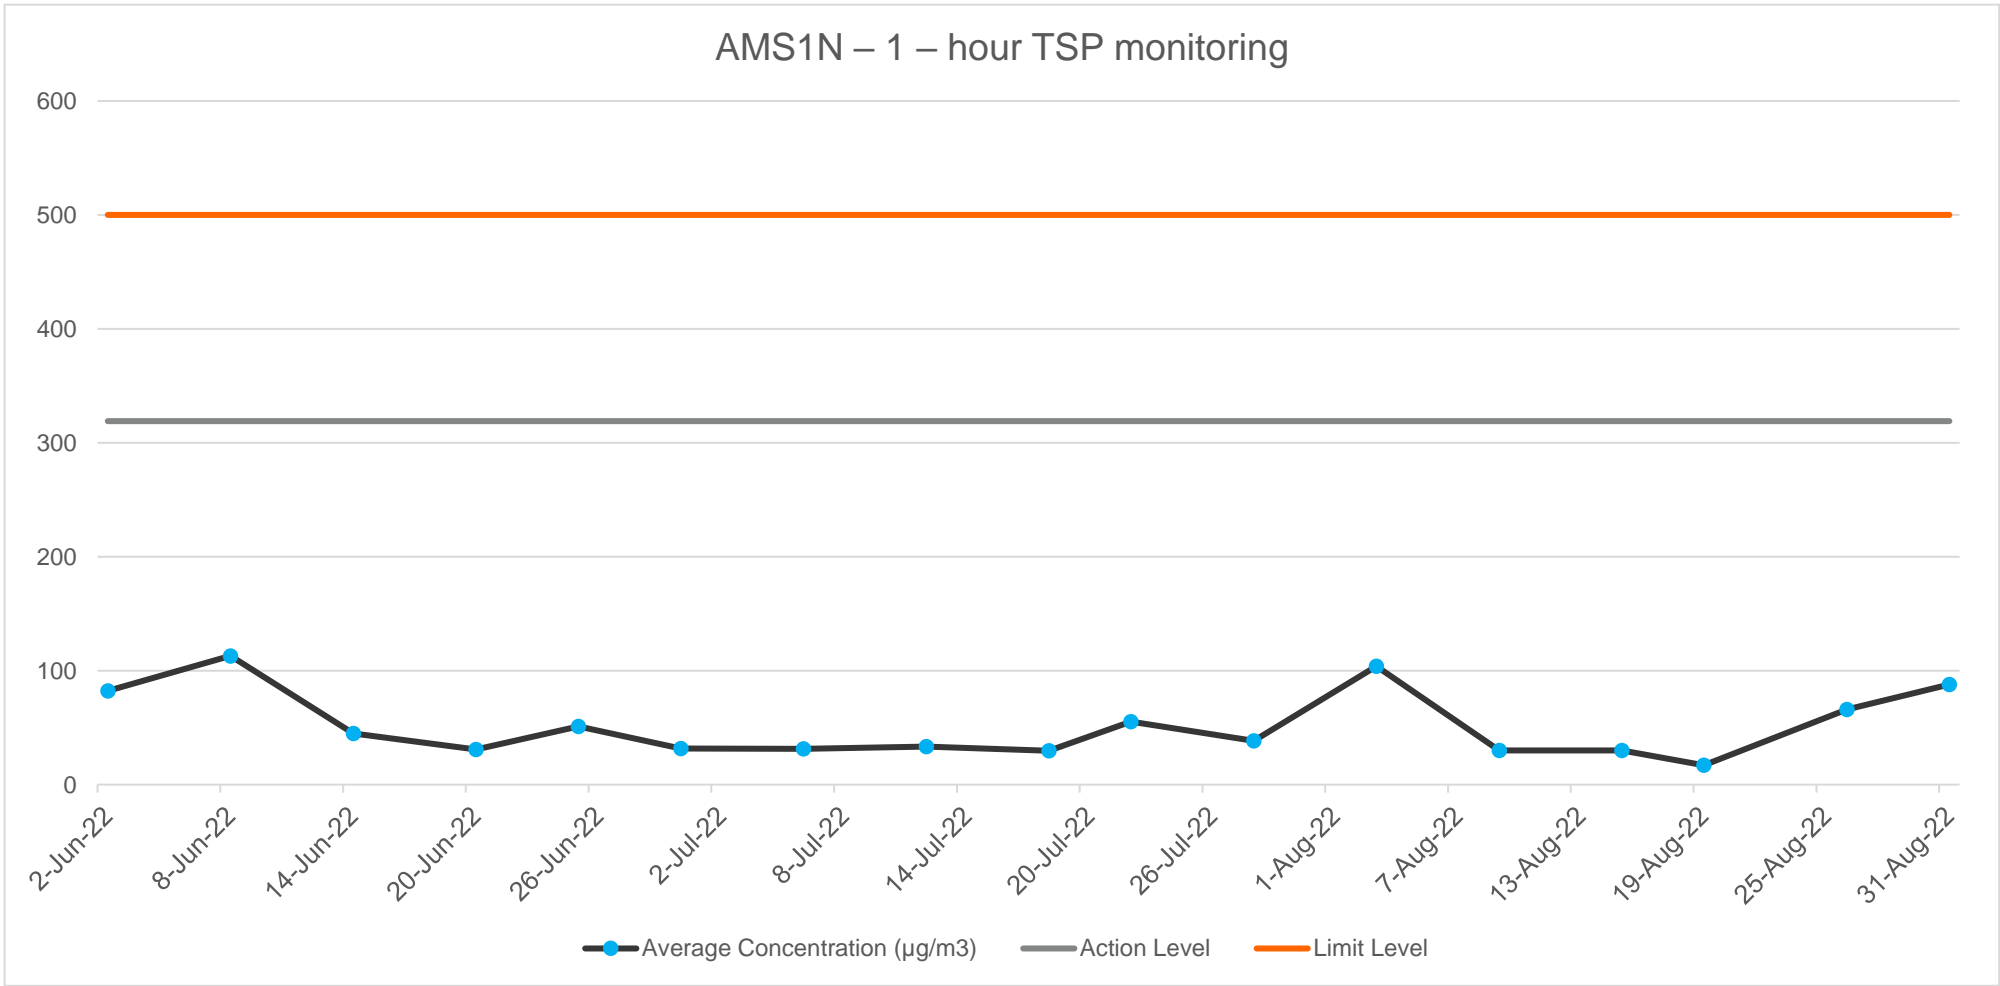

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-6
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


AMS1N- 24- hour TSP Monitoring

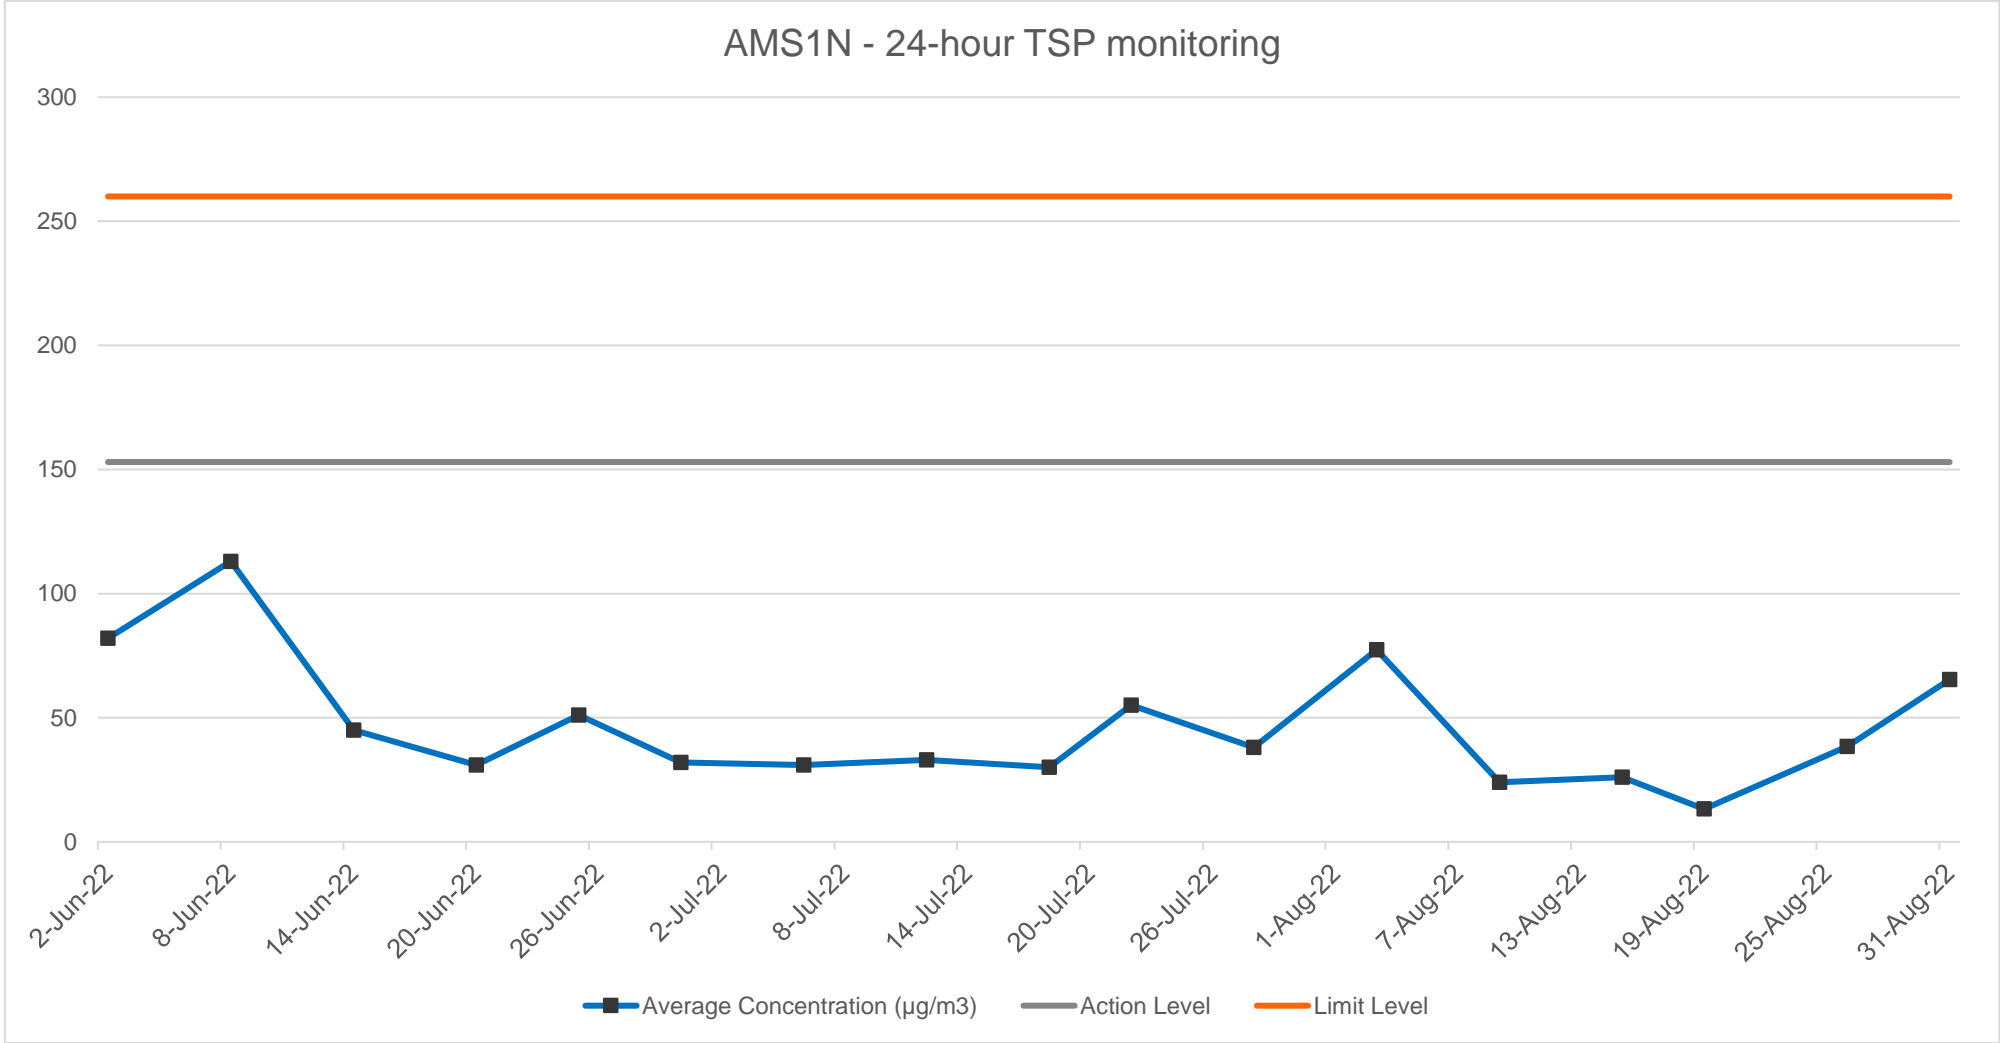


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-7
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

AMS2N1 – 1- hour and 24-hour TSP Monitoring


Date	Weather	1-hour TSP Monitoring	24-hour TSP monitoring
		Average Concentration (µg/m3)	Average Concentration (µg/m3)
02/06/2022	Fine	85.3	85.0
08/06/2022	Rainy	103.0	103.0
14/06/2022	Cloudy	60.0	40.0
20/06/2022	Fine	26.0	26.0
25/06/2022	Fine	45.6	46.0
30/06/2022	Fine	54.0	54.0

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-8
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


Date	Weather	1-hour TSP Monitoring	24-hour TSP monitoring
		Average Concentration (µg/m3)	Average Concentration (µg/m3)
06/07/2022	Fine	54.0	54.0
12/07/2022	Fine	38.7	38.0
18/07/2022	Fine	34.0	34.0
22/07/2022	Fine	45.7	46.0
28/07/2022	Fine	37.0	37.0


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-9
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

Date	Weather	1-hour TSP Monitoring	24-hour TSP Monitoring
		Average Concentration (µg/m3)	Average Concentration (µg/m3)
03/08/2022	Cloudy	172	85
09/08/2022	Fine	34	16
15/08/2022	Fine	27	19
19/08/2022	Fine	16	14
26/08/2022	Fine	52	39
31/08/2022	Fine	94	50
	Average:	57.5	46.2
	Action Level:	279	179
	Limit Level:	500	260


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-10
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


AMS2N- 1 – hour TSP Monitoring

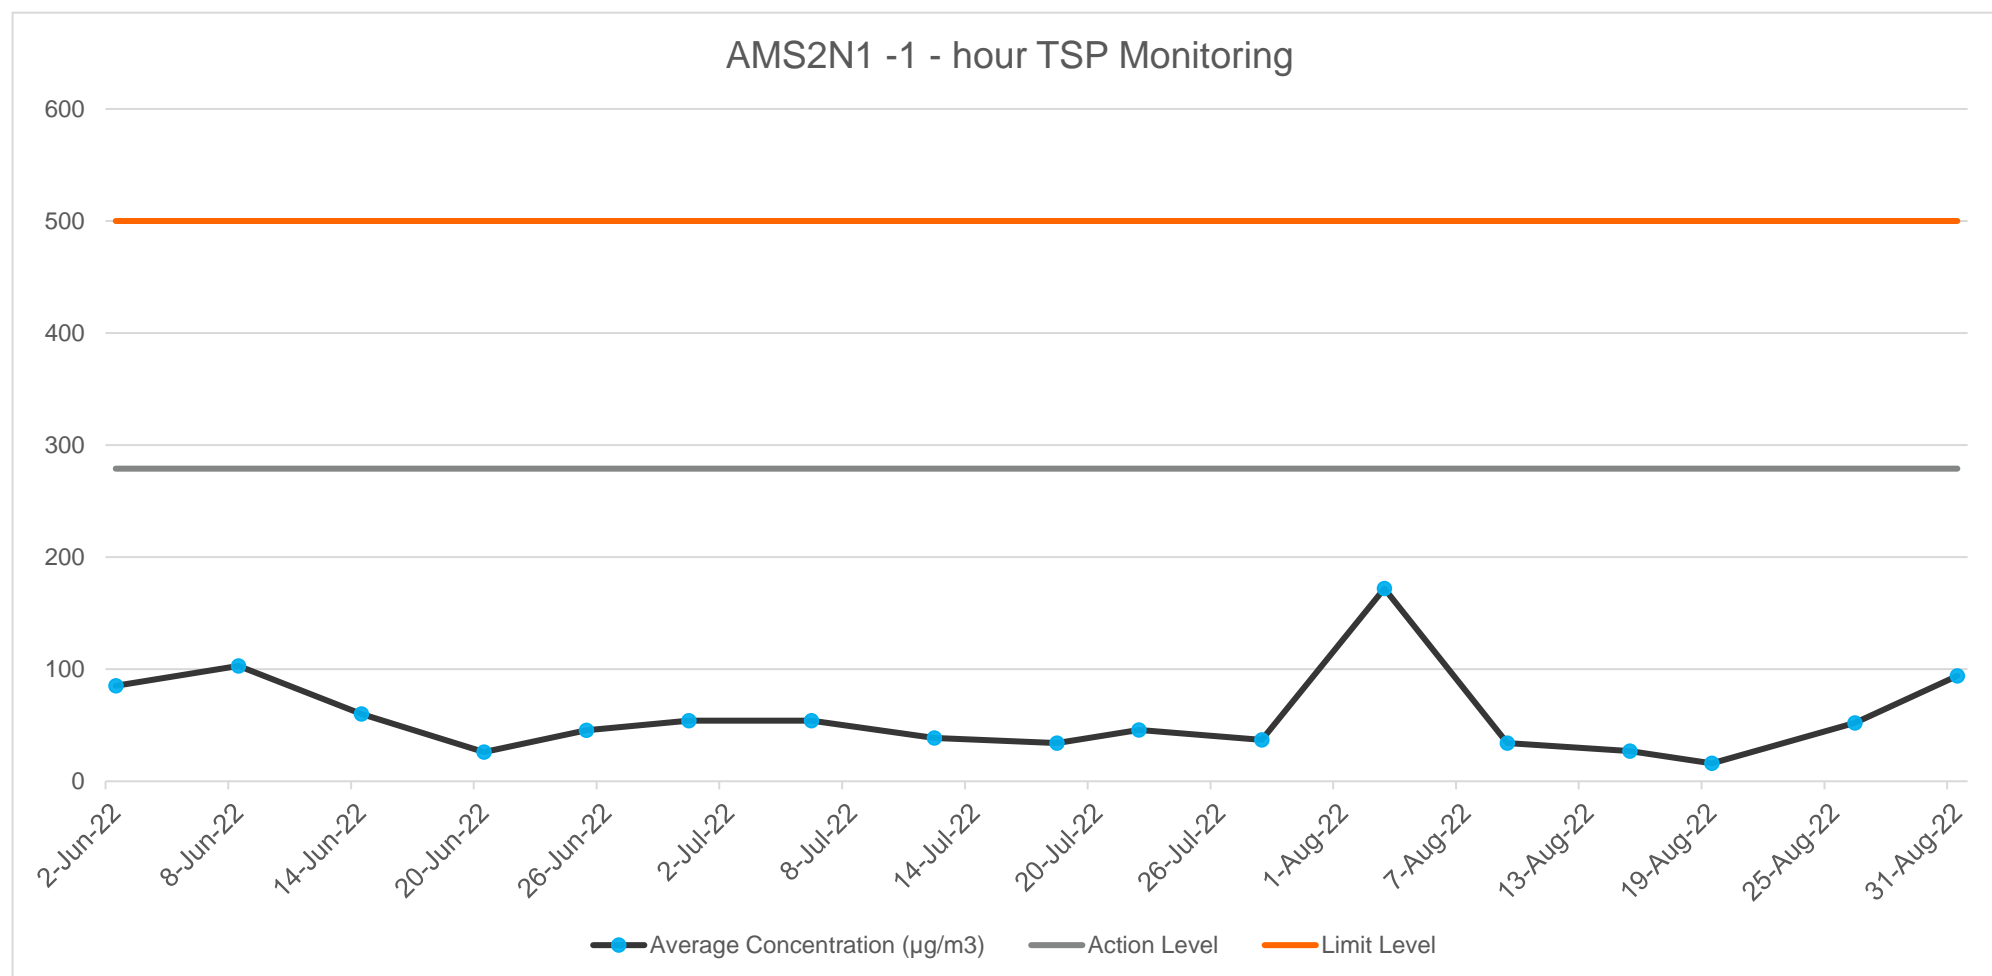

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-11
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


AMS2N1- 24 – hour TSP Monitoring

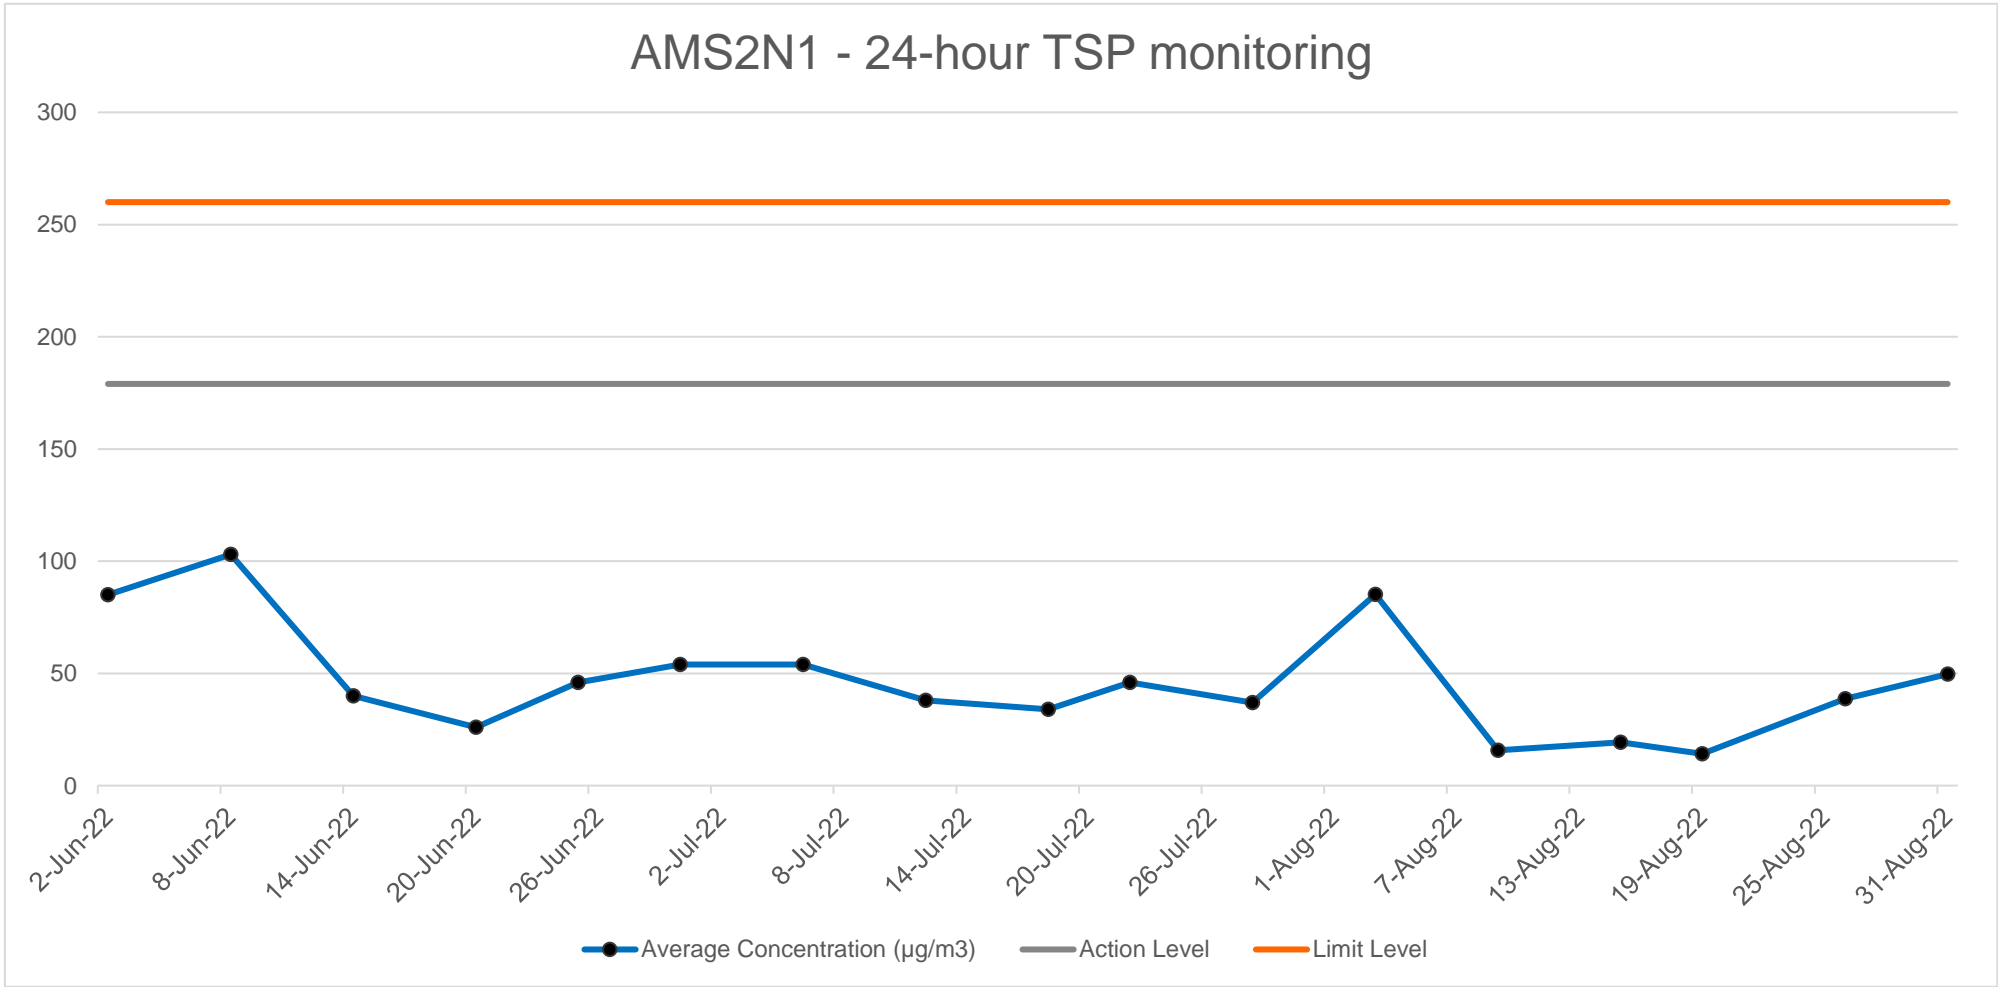


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-12
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

AMS3N – 1- hour and 24-hour TSP Monitoring


Date	Weather	1-hour TSP Monitoring	24-hour TSP monitoring
		Average Concentration (µg/m3)	Average Concentration (µg/m3)
02/06/2022	Fine	61.3	61.0
08/06/2022	Rainy	123.6	124.0
14/06/2022	Cloudy	41.3	41.0
20/06/2022	Fine	27.0	27.0
25/06/2022	Fine	37.3	37.0
30/06/2022	Fine	31.6	32.0

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-13
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


Date	Weather	1-hour TSP Monitoring	24-hour TSP monitoring
		Average Concentration (µg/m3)	Average Concentration (µg/m3)
06/07/2022	Fine	36.3	36.0
12/07/2022	Fine	37.0	37.0
18/07/2022	Fine	32.7	33.0
22/07/2022	Fine	57.7	58.0
28/07/2022	Fine	33.3	33.0


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-14
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

Date	Weather	1-hour TSP Monitoring	24-hour TSP Monitoring
		Average Concentration (µg/m3)	Average Concentration (µg/m3)
03/08/2022	Cloudy	33	22
09/08/2022	Fine	40	25
15/08/2022	Fine	29	23
19/08/2022	Fine	19	11
26/08/2022	Fine	60	43
31/08/2022	Fine	85	52
	Average:	46.2	40.9
	Action Level:	158	158
	Limit Level:	500	260


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-15
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


AMS3N- 1 – hour TSP Monitoring

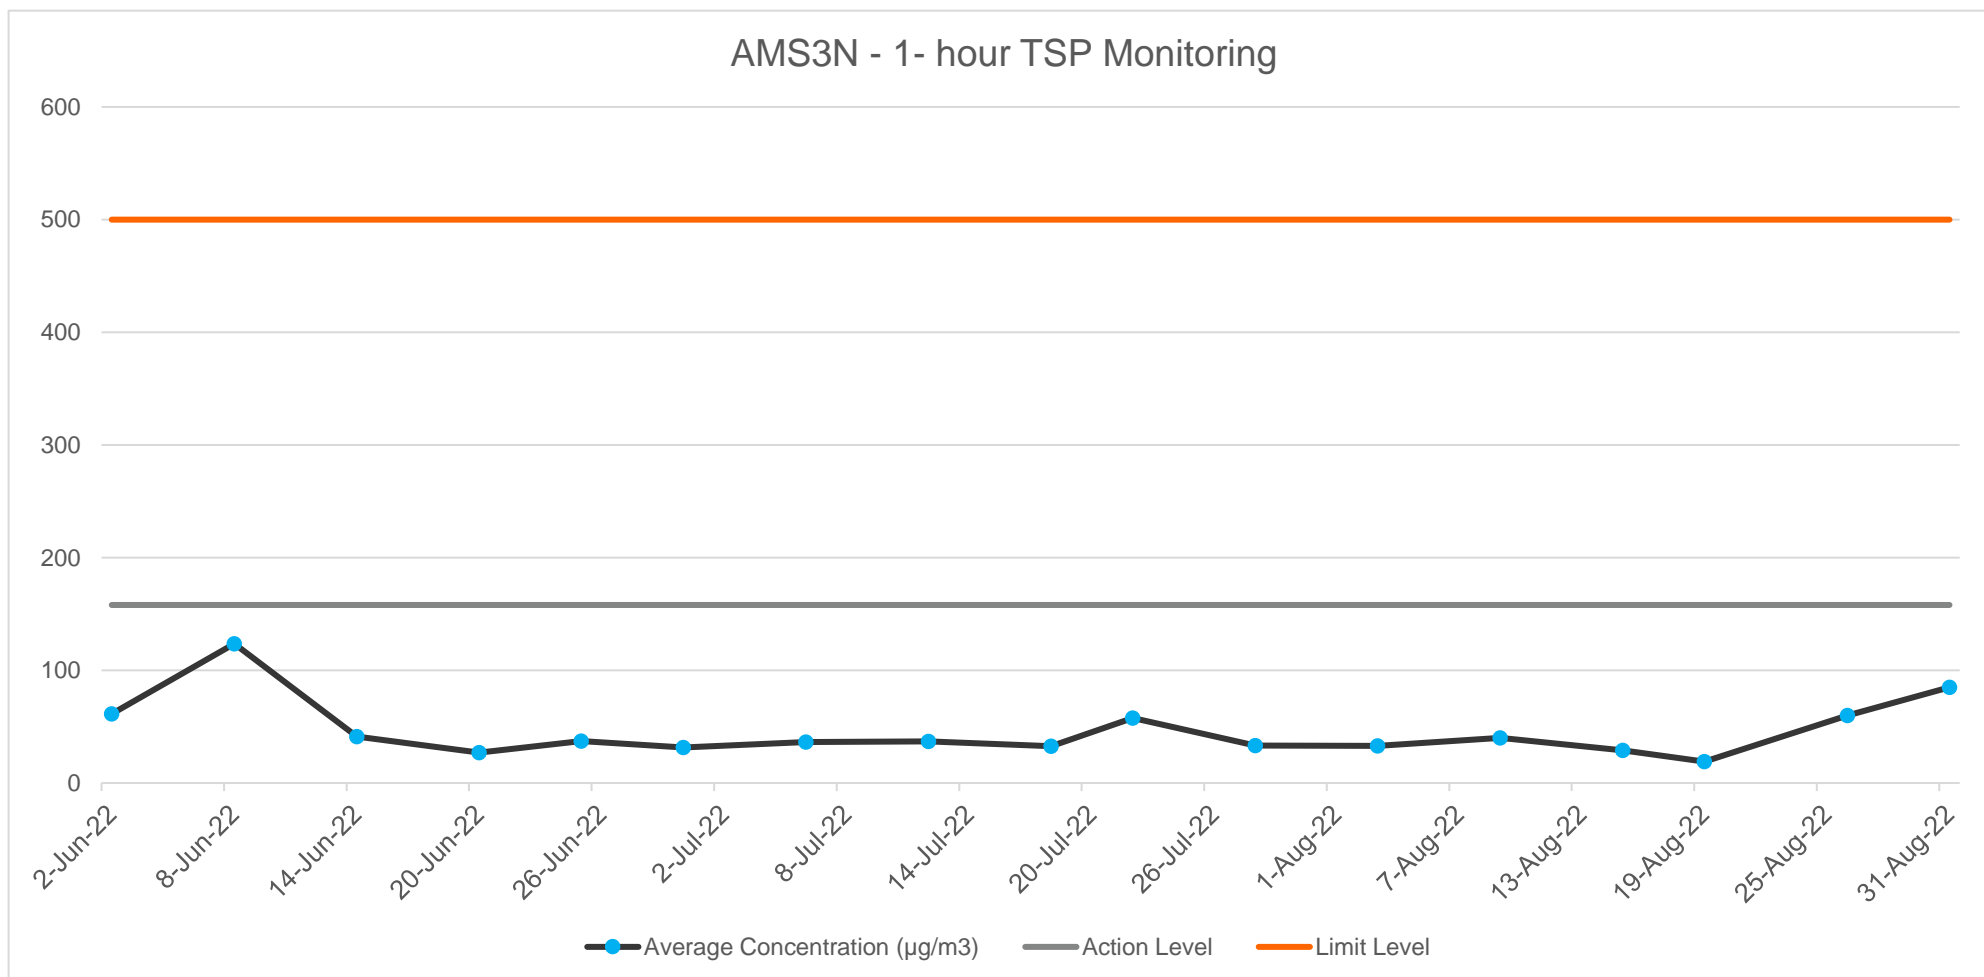

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-16
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


AMS3N – 24-hour TSP Monitoring

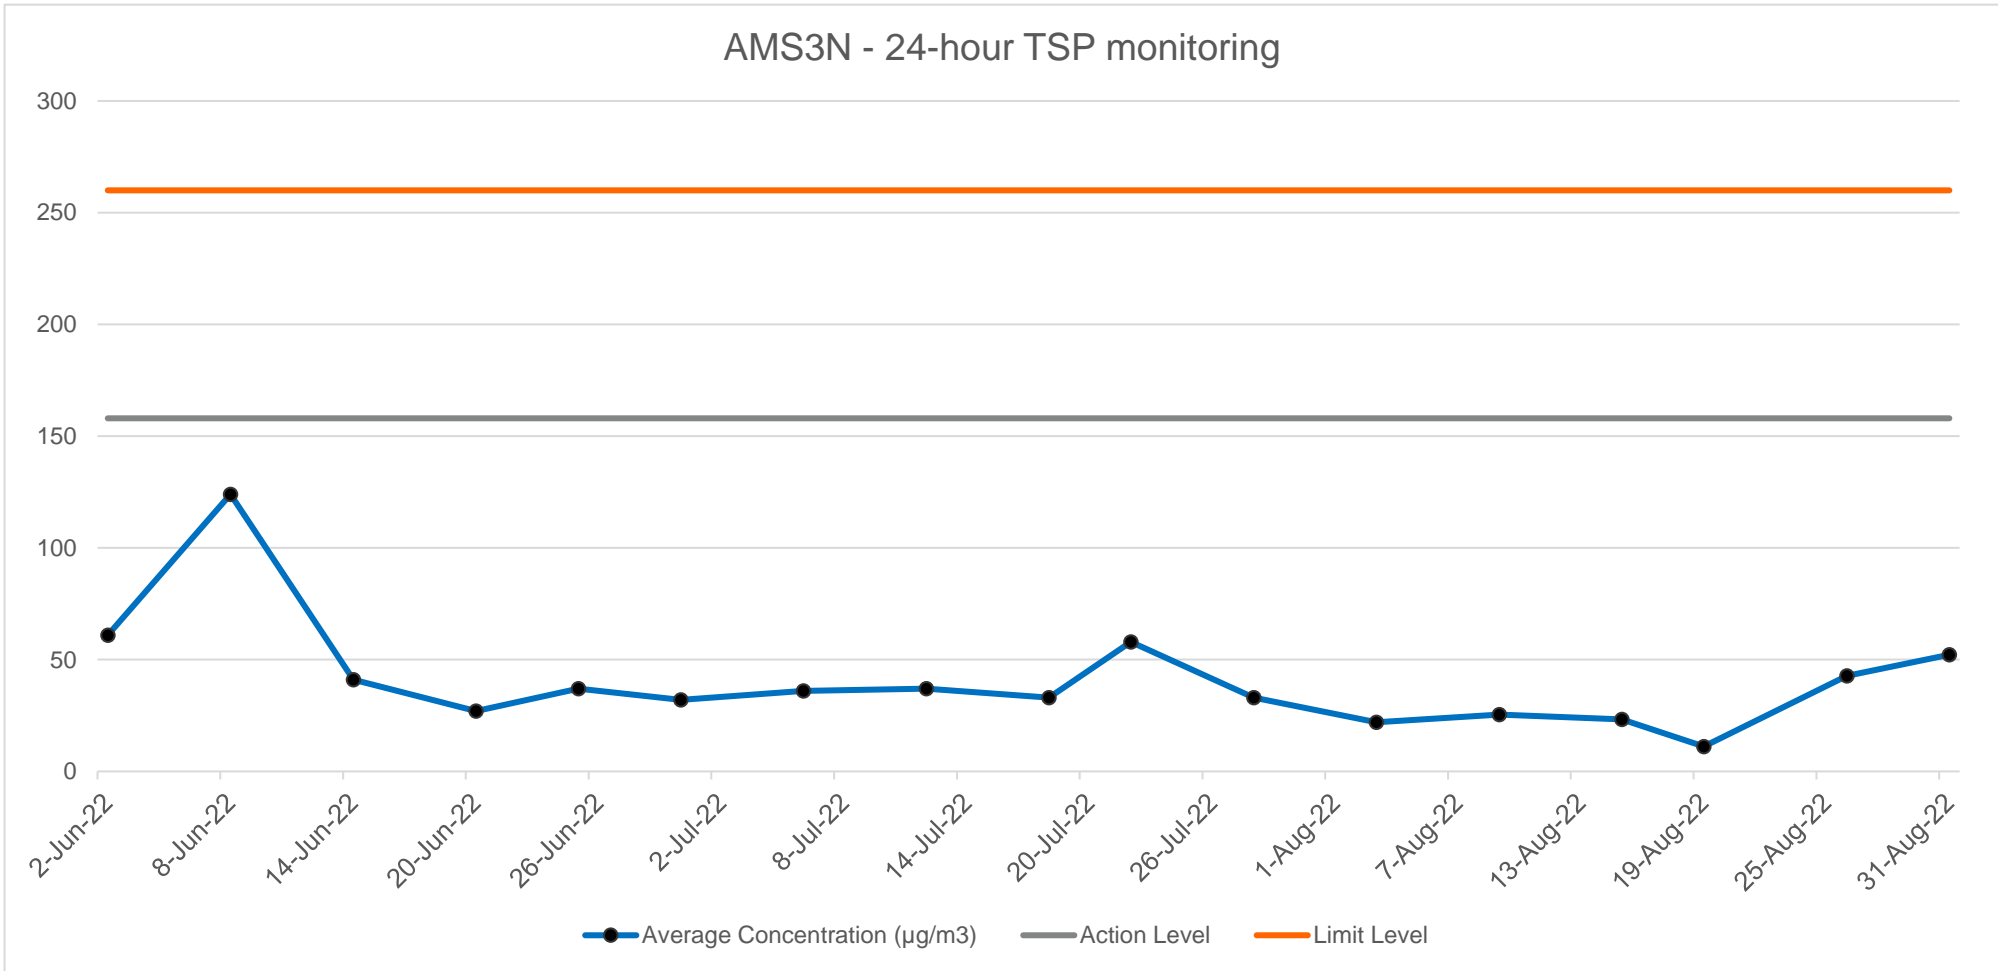


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-17
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

AMS4N — 1- hour and 24-hour TSP Monitoring


Date	Weather	1-hour TSP Monitoring	24-hour TSP monitoring
		Average Concentration (µg/m3)	Average Concentration (µg/m3)
02/06/2022	Fine	106.0	106.0
08/06/2022	Rainy	76.6	77.0
14/06/2022	Cloudy	56.0	56.0
20/06/2022	Fine	27.0	27.0
25/06/2022	Fine	45.3	45.0
30/06/2022	Fine	41.0	41.0

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-18
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


Date	Weather	1-hour TSP Monitoring	24-hour TSP monitoring
		Average Concentration (µg/m3)	Average Concentration (µg/m3)
06/07/2022	Fine	47.7	47.0
12/07/2022	Fine	35.7	35.0
18/07/2022	Fine	29.0	29.0
22/07/2022	Fine	43.3	43.7
28/07/2022	Fine	30.7	30.0


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-19
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

Date	Weather	1-hour TSP Monitoring	24-hour TSP Monitoring
		Average Concentration (µg/m3)	Average Concentration (µg/m3)
03/08/2022	Cloudy	33	26
09/08/2022	Fine	40	24
15/08/2022	Fine	29	16
19/08/2022	Fine	19	13
26/08/2022	Fine	60	34
31/08/2022	Fine	85	48
	Average:	47.3	41
	Action Level:	278	144
	Limit Level:	500	260


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-20
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


AMS4N- 1 – hour TSP Monitoring

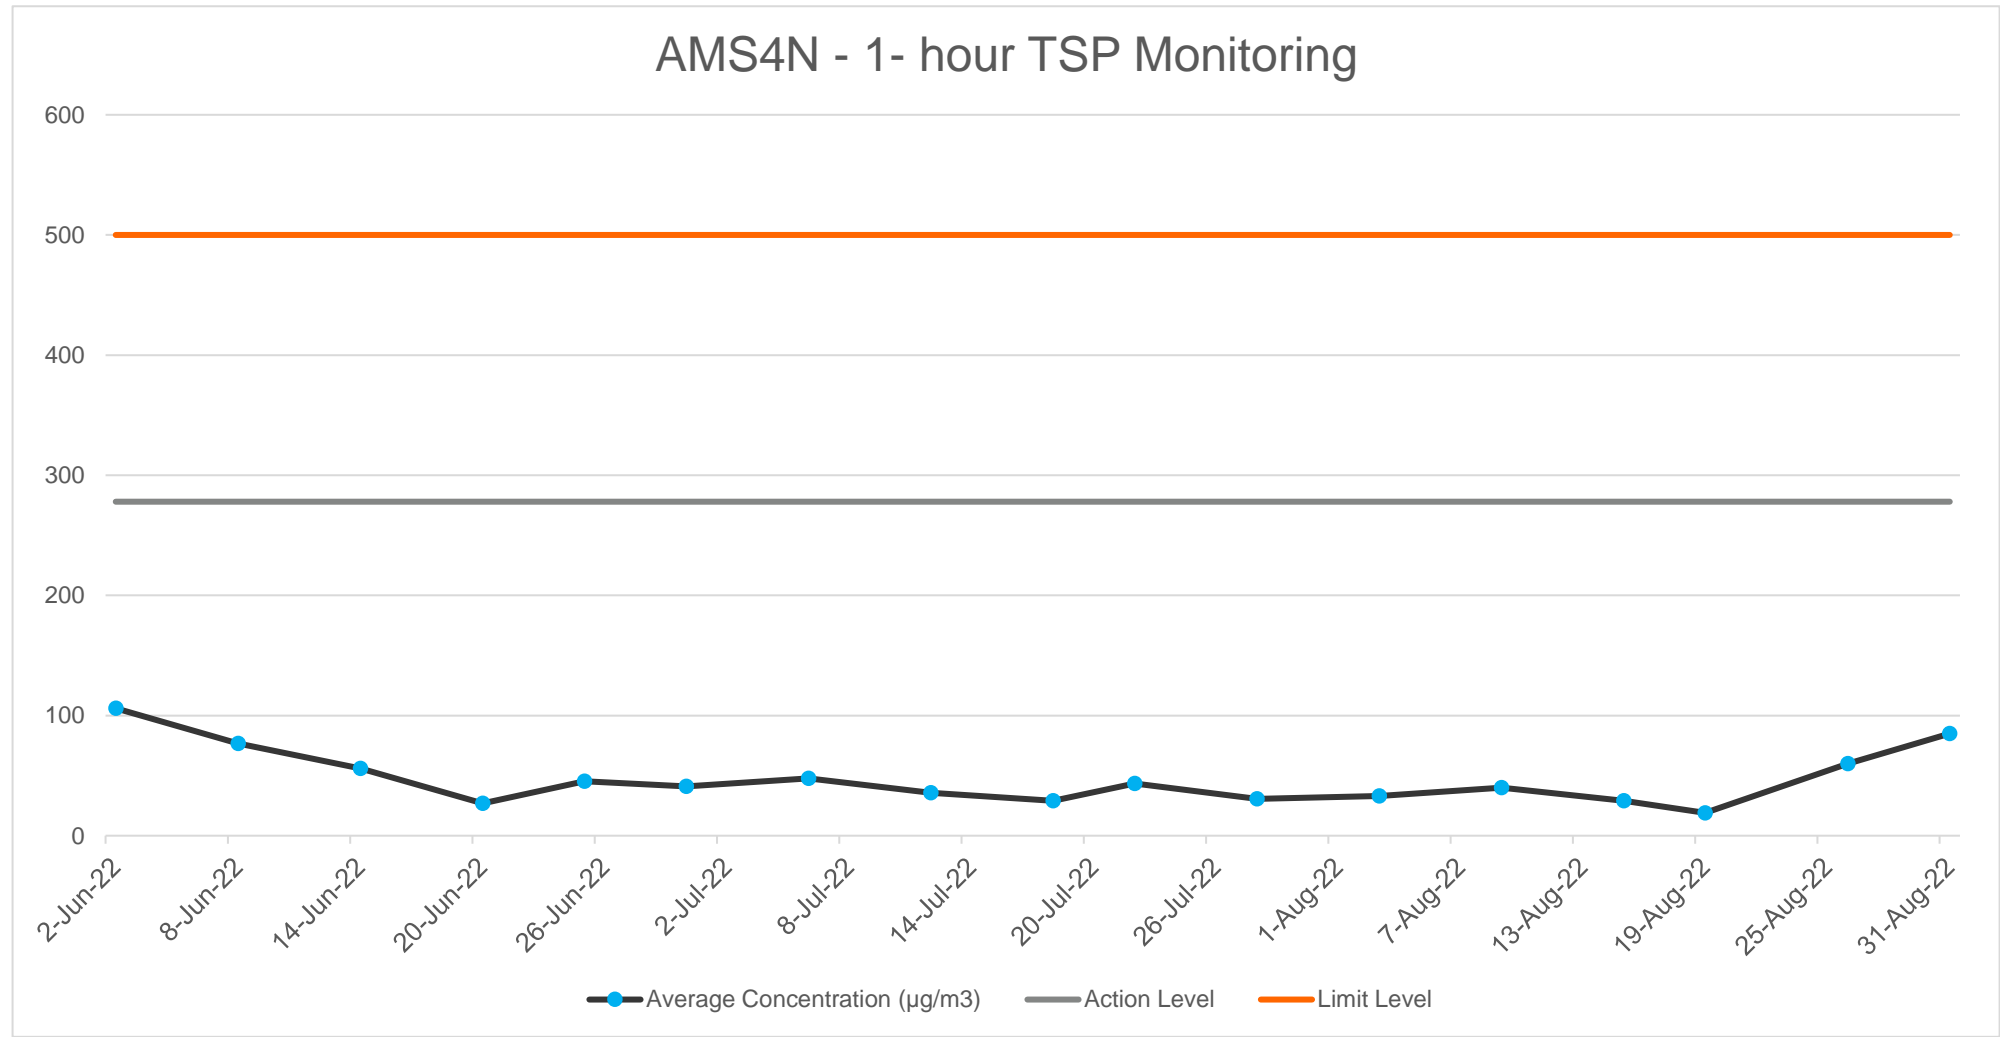

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-21
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


AMS4N- 24 – hour TSP Monitoring

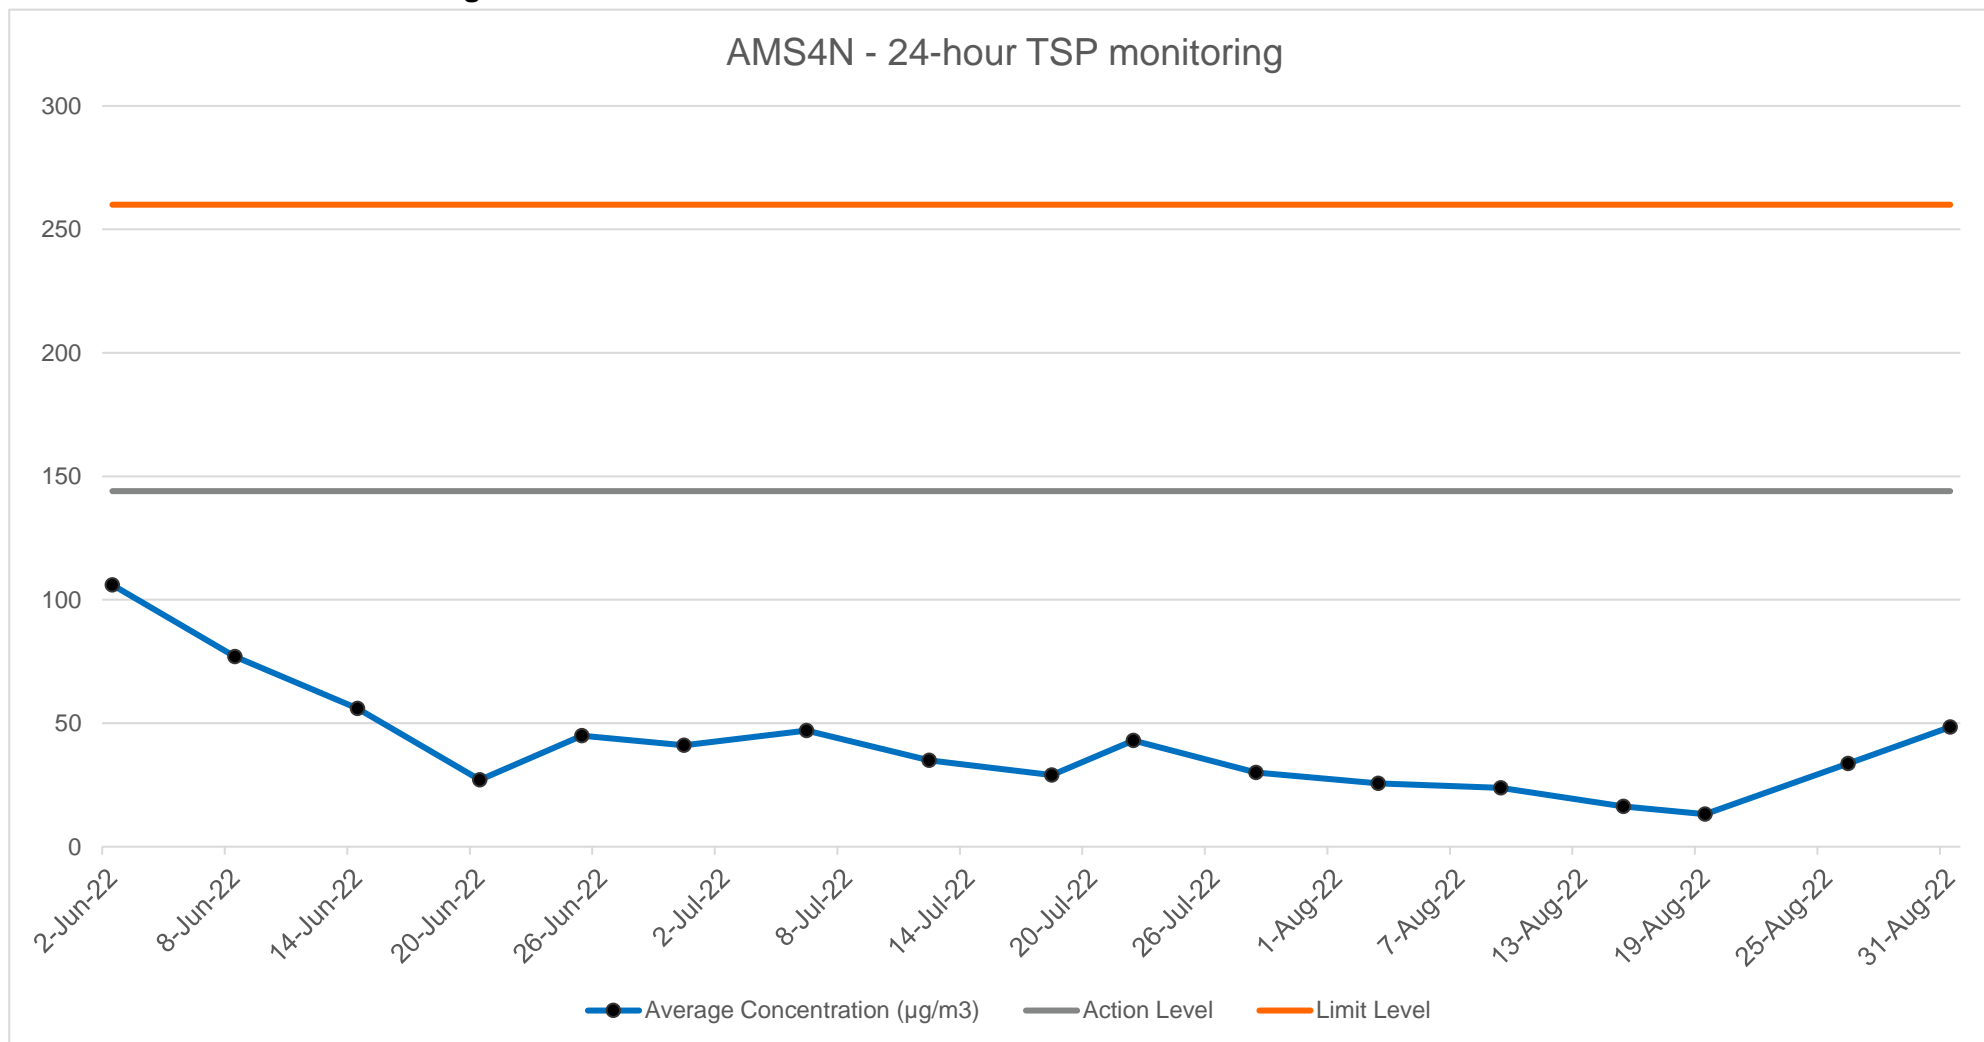


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-22
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


NMS1N – Leq30 Noise monitoring

Start Date & Time	Leq dB(A)	L90 dB(A)	L10 dB(A)	Limit Level:
02/06/2022	58.0	61.1	46.7	75
08/06/2022	59.9	63.0	51.4	75
14/06/2022	57.6	60.0	49.1	75
20/06/2022	56.2	59.2	50.3	75
30/06/2022	56.5	71.6	46.0	75
06/07/2022	65.4	54.5	74.0	75
12/07/2022	63.9	60.4	67.8	75
18/07/2022	66.0	62.8	71.9	75
28/07/2022	67.5	65.1	72.5	75
03/08/2022	54.2	57.4	50.5	75
09/08/2022	68.5	70.4	66.7	75
15/08/2022	71.8	74.5	70.2	75
26/08/2022	67.2	70.7	57.2	75
31/08/2022	68.7	72.1	56.0	75
Action Level:	When one valid documented complaint is received			
Limit Level:	75.0 dB(A)			

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-23
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


NMS1N – Leq30 Noise monitoring

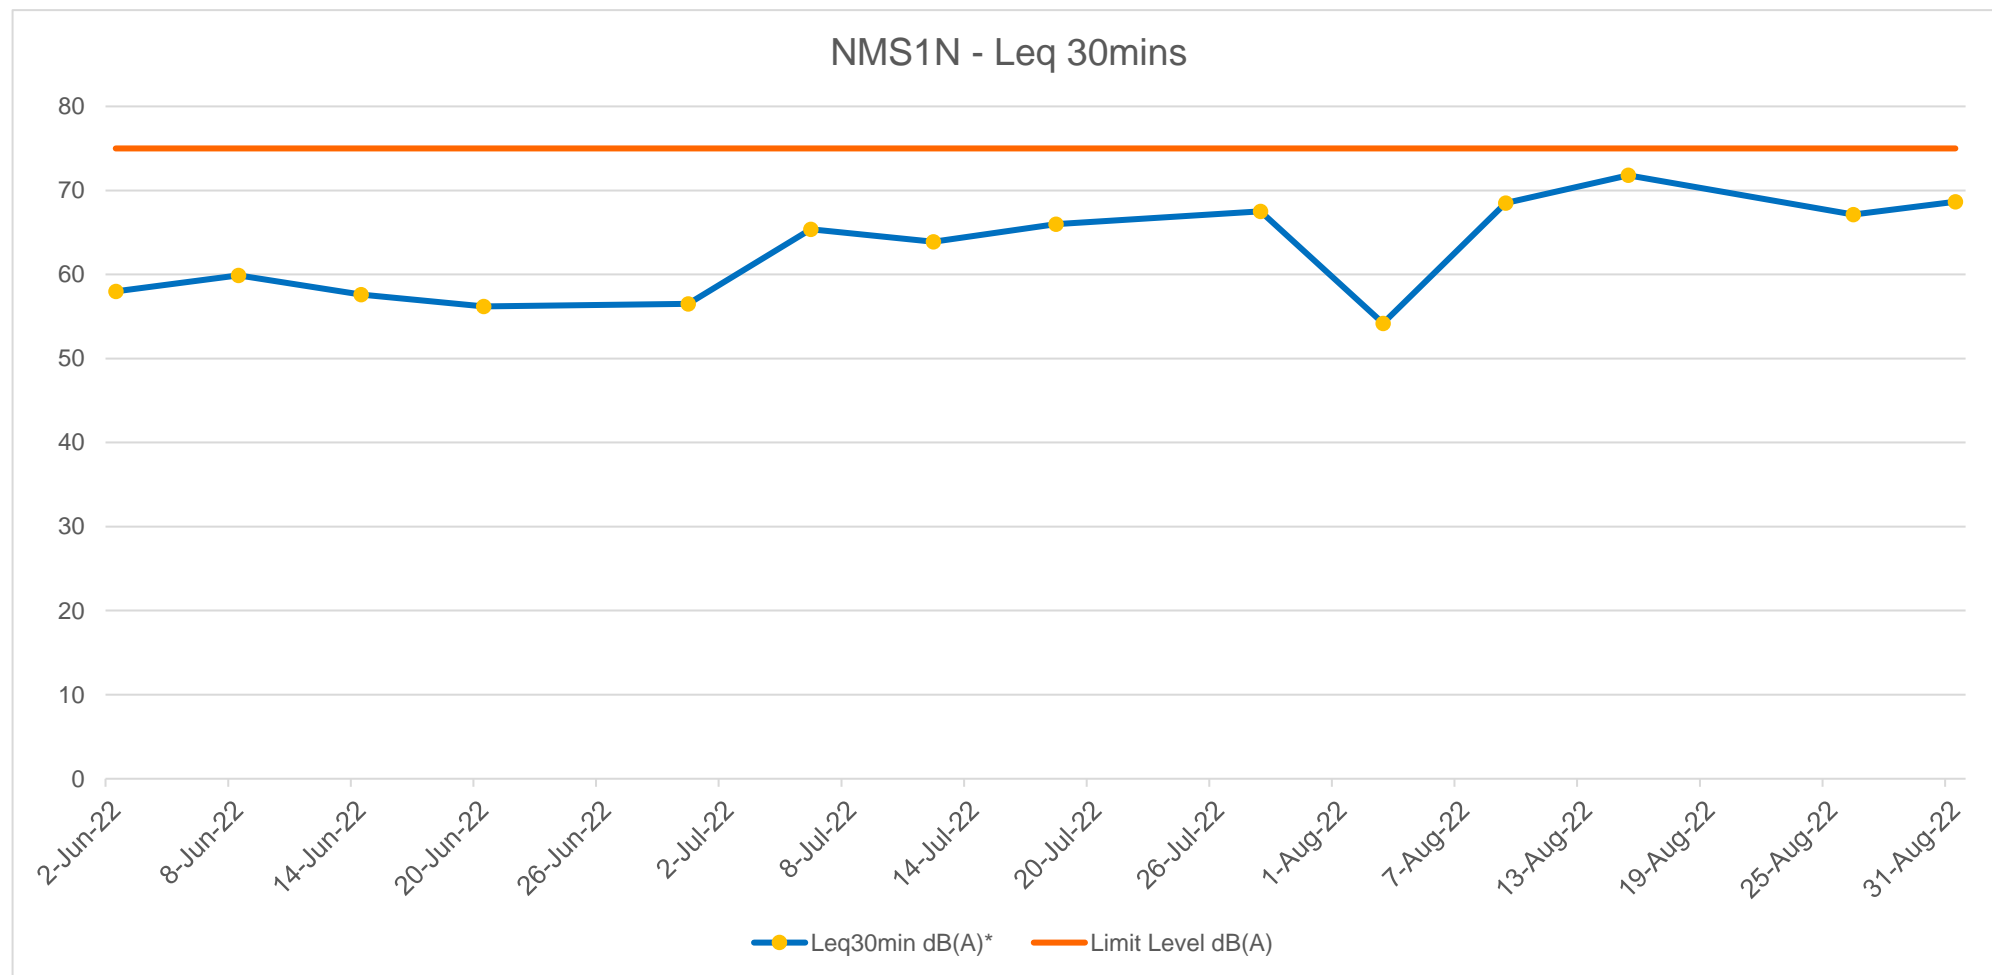


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-24
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


NMS2N1 – Leq30 Noise monitoring

Start Date & Time	Leq dB(A)	L90 dB(A)	L10 dB(A)	Limit Level:
02/06/2022	63.1	65.8	49.2	75
08/06/2022	63.0	67.6	57.7	75
14/06/2022	64.4	66.0	60.0	75
20/06/2022	58.2	61.3	51.9	75
30/06/2022	61.2	63.2	56.1	75
06/07/2022	65.2	58.6	70.6	75
12/07/2022	66.5	61.4	77.1	75
18/07/2022	66.5	62.9	69.8	75
28/07/2022	65.4	62.2	69.2	75
03/08/2022	49.7	50.9	48.4	75
09/08/2022	72.9	74.6	71.2	75
15/08/2022	67.6	69.0	65.8	75
26/08/2022	67.8	69.5	65.5	75
31/08/2022	61.0	65.3	56.1	75
Action Level:	When one valid documented complaint is received			
Limit Level:	75.0 dB(A)			

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-25
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


NMS2N1 – Leq30 Noise monitoring

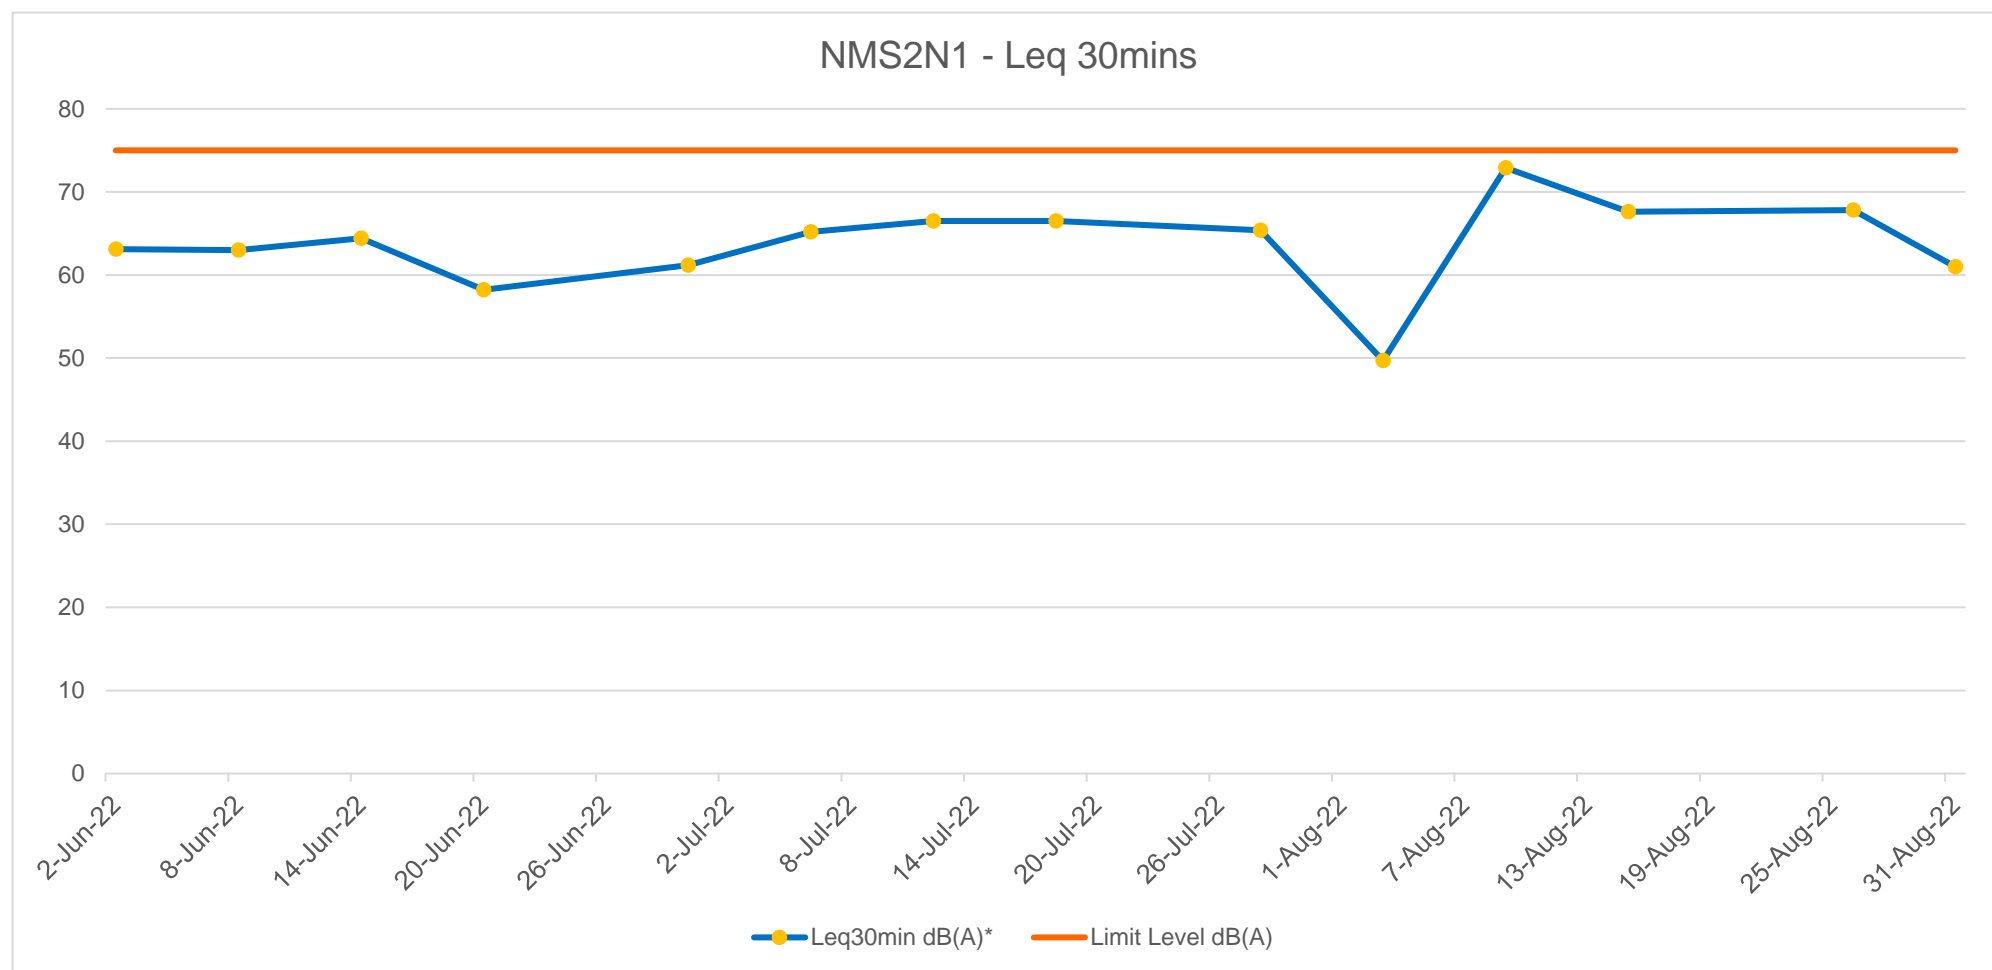


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-26
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


NMS3N – Leq30 Noise monitoring

Start Date & Time	Leq dB(A)	L90 dB(A)	L10 dB(A)	Limit Level:
02/06/2022	62.3	67.1	46.7	75
08/06/2022	68.8	71.2	53.4	75
14/06/2022	61.2	64.1	54.0	75
20/06/2022	62.0	64.1	53.4	75
30/06/2022	51.7	64.9	49.4	75
06/07/2022	66.4	60.5	74.4	75
12/07/2022	63.3	60.4	69.1	75
18/07/2022	67.4	63.5	70.7	75
28/07/2022	67.9	64.0	71.7	75
03/08/2022	54.5	55.8	52.5	75
09/08/2022	68.8	70.5	66.5	75
15/08/2022	68.6	70.2	67.7	75
26/08/2022	57.2	59.9	52.7	75
31/08/2022	56.1	59.2	46.8	75
Action Level:	When one valid documented complaint is received			
Limit Level:	75.0 dB(A)			

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-27
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


NMS3N – Leq30 Noise monitoring

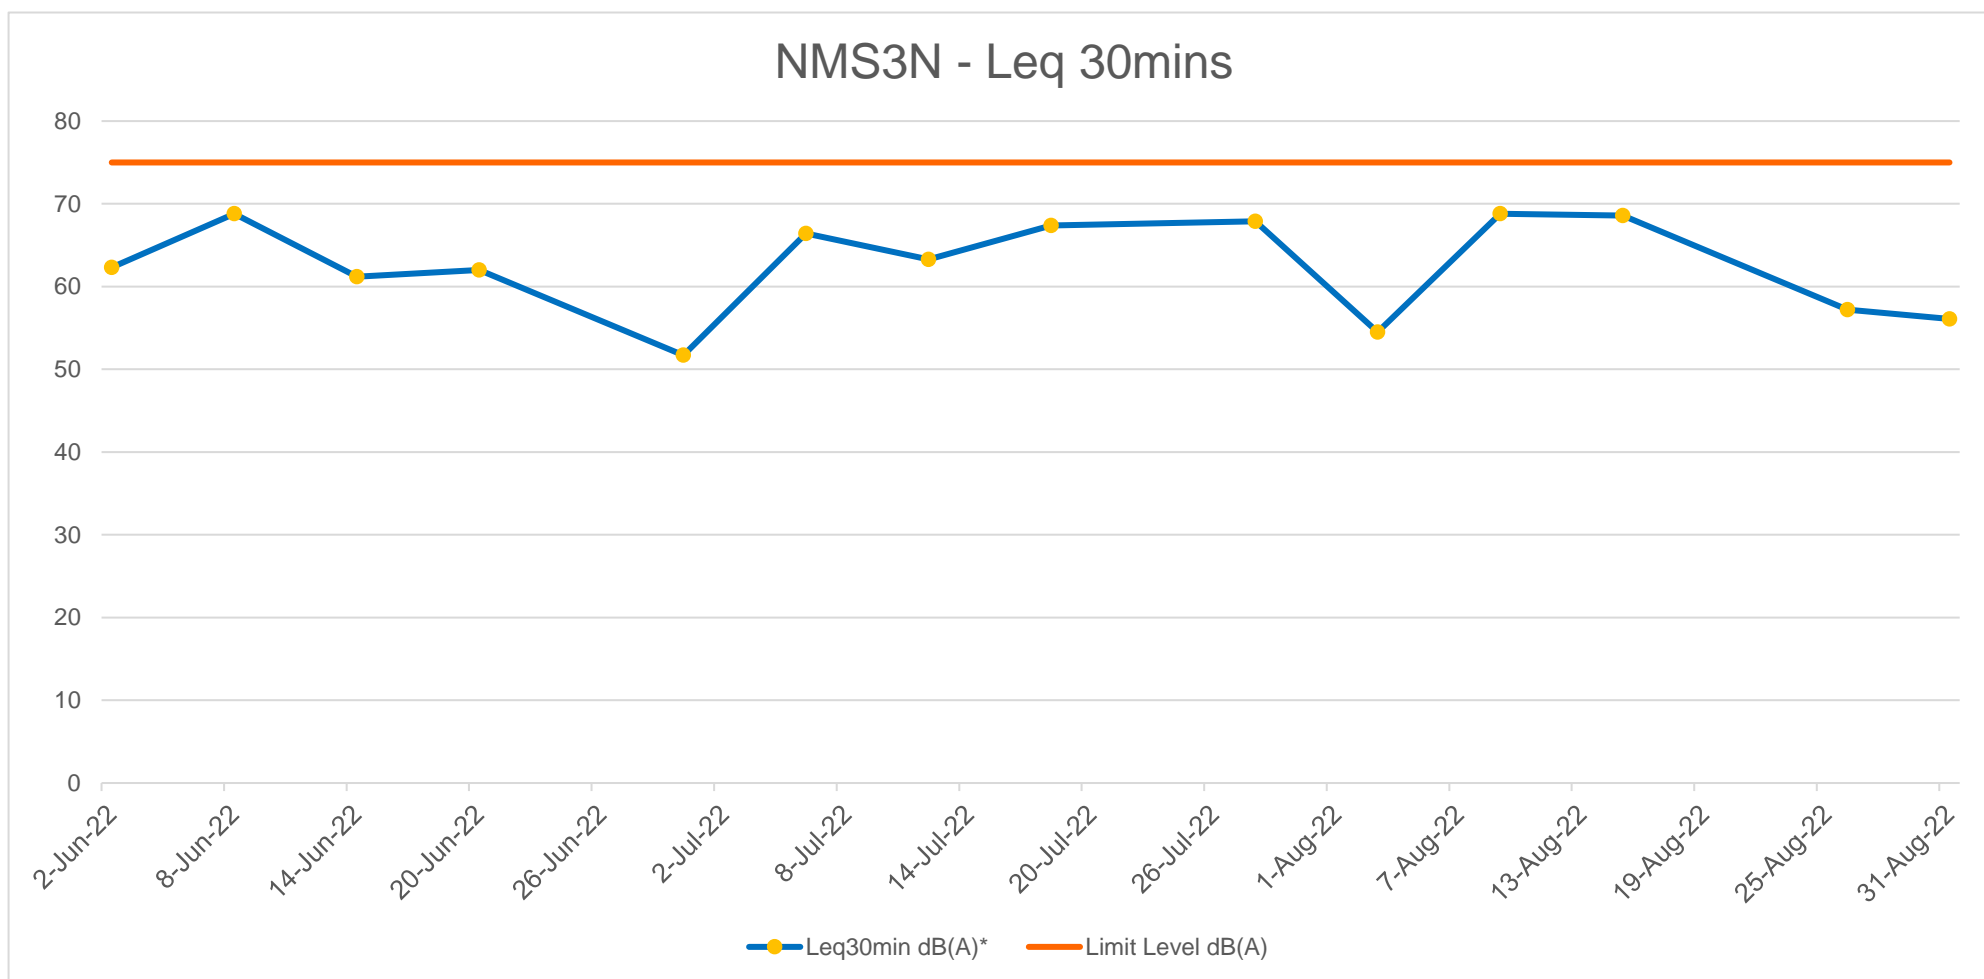


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-28
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22


NMS4N – Leq30 Noise monitoring

Start Date & Time	Leq dB(A)	L90 dB(A)	L10 dB(A)	Limit Level:
02/06/2022	57.5	60.6	45.7	75
08/06/2022	68.8	70.9	53.1	75
14/06/2022	58.3	60.7	54.2	75
20/06/2022	60.1	63.0	55.1	75
30/06/2022	65.9	73.3	55.6	75
06/07/2022	67.0	62.4	76.1	75
12/07/2022	56.3	52.5	65.7	75
18/07/2022	66.9	64.3	69.7	75
28/07/2022	63.0	60.7	65.1	75
03/08/2022	47.4	49.3	42.7	75
09/08/2022	70.5	72.0	67.7	75
15/08/2022	66.7	69.1	66.0	75
26/08/2022	56.7	60.8	52.4	75
31/08/2022	52.3	54.0	48.2	75
Action Level:	When one valid documented complaint is received			
Limit Level:	75.0 dB(A)			

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	G-29
		Ref#	-
	Quarterly EM&A Report	Rev.	01
		Date	Sep 22

NMS4N – Leq30 Noise monitoring

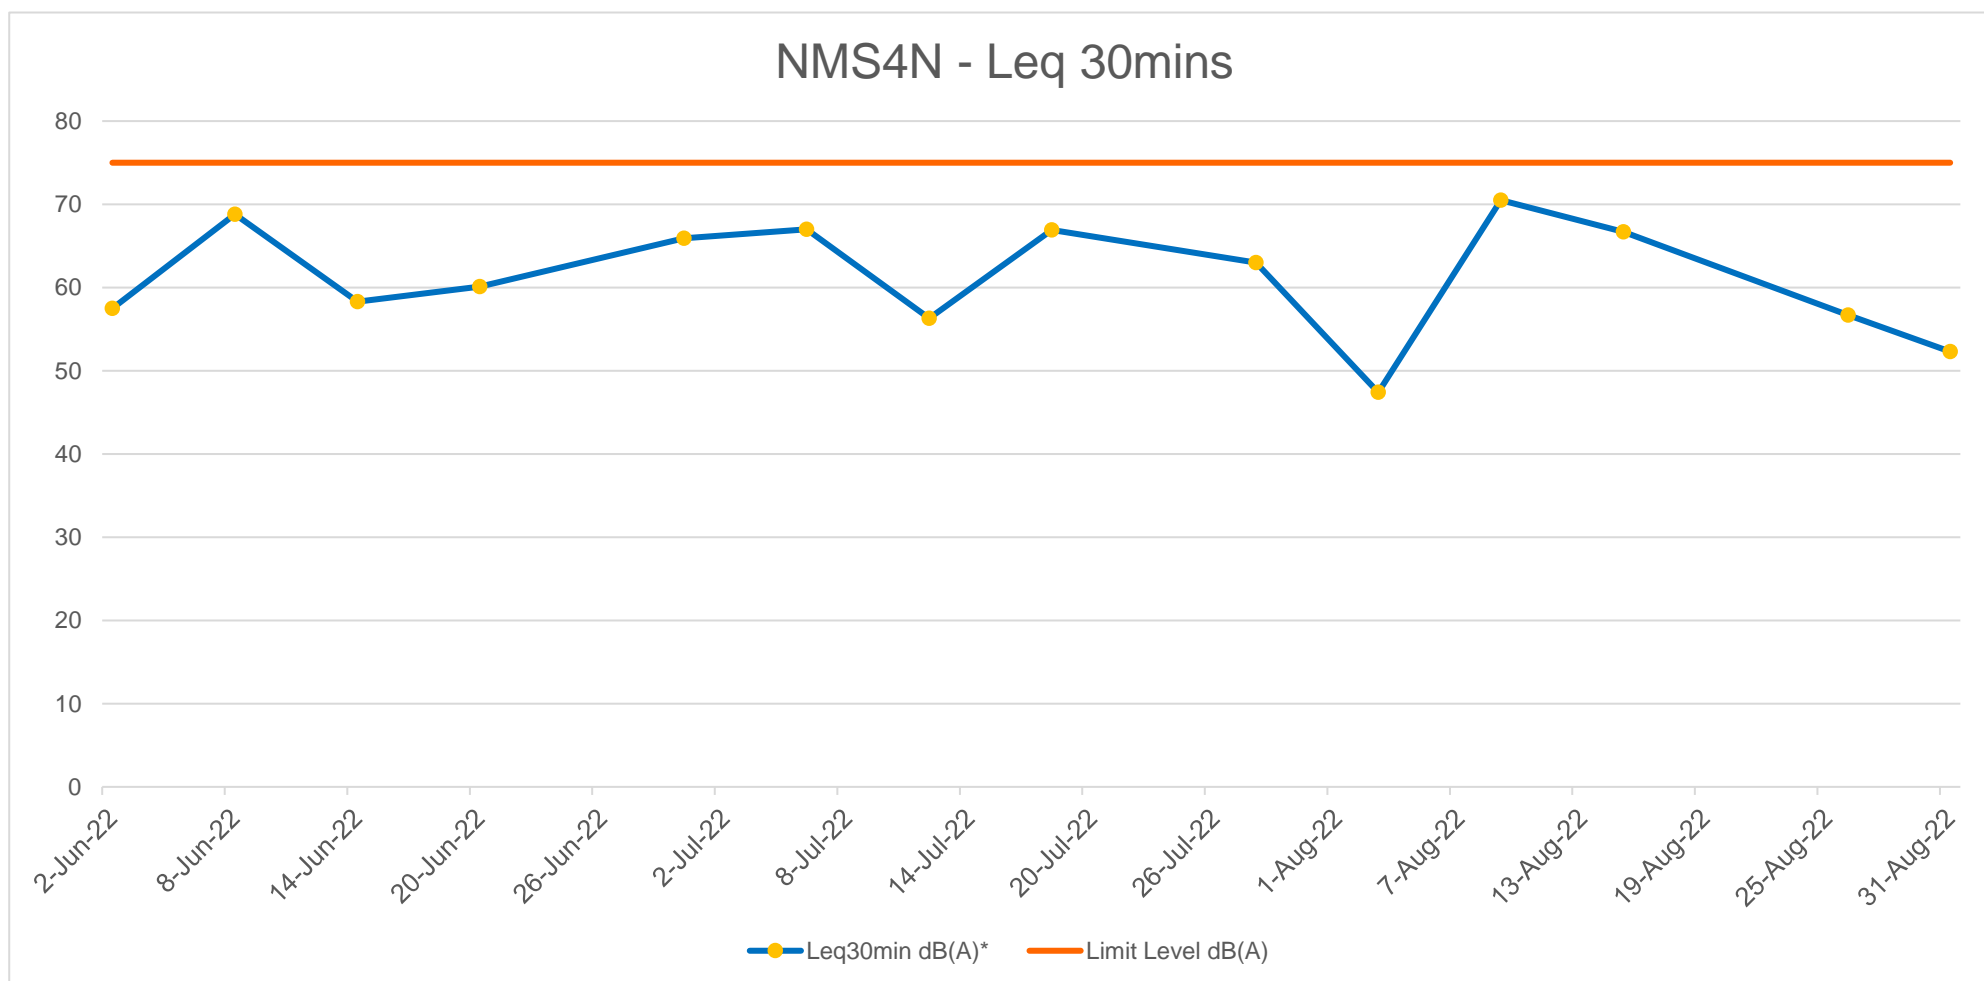

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	H-1
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22


APPENDIX H - SUMMARY OF WASTE FLOW TABLE

Monthly Summary Waste Flow Table for 2022 Year


Month	Total Quantity Generated	Actual Quantities of Inert C&D Materials Generated Monthly					Actual Quantities of C&D Wastes Generated Monthly				
		Hard Rock and Large Borken Concrete	Reused in the Contract	Reused in other Projects	Disposal as Public Fill	Imported Fill	Metals	Paper / Cardboard Packaging	Plastics (see note 3)	Chemical Waste	Other, e.g. general refuse
		(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	[in '000kg]	[in '000kg]	[in '000kg]	[in '000kg]	[in Tonne]
Jan	0.142	0.000	0.000	0.000	0.142	0.000	0.000	0.000	0.000	0.000	0.000
Feb	0.100	0.000	0.000	0.000	0.100	0.000	0.000	0.000	0.000	0.000	0.000
Mar	0.040	0.000	0.000	0.000	0.040	0.000	0.000	0.000	0.000	0.000	0.000
Apr	0.010	0.000	0.000	0.000	0.010	0.000	0.000	0.000	0.000	0.000	0.000
May	0.066	0.000	0.000	0.000	0.064	0.000	0.000	0.000	0.000	0.000	0.002
June	0.017	0.000	0.000	0.000	0.017	0.000	0.000	0.000	0.000	0.000	0.000
Sub-Total	0.375	0.000	0.000	0.000	0.373	0.000	0.000	0.000	0.000	0.000	0.002
July	0.670	0.000	0.000	0.000	0.670	0.000	0.000	0.000	0.000	0.000	0.000
Aug	0.727	0.000	0.000	0.000	0.727	0.000	0.000	0.000	0.000	0.000	0.000
Sep	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Oct	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Nov	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Dec	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total	1.772	0.000	0.000	0.000	1.770	0.000	0.000	0.000	0.000	0.000	0.002

Note:

- 1) The performance targets are given in the Environmental Management Plan.
- (2) The waste flow table shall also include C&D materials to be imported for use at the Site.
- (3) Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging material.

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	I-1
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22

APPENDIX I - CUMULATIVE STATISTICS ON COMPLAINTS, NOTIFICATIONS OF SUMMONS

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O		Page	I-2
			Ref#	-
	Quarterly EM&A Report		Rev.	01
			Date	Sep 22

Appendix I - Cumulative Statistics on Complaints, Notifications of Summons, Successful Prosecutions and Public Engagement Activities

Environmental Complaints Log

Complaint Log No.	Date of Complaint	Received From	Received By	Nature of Environmental Complaint	Relevant to the Construction Work of Project Site? (Y/N)	Investigation/ Mitigation Action	Status
001	28 December 2021	EPD	ET	Waste Management	N	The investigation report was submitted on 7 January 2022	Closed

Remark: * No Notifications of Summons or Successful Prosecutions were received during the reporting period.

Cumulative Statistics on Complaints, Notifications of Summons and Successful Prosecutions and Public Engagement Activities

Reporting Period	Complaints	Notifications of Summons and Prosecutions	Public Engagement Activities
2022/06	0	0	0
2022/07	0	0	0
2022/08	0	0	0
Cumulative Project-to-Date	1	0	0