



Drainage Services Department

Port Shelter Sewerage, Stage 3 – Sewerage Works at Po Toi O Monthly EM&A Report (October 2025)

Prepared by

SGS Hong Kong Limited

Certified by:

A handwritten signature in black ink, appearing to be 'JH' inside a circular loop.

Johnathan Ho

Environmental Team Leader

Verified by:

A handwritten signature in black ink, appearing to be 'F.C. Tsang' in a cursive style.

F.C. Tsang

Independent Environmental Checker

Our Ref: PL-202511016

Drainage Services Department
Special Duty Division
42/F, Revenue Tower, 5 Gloucester Road,
Wan Chai, Hong Kong.

Attention: Mr. Gary CHUNG

14 November 2025

Dear Gary,

**Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O
Monthly EM&A Report for October 2025**

Reference is made to your submission of the Monthly EM&A Report for October 2025 received by email on 10 November 2025 and the subsequent revision on 14 November 2025. We are pleased to inform you that we have no adverse comment on the captioned report.

Thank you for your attention. Please do not hesitate to contact the undersigned should you have any queries.

Yours faithfully,



F.C. Tsang
Independent Environmental Checker

cc. ETL – Johnathan HO





**Drainage Services Department
Port Shelter Sewerage, Stage 3 – Sewerage
Works at Po Toi O
Monthly EM&A Report
(Period from 1 to 31 October 2025)**

Prepared by

SGS Hong Kong Limited

Drainage Services Department

Issue and Revision Record					
Revision	Description	Prepared by	Checked by	Approved by	Date
01	Submission	Various	Johnathan Ho 	Roy Hung 	Nov 2025

Disclaimer

This document is issued by the Company under its General Conditions of Service accessible at <http://www.sgs.com/en-hk/Terms-and-Conditions.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	3
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

TABLE OF CONTENT

1.	EXECUTIVE SUMMARY	4
2.	INTRODUCTION.....	6
3.	AIR QUALITY	9
4.	NOISE	17
5.	WATER QUALITY	21
6.	WASTE MANAGEMENT	25
7.	ENVIRONMENTAL SITE INSPECTION AND AUDIT	26
8.	FUTURE KEY ISSUES	27
9.	CONCLUSION	29
	FIGURE 2-1 – LAYOUT PLAN OF THE CAPTIONED PROJECT	
	FIGURE 3-1 PROPOSED AIR QUALITY AND NOISE MONITORING STATIONS LOCATIONS.....	
	FIGURE 5-1 LOCATIONS OF WATER QUALITY IMPACT MONITORING STATIONS.....	
	APPENDIX A – PROJECT ORGANIZATION CHART	
	APPENDIX B – CONSTRUCTION PROGRAMME	
	APPENDIX C – METEOROLOGICAL DATA.....	
	APPENDIX D – AIR QUALITY MONITORING EQUIPMENT CALIBRATION CERTIFICATES.....	
	APPENDIX E – METHODOLOGY FOR CORRELATION CALCULATION BETWEEN POTABLE LASER DUST METER AND HIGH-VOLUME SAMPLER.....	
	APPENDIX F – AIR QUALITY AND NOISE IMPACT MONITORING SCHEDULE.....	
	APPENDIX G – AIR QUALITY MONITORING RESULT	
	APPENDIX H – EVENT AND ACTION PLAN.....	
	APPENDIX I - NOISE MONITORING EQUIPMENT CALIBRATION CERTIFICATES.....	
	APPENDIX J - NOISE IMPACT MONITORING RESULT	
	APPENDIX K – WATER QUALITY MONITORING SCHEDULES	
	APPENDIX L – MONTHLY SUMMARY OF WASTE FLOW	
	APPENDIX M - IMPLEMENTATION SCHEDULE OF RECOMMENDED MITIGATION MEASURES	
	APPENDIX N - RECOMMENDED MITIGATION MEASURES AND PROACTIVE ENVIRONMENTAL PROTECTION PROFORMA	
	APPENDIX O - CUMULATIVE STATISTICS ON COMPLAINTS, NOTIFICATIONS OF SUMMONS.....	

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	4
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

1. EXECUTIVE SUMMARY

- 1.1 The proposed sewerage works in Po Toi O (hereafter as “the Project”) is an environmental enhancement project that aims to improve environmental hygiene of the Po Toi O area. The Environmental Impact Assessment (EIA) Report for the Project (Register No: AEIAR-206/2017) was approved on 27 January 2017. The Environmental Permit (EP) (Permit No.: EP-516/2016) was issued on 27 January 2017 and is the current permit for the Project.
- 1.2 Société Générale de Surveillance (SGS) Hong Kong Limited has been appointed by Drainage Services Department (DSD) under service contract no. SD 4/2024 as the Environmental Team (ET) to undertake the EM&A programme during construction phase of the Project in accordance with the approved EM&A Manual for the Project.
- 1.3 This is the 56th monthly Environmental Monitoring & Audit (EM&A) Report prepared by SGS for the Project. This report summarized the monitoring results and audits findings of the EM&A programme under the EP and the EM&A Manual of the Project during the reporting period of 1 October 2025 to 31 October 2025.

Key Construction Works During the Reporting Period

- 1.4 The main works undertaken during the reporting period are as follows:
- Major activities in the reporting month:
 - a) Construction of village sewer;
 - b) E&M works for Po Toi O Sewage Treatment Plant;

Summary of Exceedances, Investigation and Follow-up

- 1.5 There was no action or limit level exceedance record of construction noise and air quality was recorded in the reporting month.


Complaint Handling, Prosecution and Public Engagement

- 1.6 No complaints, notification of summons and successful prosecution was received in the reporting period. No public engagement activity was conducted in the reporting month.
- 1.7 No notification of summons and successful prosecution was received in the reporting period. No public engagement activity was conducted in the reporting month.
- 1.8 No air quality, noise and water complaints was received in the reporting month.

Reporting Change of EM&A Programme

- 1.9 No reporting change of the EM&A programme in this reporting month.


Future Key Issues

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	5
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

1.10 The main works will be anticipated in the next reporting period are as follows:

-Major activities in the upcoming month:

- Construction of village sewer;
- TBM;
- E&M works for Po Toi O Sewage Treatment Plant

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	6
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

2. INTRODUCTION

Project Information

2.1 Société Générale de Surveillance (SGS) Hong Kong Limited has been appointed by Drainage Services Department (DSD) as the Environmental Team (ET) to undertake the EM&A programme during construction phase of the Project in accordance to the approved EM&A Manual for the proposed sewerage works in Po Toi O (hereafter as “The Project”), an environmental enhancement project that aims to improve environmental hygiene of the Po Toi O area.

Project Background

2.2 Po Toi O is located in the southern part of Sai Kung District, next to Clear Water Bay. There is a small settlement called Po Toi O village around the bay. There is currently no public sewerage system for the village. Sewage and wastewater generated by local residents and local restaurants are treated by Septic tanks/ soakaway system (STS).

2.3 Sewage works at Po Toi O comprise sewage collection, treatment and disposal facilities at Po Toi O under Port Shelter Sewerage, Stage 3 – Sewerage Works at Po Toi O.


2.4 The Project in Po Toi O mainly comprises of the following items:

- a. Provision of village sewerage to the unsewered areas of Po Toi O. The works involve construction of about 800m of gravity sewers and 400m of rising mains;
- b. Construction of a local sewage treatment plant (STP) with Average Dry Weather Flow (ADWF) of about 139m³/day; and
- c. Construction of a submarine outfall of about 385m in length.

2.5 The Project consists of the following works, which are classified as Designated Projects under Part I, Schedule 2 of the Environmental Impact Assessment Ordinance (EIAO):

- a. Item Q.1 – A sewage treatment plant and portion of sewer alignments in a conservation area;
- b. Item C.12 (a) (v) and (vii) – A dredging operation which is less than 500m from the nearest boundary of an existing fish culture zone and coastal protection area; and
- c. Item F.6 – A submarine sewage outfall.

2.6 The Environmental Impact Assessment (EIA) Report “Port Shelter Sewerage, Stage 3 – Sewerage Works at Po Toi O” (Register No: AEIAR-206/2017) was approved on 27 January 2017. An Environmental Permit (EP) (Permit No.: EP-516/2016) was issued on 27 January 2017 and is the current permit for the Project. The EM&A programme of the Project shall be implemented in accordance with the requirements and procedures set out in the EM&A Manual and the Environmental Permit (EP) of the Project (Permit No.: EP-516/2016).

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	7
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

2.7 The air quality and noise baseline monitoring works were conducted from 23 December 2020 to 5 January 2021 and the water quality baseline monitoring work was conducted from 17 December 2020 to 12 January 2021. A Baseline Monitoring Report had been submitted to EPD on 10 March 2021.

Scope of Report


2.8 This is the 56th EM&A Report prepared by SGS for the Port Shelter Sewerage, Stage 3 – Sewerage Works at Po Toi O. This report summarized the monitoring results and audits findings of the EM&A programme under the EP of the Project and in accordance with the EM&A Manual during the reporting period of 1 October 2025 to 31 October 2025.

Project Organisation

2.9 The project organization structure is shown in **Appendix A**. The key personnel contact names and numbers are summarized in **Table 2-1**.

Table 2-1 Contact information of key personnel

Position	Party	Name	Telephone
Project Proponent	Drainage Services Department (DSD)	Mr. Gary Chung	2594 7227
Senior Resident Engineer (SRE)	Binnies Hong Kong Limited (Binnies)	Mr. Eugene Chan	6392 3809
Independent Environmental Checker (IEC)	Acuity Sustainability Consulting Limited (ASC)	Dr. F.C. Tsang	2698 8060
Environmental Team (ET)	Société Générale de Surveillance (SGS) Hong Kong Limited	Mr. Johnathan Ho	9236 5528
Environmental Officer	China Geo-engineering Corporation (CGC)	Mr. Alex Chow	5918 9179

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	8
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25


Construction Programme and Activities

2.10 The main works undertaken in the reporting period are as follows:

Major activities in the reporting month:

1. Construction of village sewer;
2. E&M works for Po Toi O Sewage Treatment Plant

The Construction Programme is shown in **Appendix B**. The general layout plan of the Project is shown in **Figure 2-1**.

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	9
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

3. AIR QUALITY

Monitoring Requirements


- 3.1 In accordance with the EM&A Manual, impact air quality monitoring shall be carried out throughout the construction period at all approved air quality monitoring locations (AMSs). 24- hours total suspended particles (TSP) monitoring shall be conducted at least once every 6 days. Meanwhile, 1-hour TSP monitoring shall be conducted at least 3 times every 6 days when the highest dust impact takes place. The Action and Limit levels for 1-hour and 24-hours TSP level are provided in **Table 3-1** and **Table 3-2**.

Table 3-1 Action and Limit Levels for 1-hour-TSP

Parameter	Air Quality Monitoring Station (AMSs)	Action Level ($\mu\text{g}/\text{m}^3$)	Limit Level ($\mu\text{g}/\text{m}^3$)
1-hr TSP ($\mu\text{g}/\text{m}^3$)	AMS1N	319	500 $\mu\text{g}/\text{m}^3$
	AMS2N1	279	
	AMS3N	303	
	AMS4N	278	

Table 3-2 Action and Limit Levels for 24-hour-TSP

Parameter	Air Quality Monitoring Station (AMSs)	Action Level ($\mu\text{g}/\text{m}^3$)	Limit Level ($\mu\text{g}/\text{m}^3$)
24-hr TSP ($\mu\text{g}/\text{m}^3$)	AMS1N	153	260 $\mu\text{g}/\text{m}^3$
	AMS2N1	179	
	AMS3N	158	
	AMS4N	144	

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	10
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25


Monitoring Equipment

- 3.2 The 24-hour TSP air quality monitoring was performed using High Volume Air Samplers (HVS) at each of the designated monitoring stations. The HVS are calibrated by a HVS calibrator. Meanwhile 1-hour TSP air quality monitoring was performed using portable TSP monitors. The equipment used for air quality monitoring are given in **Table 3-3**.

Table 3-3 Equipment Used for Air Quality Monitoring

Air Quality Monitoring	Brand and Model of Equipment	Serial Number
24-hour TSP*	Graseby GMW High Volume Sampler	1180
		1174
		2483
	Graseby 105 High Volume Sampler	9795
	Tisch TE-5025A High Volume Sampler Calibrator	4317
1-hour TSP	Sibata LD-3B Portable TSP Monitors	014746
		155331
		597340
		597227

- 3.3 Meteorological information (such as the humidity, rainfall, air pressure and temperature etc.) were collected from Hong Kong Observatory (HKO)'s Weather Stations.
- 3.4 According to the approved EM&A Manual, wind data monitoring equipment shall be provided and setup for logging wind speed and wind direction near the dust monitoring locations. The equipment installation location shall be proposed by the ET and agreed with the IEC. For installation and operation of wind data monitoring equipment, the following points shall be observed:
- The wind sensors should be installed 10 m above ground so that they are clear of

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	11
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

obstructions or turbulence caused by buildings.

- b. The wind data should be captured by a data logger. The data shall be downloaded for analysis at least once a month.
- c. The wind data monitoring equipment should be re-calibrated at least once every six months.
- d. Wind direction should be divided into 16 sectors of 22.5 degrees each.

3.5 It is noted that after liaison with the Po Toi O resident's representative on 22 December 2020, the resident's representative has rejected the access to the space and power supply for ET to install the wind data monitoring stations. Therefore, ET had proposed the alternative method for wind data collection according to section 3.4.7 of EM&A Manual.

3.6 The alternative method for wind data collection was adopt the wind data information collected from the HKO's Waglan Island weather station as the representative wind data. Although there are other closer weather stations, Waglan Island Station was selected as it is the nearest weather station that measures wind data information mentioned above.


3.7 The meteorological data from HKO's Weather Station is given in **Appendix C**.

Monitoring Parameters, Frequency and Duration

3.8 The parameters, duration and frequency for air quality impact monitoring is given in Table 3-4. Monitoring stations AMS1N, AMS2N1, AMS3N and AMS4N were set up in accordance to the requirements for placement of equipment, as set out in section 3.5.3 of the EM&A manual of the Project. Locations of the alternative AMSs are given in **Figure 3-1**.

Table 3-4 Monitoring Parameters for Air Quality Monitoring

Identification no.	Location	Type of monitoring	Parameters	Frequency
AMS1N*	Footpath above House No. 28 Po Toi O Chuen Road	TSP	1-hr TSP 24-hr TSP	1-hour TSP: At least 3 times for 1- hour with every 6 days 24-hour TSP: Once every 6 days
AMS2N1*	Open space Approx. 15 m from Hung Shing Temple			
AMS3N*	Vacant land near Temporary Structure (House) Rocky Shore			

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	12
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

AMS4N*	Resting shelter near Seacrest Villas			
--------	--------------------------------------	--	--	--

Notes:

*- Due to a number of limitations identified at the air quality monitoring stations in the Approved EM&A Manual for the Project, the monitoring location AMS1 – AMS4 were replaced by alternative monitoring location AMS1N – AMS4N, which were approved by ER and IEC.


Monitoring Methodology for 24-hour TSP Monitoring

3.9 The HVS was installed in the vicinity of the air quality monitoring stations. The following criteria were considered in the installation of the HVS:

- a. A horizontal platform with appropriate support to secure the sampler against gusty wind was provided.
- b. The distance between the HVS and any obstacles, such as buildings, was at least twice the height that the obstacle protrudes above the HVS.
- c. A minimum of 2 meters Separation from walls, parapets and penthouse for rooftop sampler.
- d. A minimum of 2 meters Separation from any supporting structure, measured horizontally.
- e. No furnace or incinerator flues nearby.
- f. Airflow around the sampler was unrestricted.
- g. Permission was obtained to set up the samplers and access to the monitoring stations.
- h. A secured supply of electricity was obtained to operate the samplers.
- i. The sampler was located more than 20 meters from any dripline.
- j. Any wire fence and gate, required to protect the sampler, did not obstruct the monitoring process.
- k. Flow control accuracy was kept within $\pm 2.5\%$ deviation over 24-hour sampling period.

3.10 The following procedures to be followed for the preparation of filter papers of the HVS:

- a. Glass fibre filters, G810 were labelled and sufficient filters that were clean and without pinholes were selected.
- b. All filters were equilibrated in the conditioning environment for 24 hours before weighing. The conditioning environment temperature was around 25 °C and not variable by more than ± 3 °C; the relative humidity (RH) was < 50% and not variable by more than $\pm 5\%$. A convenient working RH was 40%.


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	13
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

- c. All filter papers were prepared and analysed by a HOKLAS accredited laboratory and has comprehensive quality assurance and quality control programmes.

3.11 The following procedures are followed throughout air quality monitoring works:

- a. The power supply was checked to ensure the HVS works properly.
- b. The filter holder and the area surrounding the filter were cleaned.
- c. The filter holder was removed by loosening the four bolts and a new filter, with stamped number upward, on a supporting screen was aligned carefully.
- d. The filter was properly aligned on the screen so that the gasket formed an airtight seal on the outer edges of the filter.
- e. The swing bolts were fastened to hold the filter holder down to the frame. The pressure applied was sufficient to avoid air leakage at the edges.
- f. Then the shelter lid was closed and was secured with the aluminum strip.
- g. The HVS was warmed-up for about 5 minutes to establish run-temperature conditions.
- h. A new flow rate record sheet was set into the flow recorder.
- i. On site temperature and atmospheric pressure readings were taken and the flow rate of the HVS was checked and adjusted at around 1.1 m³ /min and complied with the range specified in the updated EM&A Manual (i.e., 0.6-1.7 m³ /min).
- j. The programmable digital timer was set for a sampling period of 24 hrs, and the starting time, weather condition and the filter number were recorded.
- k. The initial elapsed time was recorded.
- l. At the end of sampling, on site temperature and atmospheric pressure readings were taken and the final flow rate of the HVS was checked and recorded.
- m. The final elapsed time was recorded.
- n. The sampled filter was removed carefully and folded in half-length so that only surfaces with collected particulate matter were in contact.
- o. It was then placed in a clean plastic envelope and sealed.
- p. All monitoring information was recorded on a standard data sheet.

3.12 The following procedures are followed for the maintenance and calibration of HVS:

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	14
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25


- a. The HVS and its accessories were maintained in good working condition, such as replacing motor brushes routinely and checking electrical wiring to ensure a continuous power supply.
- b. 5-point calibration of the HVS was conducted using TE-5025A Calibration Kit prior to the commencement of monitoring. Bi-monthly 5-point calibration of the HVS will be carried out during impact monitoring. The details for HVS calibration against the TE-5025A Calibration Kit is given in **Appendix D**.

Monitoring Methodology for 24-hour TSP Monitoring by Direct Reading Dust Meters

- 3.13 Since power supply for HVS for 24-hour TSP monitoring at alternative monitoring locations (i.e., AMS1N to AMS4N) were rejected, the use of direct reading dust meters is adopted to measure both 1-hour and 24-hour average TSP levels for the reporting month.
- 3.14 In accordance to Condition 3.1 of the Project's EP and Section 3.3 of the Project's EM&A Manual, the proposal for alternative monitoring equipment (i.e., direct reading dust meter) for TSP monitoring was approved by IEC and ER.
- 3.15 The measuring procedures of the direct reading dust meters are given in Section 3.5.10.
- 3.16 24 consecutive 1-hour TSP concentration measurement results is adopted for the evaluation of 24-hour TSP concentration. Results are manually logged daily, during daily maintenance of the dust meter. Calculation of the value of 24-hour TSP concentration is given by the average of 24 calculated 1-hour TSP concentration, where the calculated 1-hr TSP concentration is given by the product of the direct reading and the K-factor based on the correlation results between the direct reading meter and HVS. Details for the correlation methodology and correlation record are given in **Appendix E**.
- 3.17 HVS for 24-hr TSP monitoring will be adopted once secured supply of electricity becomes available for any agreed TSP monitoring locations.

Monitoring Methodology for 1-Hour TSP Monitoring

- 3.18 The measuring procedures of the direct reading dust meters were in accordance with the Manufacturer's Instruction Manual as follows:
 - a. Turn the power on.
 - b. Close the air collecting opening cover.
 - c. Push the "TIME SETTING" switch to [BG].
 - d. Push "START/STOP" switch to perform background measurement for 6 seconds.
 - e. Turn the knob at SENSI ADJ position to insert the light scattering plate.
 - f. Leave the equipment for 1 minute upon "SPAN CHECK" is indicated in the display.

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	15
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

- g. Push “START/STOP” switch to perform automatic sensitivity adjustment. This measurement takes 1 minute.
- h. Pull out the knob and return it to MEASURE position.
- i. Push the “TIME SETTING” switch the time set in the display to 3 hours.
- j. Lower down the air collection opening cover.
- k. Push “START/STOP” switch to start measurement.

3.19 The following procedures are followed for the maintenance and calibration of direct reading dust meters:

- a. The 1-hour TSP meter was calibrated at 1-year intervals against with high volume sampler.
- b. Calibration certificates of the Laser Dust Monitors are provided in **Appendix D**. 1-hour validation checking of the TSP meter against HVS is carried out yearly at the air quality monitoring locations.

Monitoring Results and Observations

3.20 The schedule for environmental monitoring in the reporting period is provided in **Appendix F**.


3.21 The air quality monitoring results for 1-hour and 24-hour air quality monitoring are summarized in **Table 3-6** and **Table 3-7**. Air quality monitoring data and graphical presentation of the data are provided in **Appendix G**.

Table 3-6 1-hour Air Quality Monitoring Results in the Reporting Period

Parameter	Monitoring Station	Average ($\mu\text{g}/\text{m}^3$)	Range ($\mu\text{g}/\text{m}^3$)
1-hr TSP in $\mu\text{g}/\text{m}^3$	AMS1N	36.9	30 – 48
	AMS2N1	39.1	27 – 53
	AMS3N	30.4	24 – 37
	AMS4N	31.7	27 - 36

Table 3-7 24-hour Air Quality Monitoring Results in the Reporting Period

Parameter	Monitoring Station	Average ($\mu\text{g}/\text{m}^3$)	Range ($\mu\text{g}/\text{m}^3$)
24-hr TSP in $\mu\text{g}/\text{m}^3$	AMS1N	38.8	25 – 56

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	16
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25


	AMS2N1	42.3	26 - 64
	AMS3N	28.2	23 - 35
	AMS4N	34.0	25 - 40

3.22 No Action or Limit Level exceedances of air quality were recorded in the reporting month. No air quality between 0700 – 1900 hours on normal weekdays (i.e., Mondays to Saturdays) were received in the reporting month.

Other Influencing Factors of the Monitoring Results

3.23 Major emission sources during air quality monitoring in the reporting period were mainly vehicle emission from Po Toi O Chuen Road and nearby residents' activities.

3.24 The event and action plan for air quality monitoring are given in **Appendix H**.

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	17
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

4. NOISE

Monitoring Requirements

- 4.1 In accordance with the EM&A Manual, noise impact monitoring was conducted during daytime construction work on normal weekdays (0700-1900 hours between Monday to Saturday), 1 set of 30-min measurement shall be carried out at approved noise monitoring stations (NMSs) every week based on the measurement procedures under EPD's "Technical Memorandum for the Assessment of Noise from Places Other Than Domestic Premises, Public Places or Construction Sites". The Action and Limit levels for construction noise monitoring is provided in **Table 4-1**.

Table 4-1 Action and Limit Levels for Construction Noise


NMSs ID	Noise Sensitive Receivers	Descriptions	Action Level	Limit Level
NMS1N	PTO_N1	Footpath Above House No. 28 Po Toi O Chuen Road	When one documented complaint is received from any one of the noise sensitive receivers	75 dB(A)*
NMS2N1	PTO_N2	Open Space Approx. 15 m from Hung Shing Temple		
NMS3N	PTO_N3	Vacant Land Near Temporary Structure (House) Rocky Shore		
NMS4N	PTO_N4	Resting Shelter Near Seacrest Villas		

Monitoring Equipment

- 4.2 Noise monitoring was completed using sound level meters at each NMSs. The sound levels meters deployed comply with the International Electrotechnical Commission Publications (IEC) 651:1979 (Type 1) and 804:1985 (Type 1) specifications. Acoustic calibrator was deployed to calibrate the sound level meters at a given sound pressure level. The equipment used for noise impact monitoring is given in **Table 4-2**.

Table 4-2 Noise Monitoring Equipment

Equipment	Brand and Model	Serial No. /Equipment ID
Integrated Sound Level Meter	Rion NL-52	00264519

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	18
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

Integrated Sound Level Meter	Rion NL-52	00264520
Acoustic Calibrator	Gastle GA607	038641
Anemometer	AZ Instrument – AZ 8908	1064869

Monitoring Locations

4.3 Due to the limitation posed by the approved monitoring stations set out by the EM&A manual, alternative monitoring stations NMS1N, NMS2N1, NMS3N and NMS4N were proposed in accordance to Section 4.5.3 of the EM&A Manual of the Project and approved from the ER and the IEC. The locations of the NMSs are given in **Figure 3-1**, and the details of the monitoring stations are illustrated in **Table 4-3**.


Table 4-3 Description of Proposed Noise Monitoring Locations

NMSs ID	Location	Type of measurement	Type of Monitoring	Duration
NMS1N*	Footpath above House No. 28 Po Toi O Chuen Road	Free-Field	Noise	30 mins
NMS2N1*	Open space approximately 15 m from Hung Shing Temple			30 mins
NMS3N*	Vacant land near Temporary Structure (House) Rocky Shore			30 mins
NMS4N*	Resting shelter near Seacrest Villas			30 mins

Notes:

*For Free-field measurement, a correction of +3dB(A) should be made to the measured results.

* Due to the limitation posed by the approved monitoring stations set out by the EM&A manual, four alternative representative Noise Quality Monitoring Stations (NMSs) are proposed. The alternative monitoring Locations were approved by ER and IEC.

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	19
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

Monitoring Parameters and Frequency

4.4 The monitoring parameters, frequency and duration of impact noise monitoring are summarized in **Table 4-4**.


Table 4-4 Parameters for Noise Impact Monitoring

Parameter and Duration	Frequency
30-mins measurement at each monitoring station between 0700 and 1900 on normal weekdays. Leq, L ₁₀ and L ₉₀ would be recorded	At least once per week

Monitoring Methodology

4.5 The measuring procedures of the sound level meter were in accordance with the Manufacturer's Instruction Manual as follows:

- a. Free-field measurement was made for the noise monitoring stations.
- b. The sound level meter was set on a tripod at a height of 1.2 m above the ground.
- c. The battery condition was checked to ensure the correct functioning of the meter.
- d. Parameters such as frequency weighting, the time weighting and the measurement time were set as follows:
 - i. frequency weighting: A
 - ii. Time weighting: Fast
 - iii. Time measurement: Leq(30-minutes) during non-restricted hours i.e., 07:00 – 1900 on normal weekdays; Leq(5-minutes) during restricted hours i.e., 19:00 23:00 and 23:00 – 07:00 of normal weekdays, whole day of Sundays and Public Holidays
- e. Prior to and after each noise measurement, the meter was calibrated using the acoustic calibrator at a specified sound pressure level at a specified frequency. If the difference in the calibration level before and after measurement was more than 1 dB(A), the measurement would be considered invalid and repeat of noise measurement would be required after re-calibration or repair of the equipment.
- f. During the monitoring period, the Leq, L₁₀ and L₉₀ were recorded. In addition, site conditions and noise sources were recorded on a standard record sheet.
- g. Noise measurement was paused during periods of high intrusive noise (e.g., dog barking, helicopter noise) if possible. Observations were recorded when intrusive noise was unavoidable.
- h. Noise monitoring was cancelled in the presence of fog, rain, wind with a steady speed exceeding 5m/s, or wind with gusts exceeding 10m/s.

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	20
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

- 4.6 The following procedures are followed for the maintenance and calibration of sound level meters:
- The microphone head of the sound level meter was cleaned with soft cloth at regular
 - intervals.
 - The meter and calibrator were sent to the supplier or HOKLAS laboratory to check
 - and calibrate at yearly intervals.
 - Calibration certificates of the sound level meters, and acoustic calibrators are provided in **Appendix I**.

Monitoring Results and Observations

- 4.7 The schedule for environmental monitoring in the reporting period is provided in **Appendix F**.
- 4.8 The monitoring results for construction noise are summarized in **Table 4-5**. The noise monitoring data graphical presentation of the data is provided in **Appendix J**.

Table 4-5 Summary of Construction Noise Monitoring Results in the Reporting Period

NMSs ID	Construction Noise Level, dB(A)*, Leq (30 min)	Baseline Level, dB(A)	Limit Level, db(A)
NMS1N	66.6 dB(A)	62.7 dB(A)	75
NMS2N1	59.7 dB(A)	61.8 dB(A)	75
NMS3N	58.6 dB(A)	64.6 dB(A)	75
NMS4N	49.2 dB(A)	58.1 dB(A)	75


Note:

*- A correction of +3 dB(A) was made to the free field measurements. Leq (30min) was measured at 0700-1900 hours on normal weekdays.

- 4.9 No Action or Limit Level exceedance of construction noise was recorded in the reporting month.
- 4.10 No noise complaints from between 0700 – 1900 hours on normal weekdays was received in the reporting month.
- 4.11 The event and action plan are provided in **Appendix H**.

Other Influencing Factors of the Monitoring Results

- 4.12 Major noise sources during noise monitoring in the reporting period were mainly road traffic noise.


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	21
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

5. WATER QUALITY

Construction Phase

Monitoring Requirements

- 5.1 With the recommendations of the Project's EIA report, water quality impact monitoring shall be carried out 3 days per week, at mid-flood and mid-ebb tides (within ± 1.75 hour of the predicted time required) at all the approved Water Quality Monitoring Stations (WQMSs) during whole cofferdam installation/extraction work and during dredging works. The interval between two sets of monitoring shall not be less than 36 hours.
- 5.2 Replicate in-situ measurements of Suspended Solids (SS) and in-situ water quality data (temperature, pH, turbidity, water depth, salinity, dissolved oxygen and percentage of saturation) shall be collected.
- 5.3 Other relevant data should also be recorded, including monitoring location/position, time, tidal stages, weather conditions and any special observation or works that may affect the monitoring results in the vicinity.
- 5.4 To ensure sufficient data for robust analysis, duplicate in-situ data shall be collected. In case the difference in the duplicate in-situ measurement results is larger than 25%, the third set of in-situ measurement shall be carried out for result confirmation purpose.
- 5.5 Water samples shall be extracted at 1m below surface, 1m above seabed and the mid-depth level at where the water depth is at least 6m. However, if the water depth is less than 3m, water samples shall only be collected at the mid-depth level. For stations with depth less than 6m, the mid-depth sample can be omitted.
- 5.6 Tidal information was collected from Hong Kong Observatory (HKO)'s Tai Miu Wan Tidal Station, the closest tidal station to the Project. It was utilized to determine the schedule for water quality monitoring during mid-ebb and mid-flood period.
- 5.7 In addition, duplicated water samples for suspended solid analysis shall be collected at all the above stations and delivered to the HOKLAS accredited laboratory for analysis. Results for suspended solids shall be received back from the laboratory within 24-hour of the receipt of the samples.
- 5.8 Water quality impact monitoring shall also be conducted at the same frequency as monitoring throughout the whole cofferdam installation/extraction work and during dredging work. In case of exceedance of Action/Limit Level recorded, the frequency of water quality monitoring shall be increased as per the Event and Action Plan.
- 5.9 The submarine outfall works at the cofferdam has been suspended due to an engineering design issue. With reference to Section 5.2.9 of the EM&A manual, the water quality monitoring under the

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	22
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

environmental monitoring and audit programme was temporary suspended with effect from 10th February 2025 and shall recommence before the cofferdam works resume. The engineering team shall resolve the design issue and apply for a variation environmental permit (VEP) to cater for the new design. In the meantime, all marine construction works is ceased and no marine works in any forms shall be conducted before the variation environmental permit is issued and cofferdam works recommence.

Monitoring Equipment

5.10 The water quality monitoring (i.e. pH, salinity, temperature, turbidity and dissolved oxygen (DO)) was measured with Multi-Parameter Water Quality Meter at each of the designated monitoring stations. Water depth detector was used to measure the water depth of each monitoring locations. A global positioning device was used to locate the WMSs. Table 5-1 summarized the equipment used in water quality monitoring.

Table 5-1 Equipment Used for Water Quality Monitoring


Water Quality Monitoring Parameters	Brand and Model of Equipment
Multi-Parameter Water Quality Meter	Xylem-YSI ProDSS
Water Sampler	Kemmerer Bottle
Water Depth Detector	Xylem-YSI ProDSS
Global Positioning Device	Garmin eTrex H

Monitoring Parameters and Frequency

5.11 The monitoring parameters, monitoring periods and frequencies of the water quality monitoring are summarized in **Table 5-2**.

Table 5-2 Parameters of Water Quality Monitoring

Parameters	Duration	Frequency
Temperature (°C)	During Construction Phase: Throughout Installation And Extraction Of Cofferdam; And During Dredging	3 Days Per Week (The Interval Between Two Sets of Monitoring Shall Not Be Less Than 36 Hours.)
pH (pH Unit)		
Turbidity (NTU)		
Water Depth (m)		
Salinity (ppt)		
DO (mg/L and % Of Saturation)		
SS (mg/L)		

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	23
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

Monitoring Locations

5.12 According to section 5.2.6 of the EM&A manual of the project, 6 water quality monitoring stations (WMSs) are proposed at the Po Toi O FCZs, major amphioxus habitats and rocky shores where coral thrives. With reference to the tidal characteristics of Po Toi O Bay, 3 control stations are proposed where fresh marine water is not affected by the cofferdam installation/ extraction works, and 2 impact stations are proposed near the cofferdam under different tidal periods. All water quality monitoring stations show as **Figure 5-1** and **Table 5-3**.

Table 5-3 Summary of Water Quality Impact Monitoring Stations

Station	Monitoring period	Description	Easting	Northing
*WMS1N	Mid-Ebb, Mid-Flood	Po Toi O Fish Culture Zone	848416	845209
*WMS2N	Mid-Ebb, Mid-Flood	Po Toi O Fish Culture Zone	848505	815375
WMS3	Mid-Ebb, Mid-Flood	Rocky Shore with Corals	848644	815391
WMS4	Mid-Ebb, Mid-Flood	Rocky Shore with Corals	848774	815602
WMS5	Mid-Ebb, Mid-Flood	Rocky Shore with Corals	848578	815591
WMS6	Mid-Ebb, Mid-Flood	Major Amphioxus Habitat	848639	815523
I1	Mid-Flood	Impact monitoring Station	848643	815692
I2	Mid-Ebb	Impact monitoring Station	848722	815910
C1	Mid-Flood	Control station	848904	816052
C2	Mid-Ebb	Control station	848529	815373
C3	Mid-Ebb	Control station	848243	815710
WMS1	Mid-Ebb, Mid-Flood	Po Toi O Fish Culture Zone	848387	815201
WMS2	Mid-Ebb, Mid-Flood	Po Toi O Fish Culture Zone	848479	815378

Notes:


*WMS1N, WMS2N are new proposed alternative monitoring location. As previous EIA proposed monitoring location WMS1, WMS2 are situated in fish barges within the Fish Culture Zone (FCZ), and accesses to WMS1 and WMS2 were subsequently denied by the tenants of the fish barges. The relocation of WMS1 and WMS2 were approved by IEC and the ER of the Project.

Results and Observations

5.13 According to submission of construction works schedule and location plan under the EP of Project, the commencement of construction work with cofferdam installation / extraction work was 6 December 2023. Marine construction and water quality monitoring was commenced starting from 6 December 2023 and was suspended with effect from 10th February 2025 and shall recommence before the cofferdam works resume.

5.14 Marine construction has been suspended in the reporting month; hence no water quality monitoring was conducted.

5.15 Refer to approved EM&A Manual, construction phase site inspection for water quality mitigation


	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	24
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

measures and check the contractor's work practice on water pollution prevention during construction phase has been conducted during weekly site audit.

- 5.16 During the weekly site audit of this reporting month, no non-conformance water pollution was identified / observed in the commencement works area.

Operation Phase

- 5.17 The baseline marine water monitoring for operation phase has commenced and was conducted on 10th and 24th October 2025 (wet season). The monitoring schedule is provided in **Appendix K**.

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	25
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25


6. WASTE MANAGEMENT

- 6.1 As advised by the Contractor, 0 m³ of inert C&D material was generated in the reporting month. For C&D wastes, 4.13 tonnes of general refuse was disposed of at NENT landfill, 0 kg waste were collected by recycling contractors, and 0 kg of chemical wastes was collected by licensed Contractors in the reporting period.
- 6.2 The actual amounts of different types of waste generated by the activities of the Project in the reporting period are shown in **Table 6-1**, the detailed monthly summary of waste flow is detailed in **Appendix L**.

Table 6-1 Summary of Waste Flow Table

Waste Type	Quantity	Disposal/ Reuse Locations
Inert C&D Waste Disposed as Public Fill	0 m ³	Tseung Kwan O Area 137 Fill Bank (TKO137FB).
Non-inert C&D Wastes	4.13 tonnes	North East New Territories (NENT)
Recycle Materials	0 kg	Recycling Facilities
General Refuse	0 kg	North East New Territories (NENT)
Chemical Waste	0 kg	Licensed Contractors

- 6.3 During regular site auditing, the mitigation measures proposed in the Implementation Schedule of the Environmental Mitigation Measures (EMIS) in the approved EIA report of the Project has been effectively implemented in the commenced works area. No adverse waste impact was observed from the construction works in reporting month.

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	26
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25


7. ENVIRONMENTAL SITE INSPECTION AND AUDIT

Site Inspection

- 7.1 Site inspections were carried out by ET on a weekly basis to monitor the implementation of proper environmental pollution control and mitigation measures for the Project. Key observations were recorded in the site inspection checklist and passed to the Contractor together with the appropriate recommended mitigation measures where necessary.
- 7.2 In the reporting period, 5 site inspections were carried out on 2, 9, 16, 23 & 30 October 2025. No noncompliance was recorded during the site inspection. Details of observations recorded during the site inspections are presented in **Table 7-1**.

Table 7-1 Observations and Recommendations in the Reporting Month

Date	Parameters	Observations and Recommendations	Action was taken by the contractor
2 October 2025	Water Quality	Reminder Item 1: The Contractor is reminded to properly enclose all stockpiles with tarpaulin sheets and arrange sandbags with good condition around the perimeter to prevent muddy water discharge. (repeated)	Follow up Reminder Item 1: Sand bags and tarpaulin sheets have been provided to prevent muddy water discharge. (Item closed)
9 October 2025	-	-	-
16 October 2025	-	-	-
23 October 2025	-	-	-
30 October 2025	-	-	-
No adverse observation was identified in the reporting period.		Noise Impact	
No adverse observation was identified in the reporting period.		Ecology	
No adverse observation was identified in the reporting period.		Fisheries	
No adverse observation was identified in the reporting period.		Built Heritage	
No adverse observation was identified in the reporting period.		Landscape and Visual Impact	
No adverse observation was identified in the reporting period.		Miscellaneous	

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	27
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

Status of Environmental Licenses, Notification and Permits

7.3 The environmental licenses and permits for the Project and valid in the reporting period are summarized in **Table 7-2**. A construction noise permit was applied for the Po Toi O Sewage Treatment Plant and the details are shown in Table 7-2 below.

Table 7-2 Status of Environmental License, Notification and Permit

License/ Notification/ Permit	Reference No.	Valid Period	
		From	To
Environmental Permit	EP-516/2016	27 January 2017	End of Project
Construction Dust Notification Under APCO	458613	3 August 2020	N/A
Wastewater Discharge License	WT00038707- 2021	3 November 2021	30 September 2026
Chemical Waste Producer Registration	5213-820- C3510- 18	23 August 2020	N/A
Billing Account for Disposal of Construction Waste	7038102	17 August 2020	N/A
Construction Noise Permit	GW-RE0886-25	6 August 2025	30 January 2026


Implementation Status on Environmental Protection Requirements

7.4 The Implementation Schedule of the Environmental Mitigation Measures (EMIS) of the reporting period is summarized in **Appendix M**. The implementation of the key mitigation measures during the reporting period is presented in **Appendix N**.

Summary of Complaints, Notification of Summons, Successful Prosecutions and Public Engagement Activities

7.5 No complaints, notification of summons and successful prosecution was received in the reporting period. No public engagement activity was conducted in the reporting month.

7.6 Statistics on complaints, notifications of summons, successful prosecutions and public engagement activities are summarized in **Appendix O**.

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	28
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

8. FUTURE KEY ISSUES

CONSTRUCTION PROGRAMME FOR THE UPCOMING REPORTING MONTH

8.1 Major activities in the upcoming month:


- a. Construction of village sewer;
- b. TBM;
- c. E&M for Po Toi O Sewage Treatment Plant

Reinstatement Works Key Issues for the Upcoming Reporting Month

- 8.2 Potential environmental impacts due to the construction activities, including air quality, noise, water quality, waste, landscape and visual, will be monitored or reviewed. The ET will continue to implement the environmental monitoring & audit programme in accordance with the EM&A Manual and Environmental Permit requirement. The recommended environmental mitigation measures shall be implemented on site and regular inspections as required will be carried out to ensure that the environmental conditions are acceptable.
- 8.3 The anticipated impact of major work activities within the site and the recommended mitigation measures are shown in **Appendix N**.

Monitoring Schedule for the Coming Month

- 8.4 The tentative schedule for environmental monitoring in November 2025 is provided in **Appendix F**.

	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	29
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

9. CONCLUSION

General

9.1 This Report Summarized the Monitoring Results and Audits Findings of the EM&A Programme Under the EP of The Project and In Accordance with the EM&A Manual During the Reporting Period of 1 October 2025 to 31 October 2025.

Environmental Impact Monitoring

9.2 No Action or Limit Level exceedance of construction air quality, noise was recorded in the reporting month. No air quality complaints and noise complaints were received in the reporting month.

Environmental Site Inspections

9.3 The environmental site inspections were carried out in the reporting month. Recommendations on remedial actions were given to the contractors for the deficiencies identified during the site inspection. The contractor had been follow-up the recommendations on the remedial action accordingly.

Complaint Log

9.4 No complaints, notification of summons and successful prosecution was received in the reporting period. No public engagement activity was conducted in the reporting month.

Reporting Changes

9.5 No report changes in this reporting period.

Notifications of Summons and Successful Prosecutions

9.6 There was no notification of summons and successful prosecution was received in the reporting period.


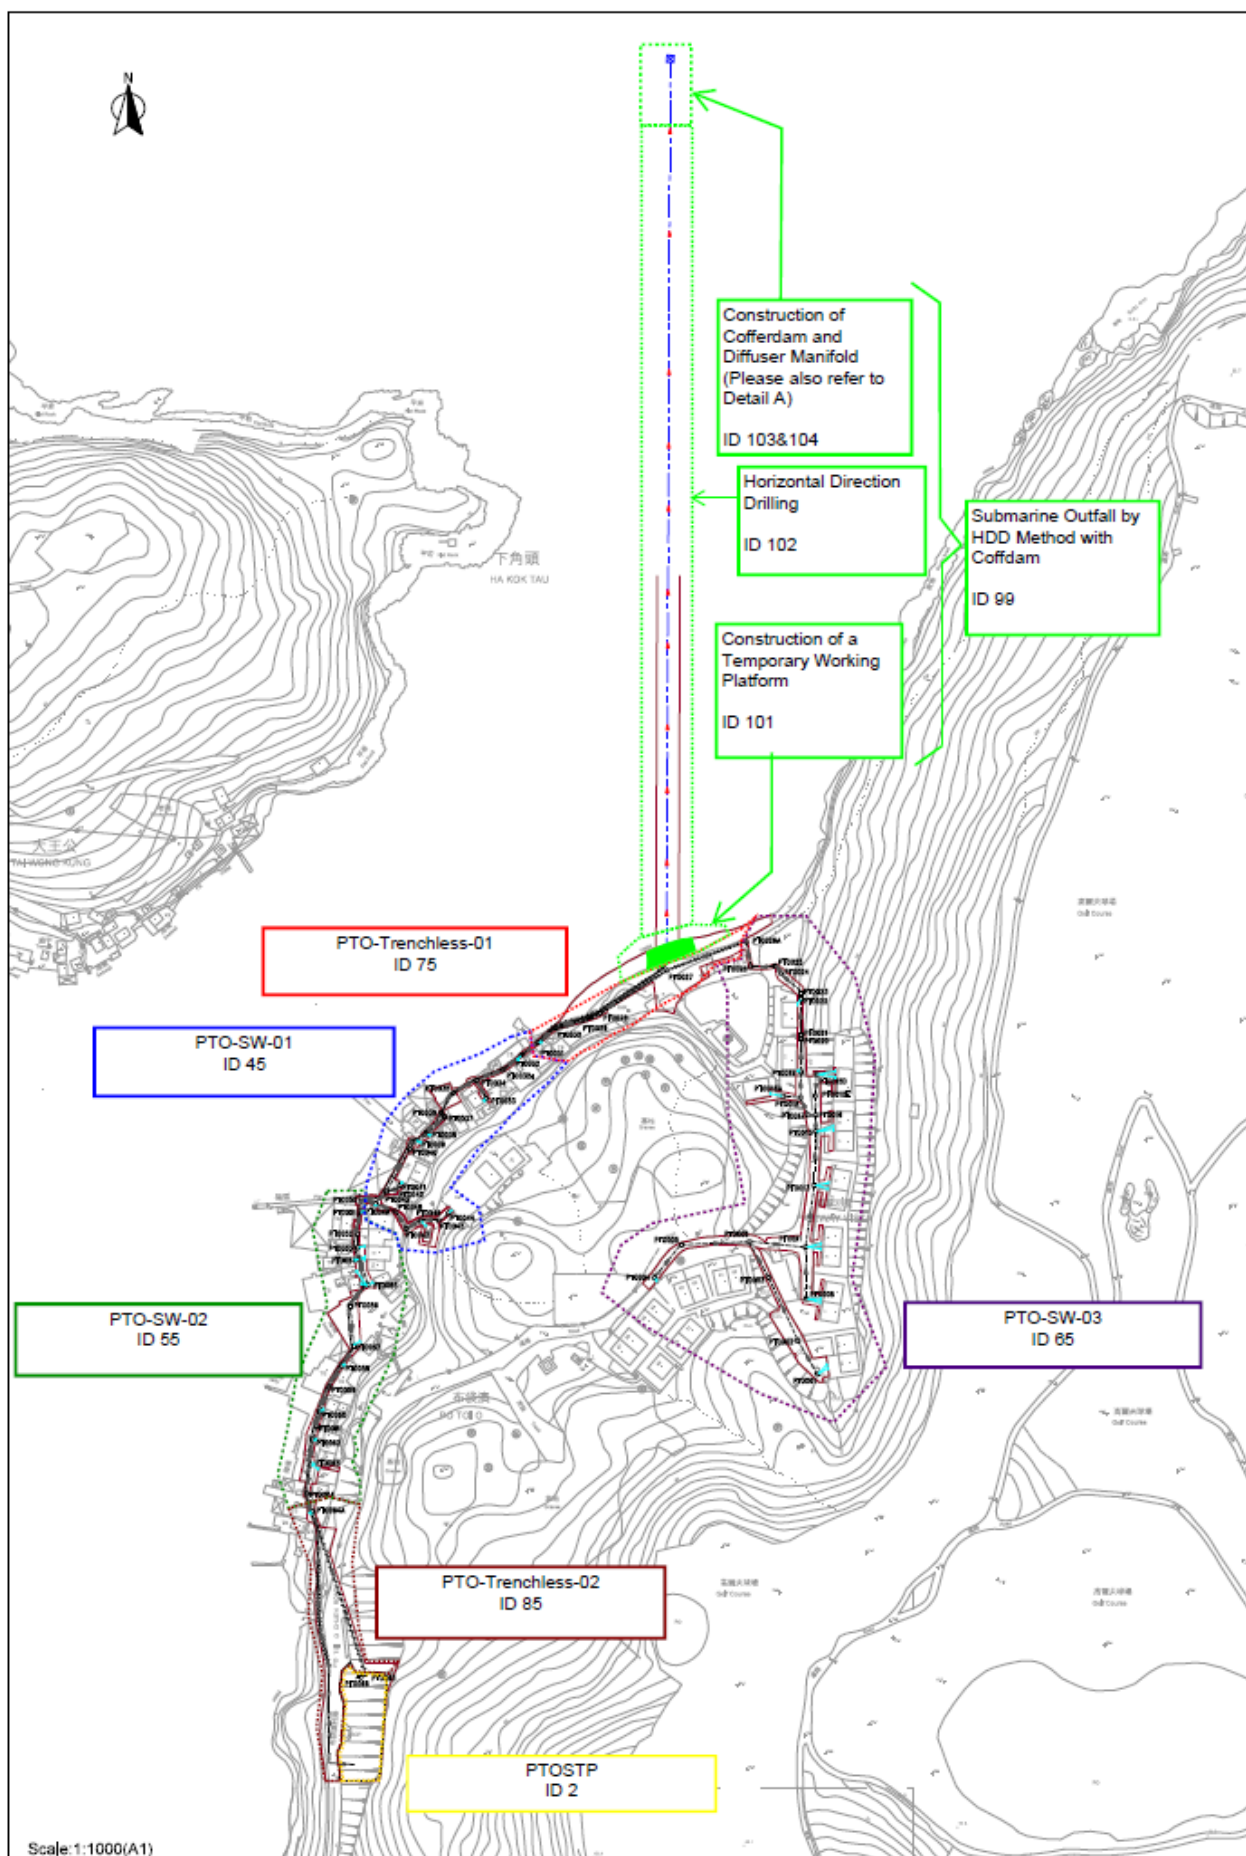
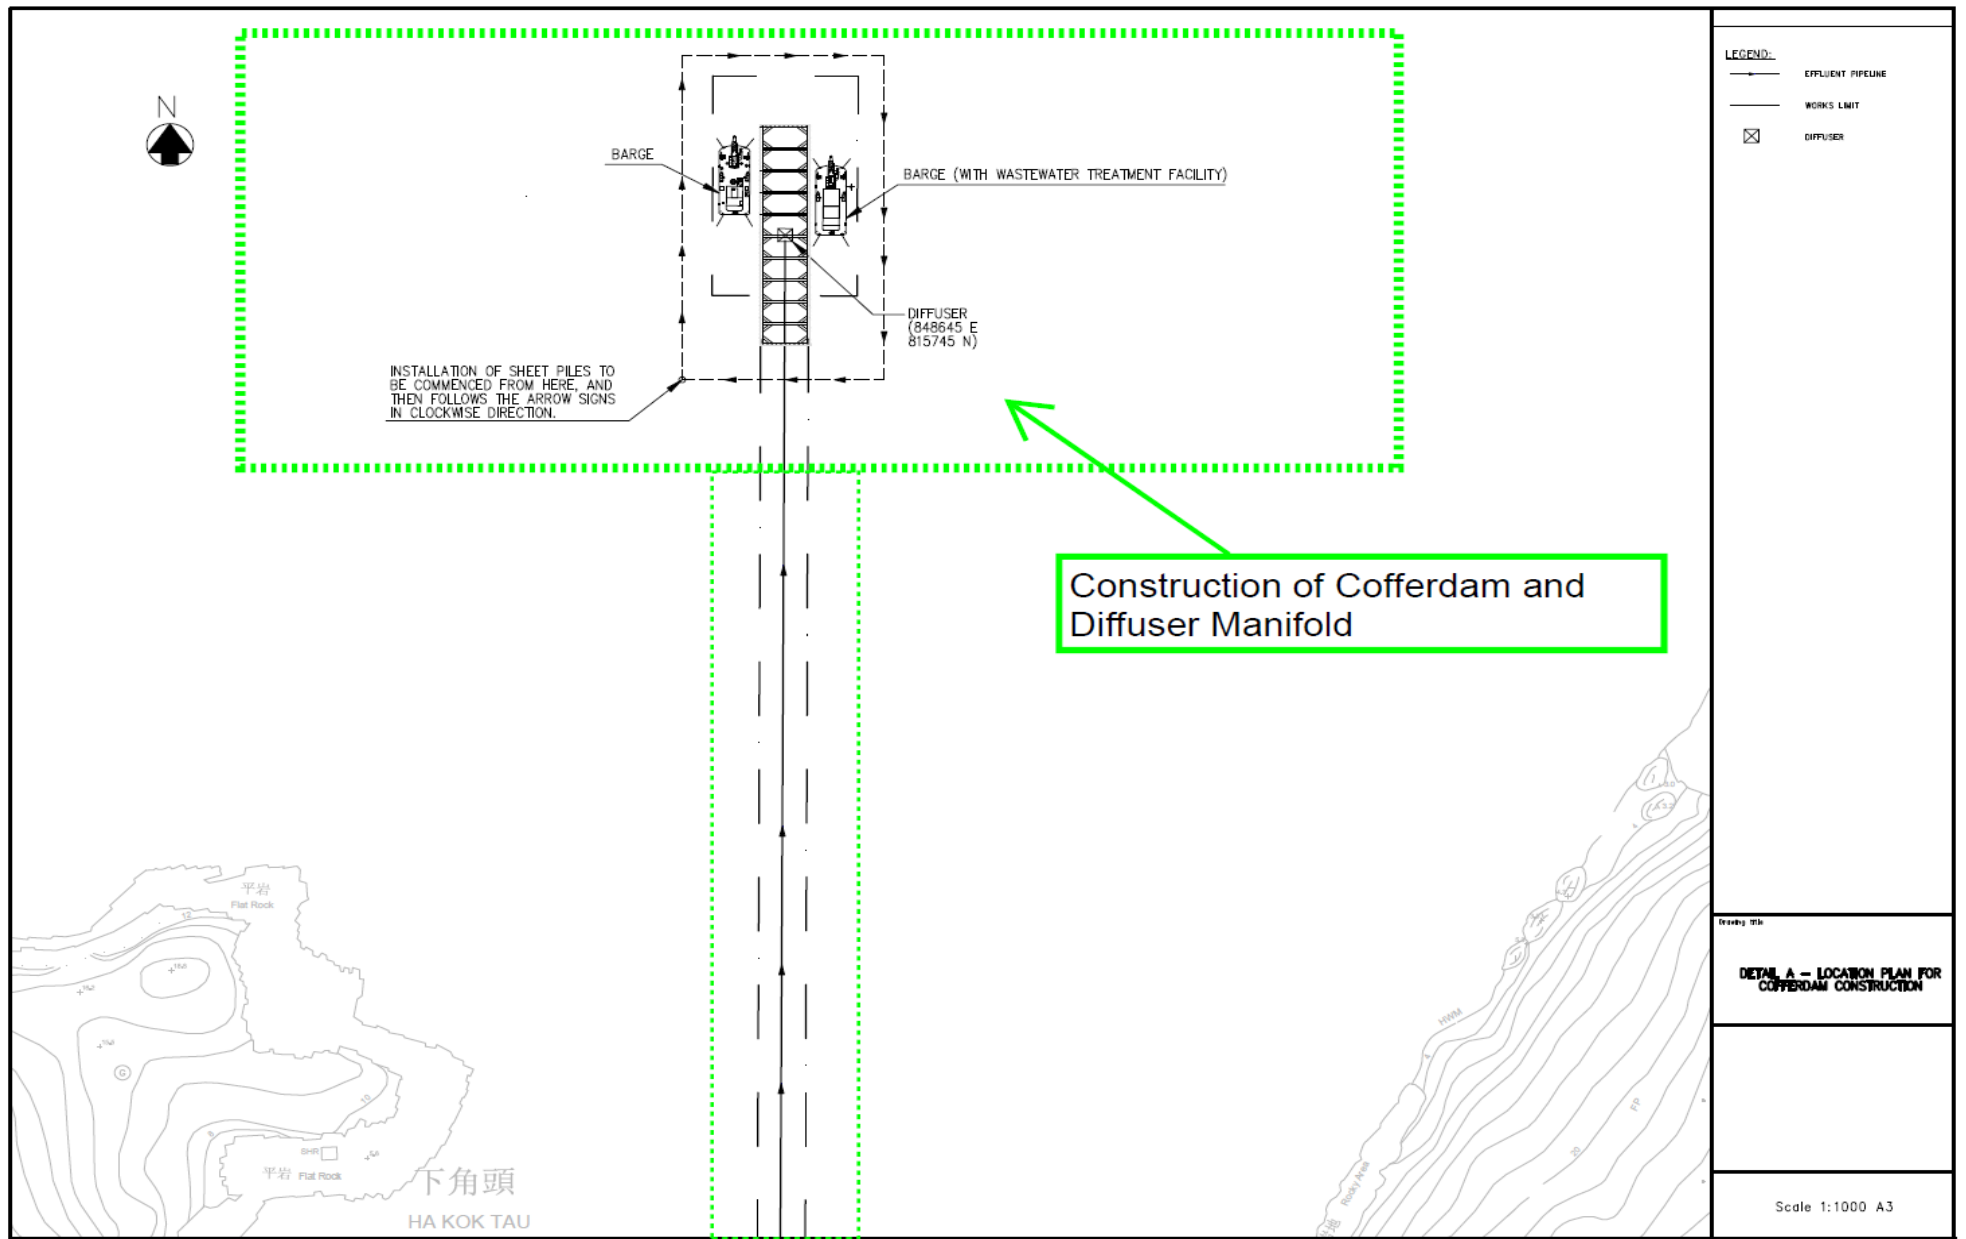
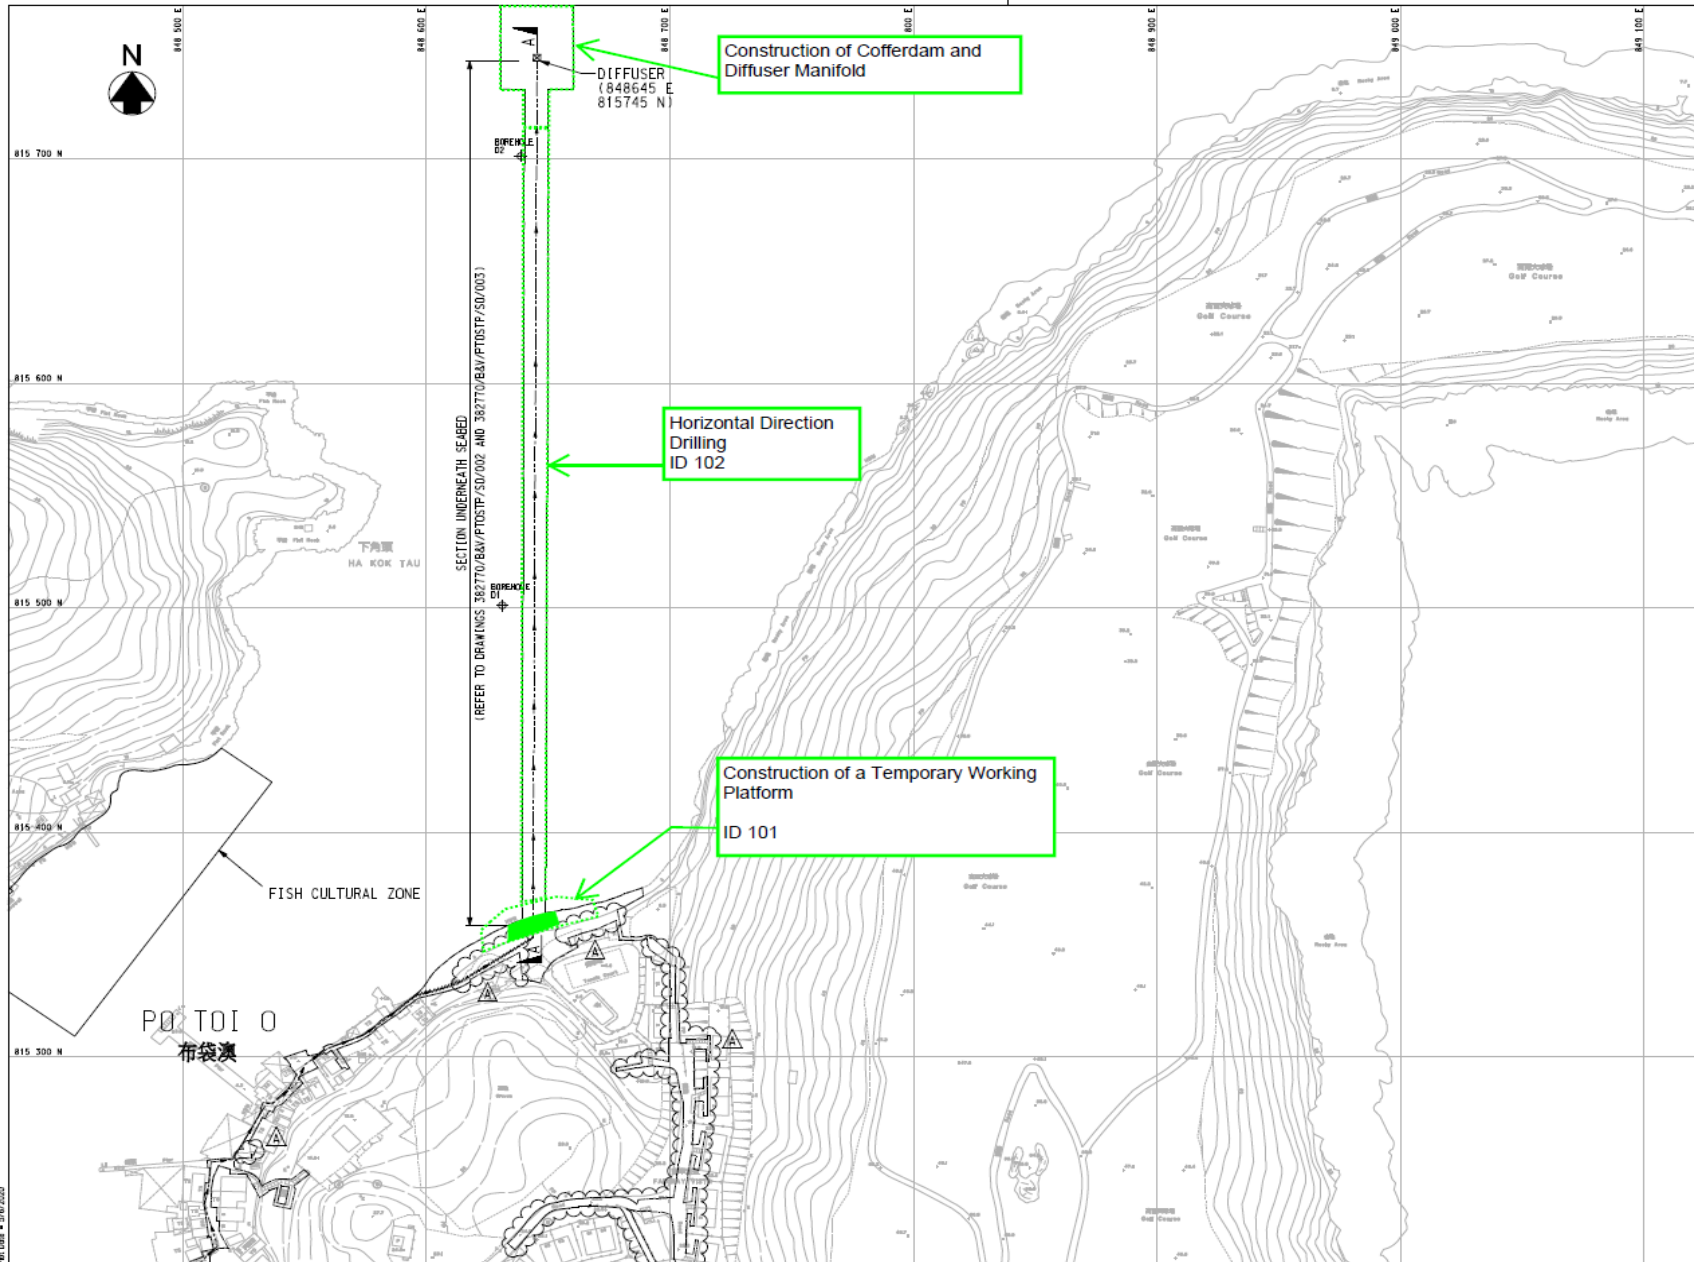
	EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O	Page	-
		Ref#	EMA2403/03/58
	Monthly EM&A Report	Rev.	01
		Date	Nov 25

FIGURE 2-1 – LAYOUT PLAN OF THE CAPTIONED PROJECT







© Copyright by Black & Veatch Hong Kong Limited

NOTES:
1. FOR GENERAL NOTES, REFER TO 382770/B&V/GN/000.

LEGEND:
 - - - - - EFFLUENT PIPELINE
 ~~~~~~ FINAL EFFLUENT PIPELINE BY TRENCHLESS METHOD  
 ——— WORKS LIMIT

| Revision | Date  | Designed | Checked | Drawn | Initial |
|----------|-------|----------|---------|-------|---------|
| Initial  | 03/20 | WC       | NL      | SZ    | CC      |
| Date     | 03/20 | 03/20    | 03/20   | 03/20 | 03/20   |

Approved

Contract no. **DC2018/09**

Contract title  
**PROVISION OF VILLAGE SEWERAGE IN SAI KUNG**


Drawing title  
**PO TOI O - PROPOSED SUBMARINE OUTFALL LAYOUT PLAN**

Drawing no. **382770/B&V/PT05TP/SD/001** Revision **A**

Scale **A1 1 : 1000**  
**A3 1 : 2000**

**香港特別行政區政府渠務署**  
**THE GOVERNMENT OF THE HONG KONG SPECIAL ADMINISTRATIVE REGION**  
**SEWERAGE SERVICES DEPARTMENT**

**BLACK & VEATCH HONG KONG LIMITED**  
**博通工程顧問有限公司**

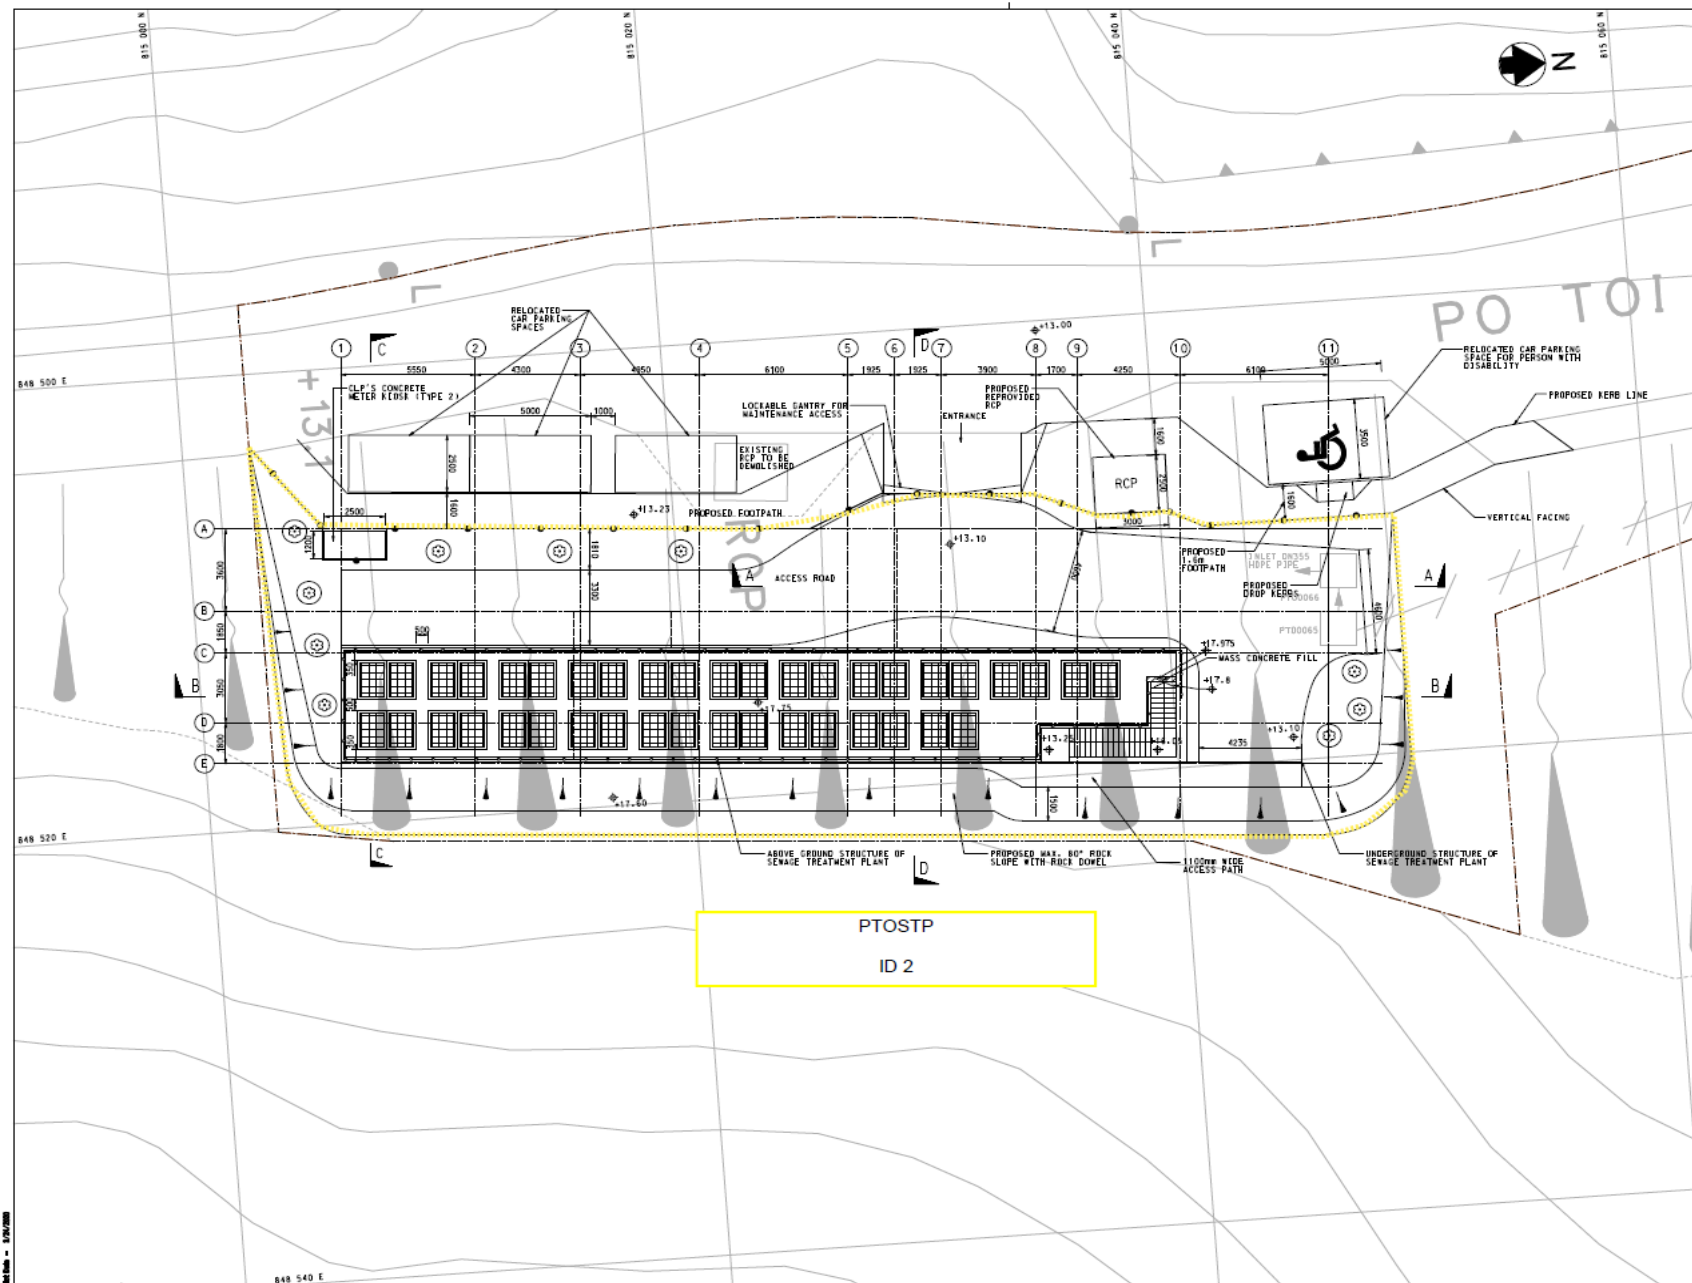







© Copyright by Black & Veatch Hong Kong Limited

NOTES:

- NOTES:
1. FOR OTHER NOTES AND LEGEND, REFER TO DRAWING NO. 382770/B&X/GM/000.
  2. ALL LEVELS ARE IN METERS ABOVE PRINCIPAL DATUM (HPD).
  3. ALL DIMENSIONS ARE IN METERS UNLESS OTHERWISE SPECIFIED.

**LEGEND:**

-  PROPOSED 3m HEIGHT FENCE WALL  
 PROPOSED TREE  
 PROPOSED CUT SLOPE  
 BOUNDARY FENCE (REFER TO ARCHITECTURAL DRAWINGS FOR THE TYPES AND DETAILS)  
 WORKS LIMIT  
 STAINLESS STEEL RAILINGS

|          |          |             |       |         |         |
|----------|----------|-------------|-------|---------|---------|
| Revision | Date     | Description |       |         | Initial |
|          | Designed | Checked     | Drawn | Checked |         |
| Initial  | WC       | WL          | SZ    | CC      |         |
| Date     | 03/20    | 03/20       | 03/20 | 03/20   |         |

|          |  |
|----------|--|
| Date     |  |
| Approved |  |

Contract no.

DC/2019/09

|                |  |
|----------------|--|
| Contract title |  |
|----------------|--|

PROVISION OF VILLAGE SEWERAGE  
IN SAI KUNG

Drawing title

GENERAL ARRANGEMENT OF  
PO TOI O SEWAGE TREATMENT PLANT  
- GENERAL LAYOUT

Drawing No.

382770/B&amp;V/PTOSTP/GA/00

Revised 08/10


1.

Scale

|            |
|------------|
| AI 1 : 100 |
| AS 1 : 200 |




BLACK & VEATCH HONG KONG LIMITED  
 黑域工程顧問有限公司


|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | -             |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |

**FIGURE 3–1 PROPOSED AIR QUALITY AND NOISE MONITORING STATIONS LOCATIONS**

---




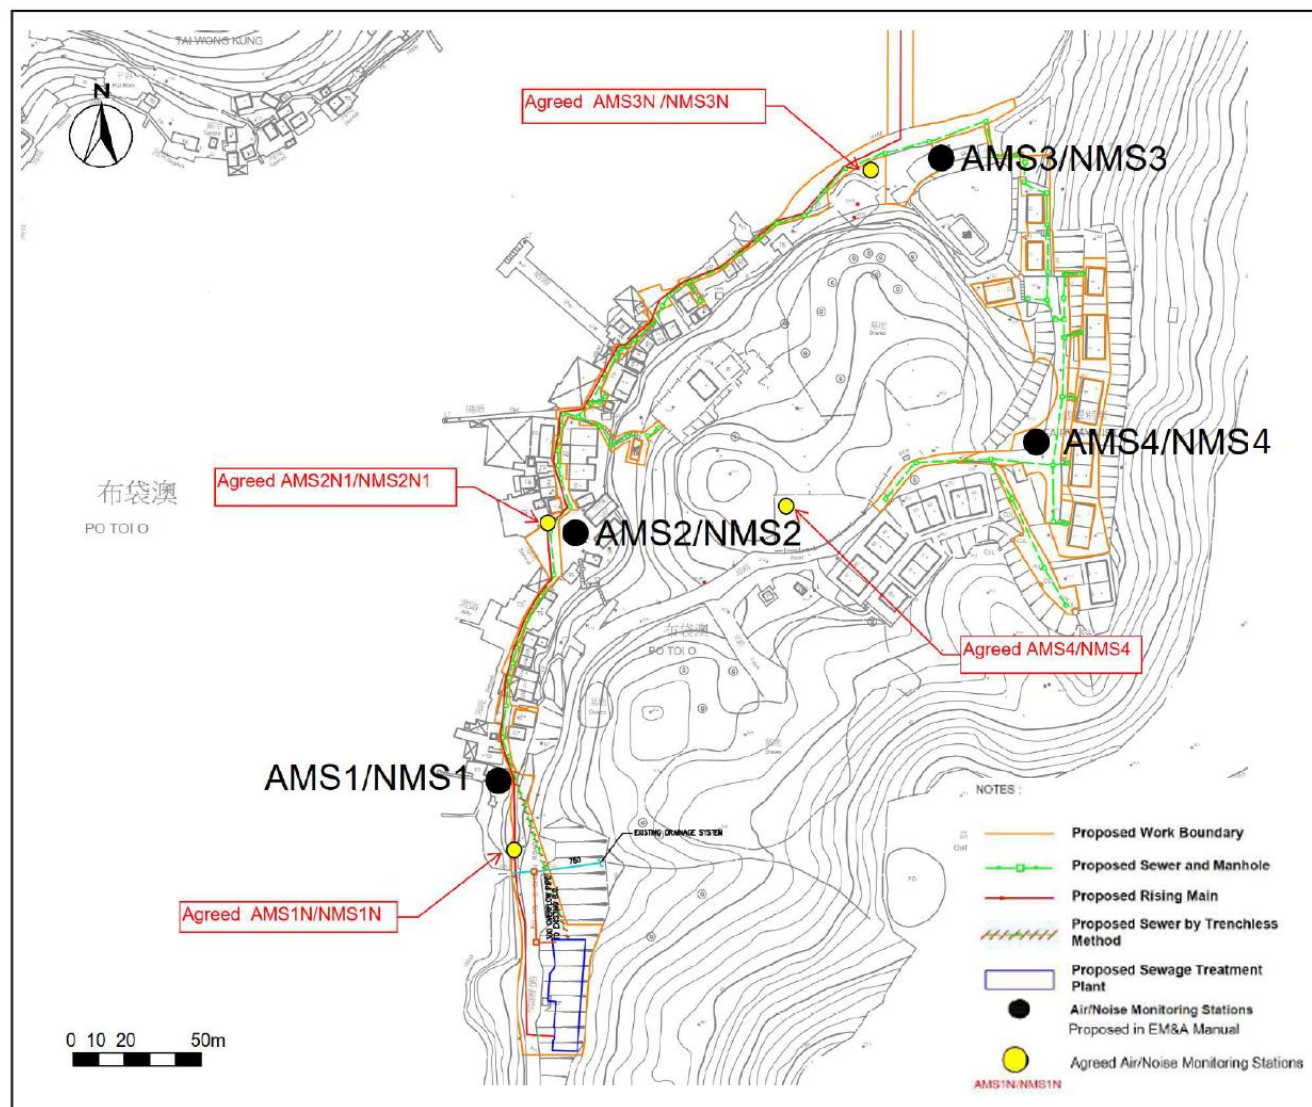


|   |                                                                                   |                                                                          |      |               |
|---|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|------|---------------|
| 9 |  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O | Page | -             |
|   |                                                                                   |                                                                          | Ref# | EMA2403/03/58 |
|   |                                                                                   | Monthly EM&A Report                                                      | Rev. | 01            |
|   |                                                                                   |                                                                          | Date | Nov 25        |

**FIGURE 5–1 LOCATIONS OF WATER QUALITY IMPACT MONITORING STATIONS**

---

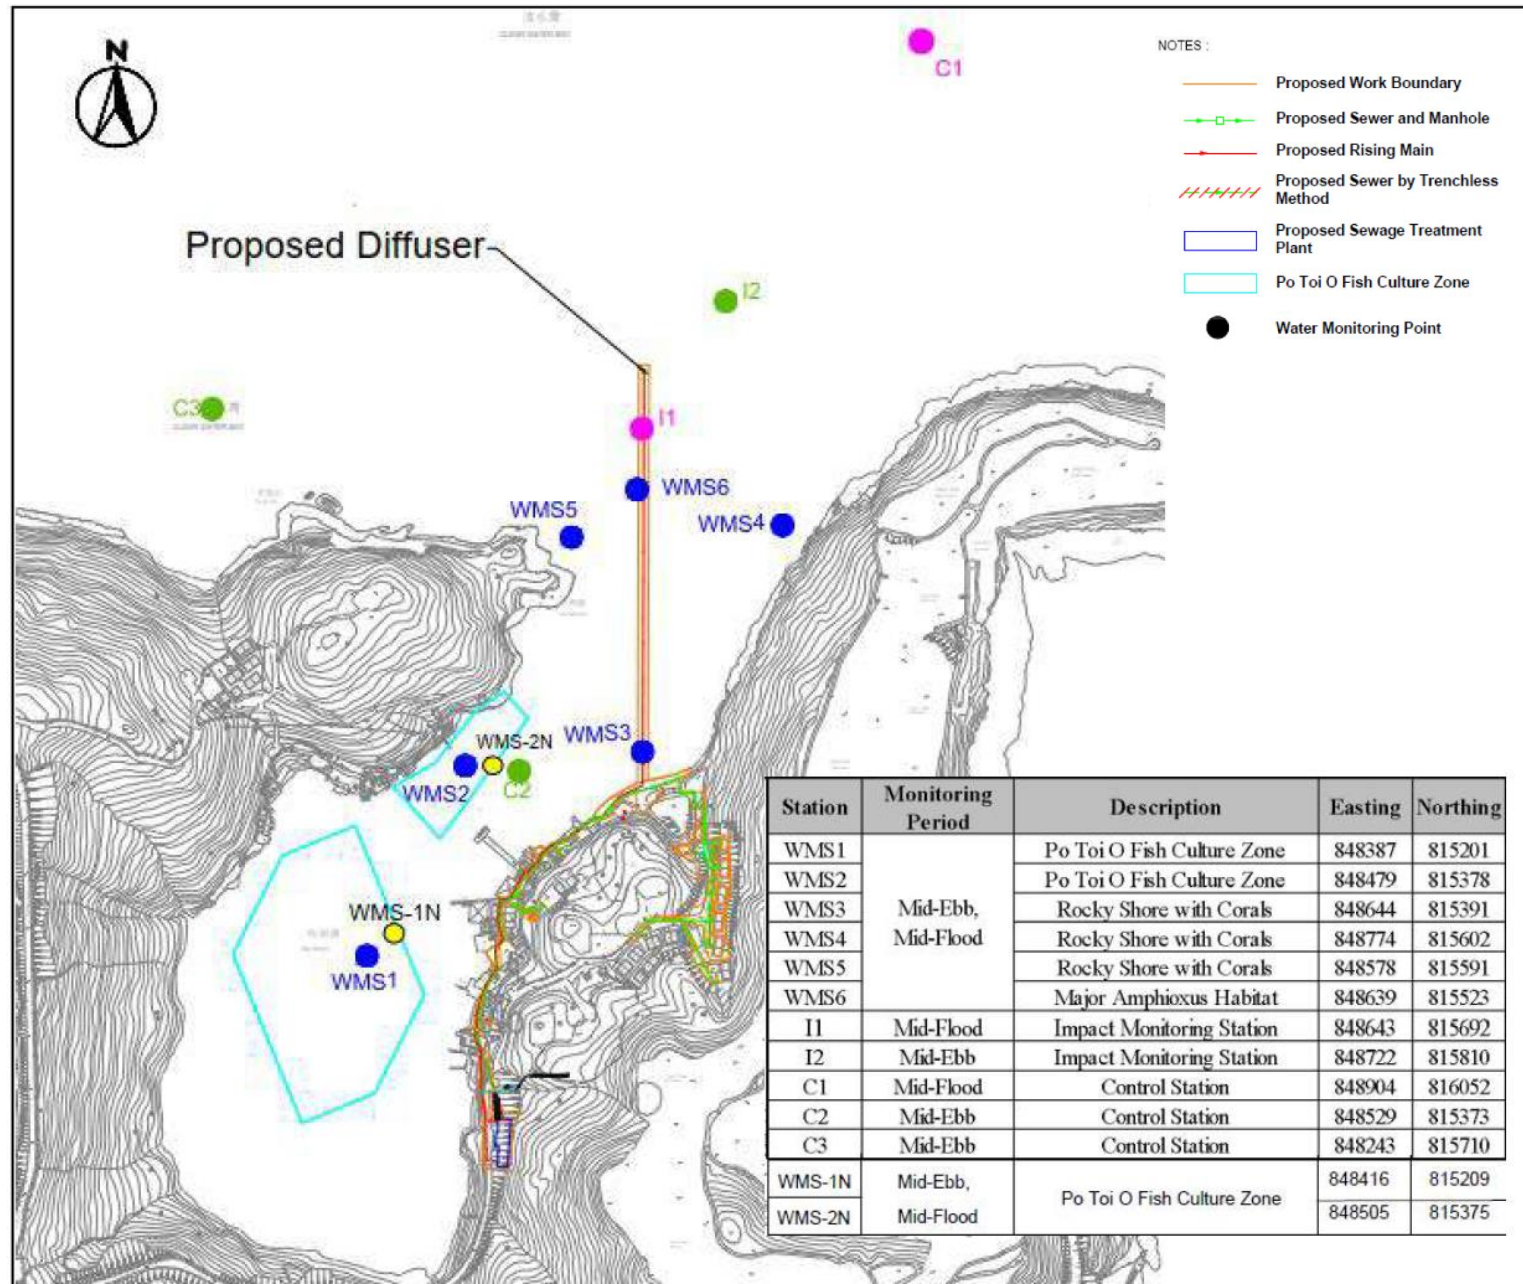




|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | A-1           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |

## APPENDIX A – PROJECT ORGANIZATION CHART

---


|                                                                                   |                                                                          |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O | Page | A-2           |
|                                                                                   |                                                                          | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      | Rev. | 01            |
|                                                                                   |                                                                          | Date | Nov 25        |


Contract No. : DC/2019/09  
Provision of Village Sewerage in Sai Kung

Appendix 1

**Environmental Organization Chart**

Revision : Rev. 45  
Date : 7-May-24

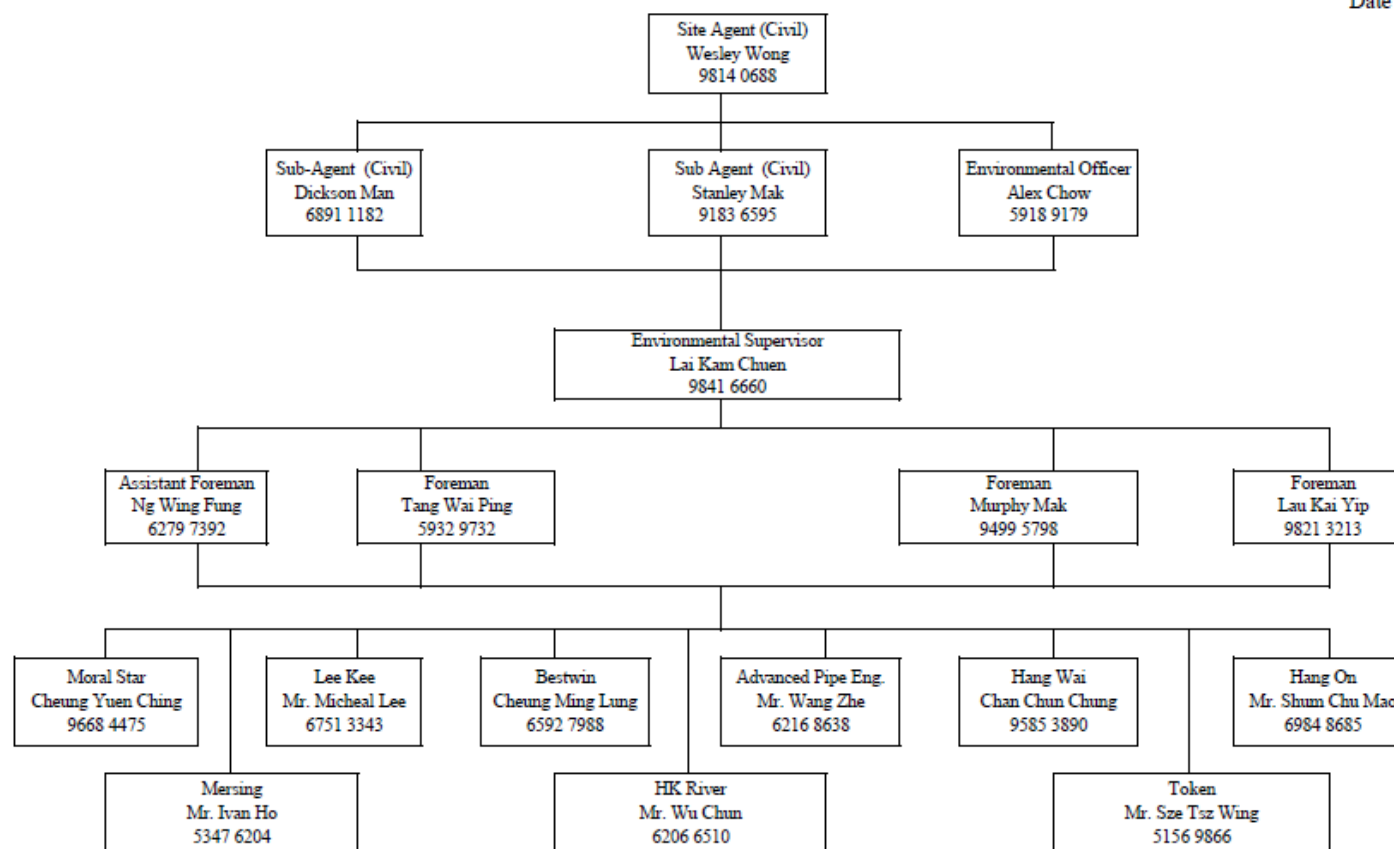

|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | B-1           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |


## APPENDIX B – CONSTRUCTION PROGRAMME

---

Page 1





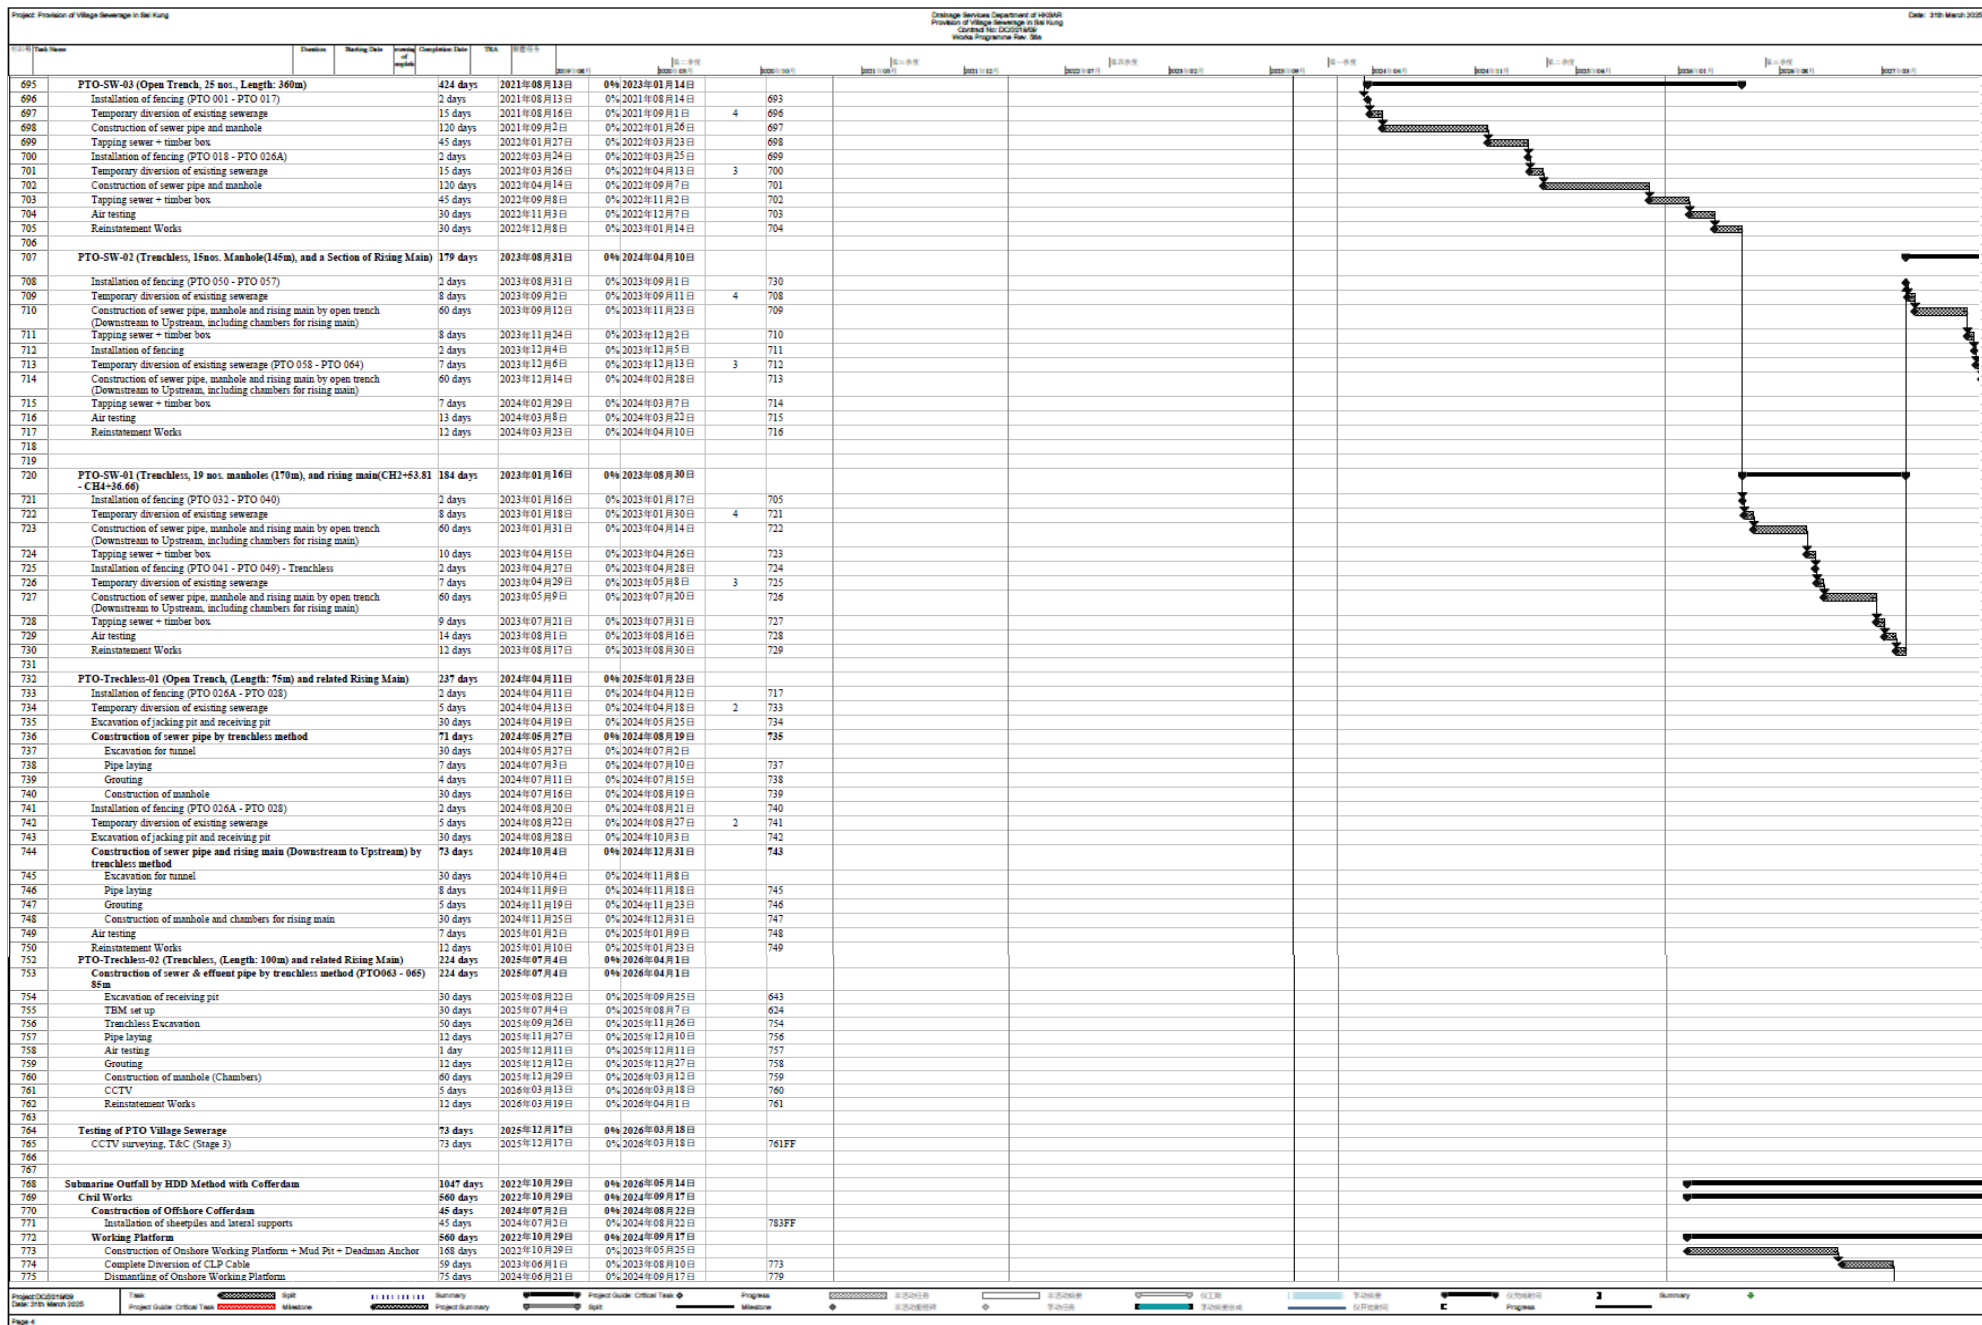







|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | C-1           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |

## APPENDIX C – METEOROLOGICAL DATA


---

|                                                                                   |                                                                          |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  | Page | C-2           |
|                                                                                   |                                                                          |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  | Rev. | 01            |
|                                                                                   |                                                                          |  | Date | Nov 25        |

### October 2025 Meteorological data

| Day                    | Hong Kong Observatory |                             |               |                             |                         |                            |                          |                     | King's Park                   | Waglan Island^                      |                        |
|------------------------|-----------------------|-----------------------------|---------------|-----------------------------|-------------------------|----------------------------|--------------------------|---------------------|-------------------------------|-------------------------------------|------------------------|
|                        | Mean Pressure (hPa)   | Air Temperature             |               |                             | Mean Dew Point (deg. C) | Mean Relative Humidity (%) | Mean Amount of Cloud (%) | Total Rainfall (mm) | Total Bright Sunshine (hours) | Prevailing Wind Direction (degrees) | Mean Wind Speed (km/h) |
|                        |                       | Absolute Daily Max (deg. C) | Mean (deg. C) | Absolute Daily Min (deg. C) |                         |                            |                          |                     |                               |                                     |                        |
| 1                      | 1012.2                | 33.6                        | 29.8          | 27.7                        | 24.3                    | 73                         | 50                       | 0                   | 10.7                          | ***                                 | ***                    |
| 2                      | 1012.9                | 32.5                        | 29.5          | 27.9                        | 24.7                    | 76                         | 43                       | Trace               | 10.9                          | ***                                 | ***                    |
| 3                      | 1012.5                | 33.4                        | 29.7          | 27.8                        | 24.4                    | 73                         | 43                       | 0                   | 10.1                          | ***                                 | ***                    |
| 4                      | 1010.6                | 33.4                        | 29.6          | 27.5                        | 23.5                    | 70                         | 60                       | 0.6                 | 6.9                           | ***                                 | ***                    |
| 5                      | 1010.8                | 29.9                        | 28.8          | 27.8                        | 25.1                    | 81                         | 88                       | 1                   | 1.3                           | ***                                 | ***                    |
| 6                      | 1013.1                | 31                          | 28.6          | 27.3                        | 25                      | 81                         | 68                       | 0.6                 | 5.3                           | ***                                 | ***                    |
| 7                      | 1013.6                | 32.7                        | 29.3          | 26.7                        | 23.6                    | 72                         | 34                       | 0                   | 10                            | ***                                 | ***                    |
| 8                      | 1012.8                | 33.1                        | 30            | 28                          | 23.9                    | 71                         | 47                       | 0                   | 9.7                           | ***                                 | ***                    |
| 9                      | 1012.5                | 32.7                        | 29.8          | 28.4                        | 24.3                    | 73                         | 36                       | Trace               | 9.9                           | ***                                 | ***                    |
| 10                     | 1012.1                | 32.1                        | 29.2          | 27.8                        | 24.2                    | 75                         | 56                       | 0.1                 | 6.1                           | ***                                 | ***                    |
| 11                     | 1011.4                | 32.5                        | 29.5          | 28                          | 24.6                    | 75                         | 54                       | 0                   | 10.1                          | ***                                 | ***                    |
| 12                     | 1011.8                | 29.1                        | 28.3          | 26.6                        | 25.5                    | 85                         | 83                       | 15.7                | 1.7                           | ***                                 | ***                    |
| 13                     | 1012.8                | 31                          | 28.7          | 27.1                        | 25.7                    | 84                         | 75                       | 3.8                 | 8                             | ***                                 | ***                    |
| 14                     | 1013.3                | 32                          | 29.1          | 26.7                        | 25.3                    | 80                         | 55                       | 5.5                 | 9.7                           | ***                                 | ***                    |
| 15                     | 1013.4                | 32.8                        | 29.7          | 27.6                        | 24                      | 73                         | 31                       | 0                   | 10.3                          | ***                                 | ***                    |
| 16                     | 1013.8                | 32                          | 29.6          | 28.3                        | 23.9                    | 72                         | 43                       | 0                   | 8.9                           | ***                                 | ***                    |
| 17                     | 1014                  | 32.2                        | 29.6          | 28.1                        | 24                      | 72                         | 49                       | 0                   | 8.6                           | ***                                 | ***                    |
| 18                     | 1012.6                | 32.8                        | 29.9          | 28.3                        | 24.8                    | 74                         | 48                       | 0                   | 9.5                           | ***                                 | ***                    |
| 19                     | 1011.5                | 32.9                        | 30.1          | 28.2                        | 23.1                    | 67                         | 66                       | 0                   | 7                             | ***                                 | ***                    |
| 20                     | 1011.8                | 29                          | 26.8          | 23.7                        | 19.9                    | 66                         | 87                       | Trace               | 3                             | ***                                 | ***                    |
| 21                     | 1014.4                | 24                          | 22.4          | 20.4                        | 16.6                    | 70                         | 94                       | 0.1                 | 0.1                           | ***                                 | ***                    |
| 22                     | 1016.4                | 20.9                        | 19.2          | 18.2                        | 14.8                    | 76                         | 92                       | 3.3                 | 0                             | ***                                 | ***                    |
| 23                     | 1017.2                | 22.8                        | 20.8          | 18.7                        | 14.1                    | 65                         | 88                       | 0                   | 0.2                           | ***                                 | ***                    |
| 24                     | 1016.4                | 26.4                        | 23.3          | 21.1                        | 15.1                    | 60                         | 88                       | Trace               | 3.8                           | ***                                 | ***                    |
| 25                     | 1015.5                | 29                          | 25.6          | 23.2                        | 17.2                    | 60                         | 82                       | Trace               | 6.9                           | ***                                 | ***                    |
| 26                     | 1015.6                | 29.2                        | 26.5          | 24.2                        | 17.2                    | 57                         | 79                       | 0                   | 9.1                           | ***                                 | ***                    |
| 27                     | 1016.9                | 26.1                        | 24.6          | 22.9                        | 17                      | 63                         | 88                       | Trace               | 0                             | ***                                 | ***                    |
| 28                     | 1017.1                | 24.4                        | 23.4          | 21.5                        | 18.4                    | 73                         | 89                       | 0.5                 | 0                             | ***                                 | ***                    |
| 29                     | 1016.7                | 25.5                        | 24.4          | 22.9                        | 19.3                    | 73                         | 90                       | Trace               | 0.5                           | ***                                 | ***                    |
| 30                     | 1016.1                | 28.9                        | 26.3          | 24.8                        | 20.4                    | 70                         | 82                       | Trace               | 5.6                           | ***                                 | ***                    |
| 31                     | 1015.6                | 28.7                        | 26.6          | 25.1                        | 20.1                    | 68                         | 73                       | 0                   | 5.4                           | ***                                 | ***                    |
| Mean/Total             | 1013.8                | 29.9                        | 27.4          | 25.6                        | 21.7                    | 72                         | 66                       | 31.2                | 189.3                         | ***                                 | ***                    |
| Climatological Normal? | 1014                  | 28.1                        | 25.7          | 23.9                        | 20.2                    | 73                         | 58                       | 120.3               | 197.8                         | 80                                  | 26.3                   |

Source: [Daily Extract | Hong Kong Observatory\(HKO\) | Climate Information Service](#)

|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | D-1           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |

## APPENDIX D – AIR QUALITY MONITORING EQUIPMENT CALIBRATION CERTIFICATES

---



東業德勤測試顧問有限公司  
ETS-TESTCONSULT LTD.™

8/F Block B,  
Valestrong Industrial Centre,  
34-36 Au Pui Wan Street,  
Fo Tan, Hong Kong  
T: +852 2895 8316  
F: +852 2895 3944  
E: ets@ets-testconsult.com  
W: www.ets-testconsult.com

TEST REPORT


Internal Calibration Report  
of  
Dust Monitor

Manufacturer : SIBATA (LD-3B) Date of Calibration : 08 September 2025

Serial No. : 014746 (ET/EA/001/06) Calibration Due Date : 07 November 2025

Method : Parallel measurement (Five-point calibration) by placing the Dust Monitor and High Volume Air Sampler together under the same environmental condition

|           |                                         |                                       |     |     |     |     |
|-----------|-----------------------------------------|---------------------------------------|-----|-----|-----|-----|
| Results : | Dust Monitor (CPM)                      | 44                                    | 92  | 148 | 191 | 245 |
|           | TSP (ug/m <sup>3</sup> )                | 51                                    | 102 | 154 | 209 | 258 |
|           | High Volume Air Sampler Serial No.:1180 | Calibration Due Date: 01 October 2025 |     |     |     |     |

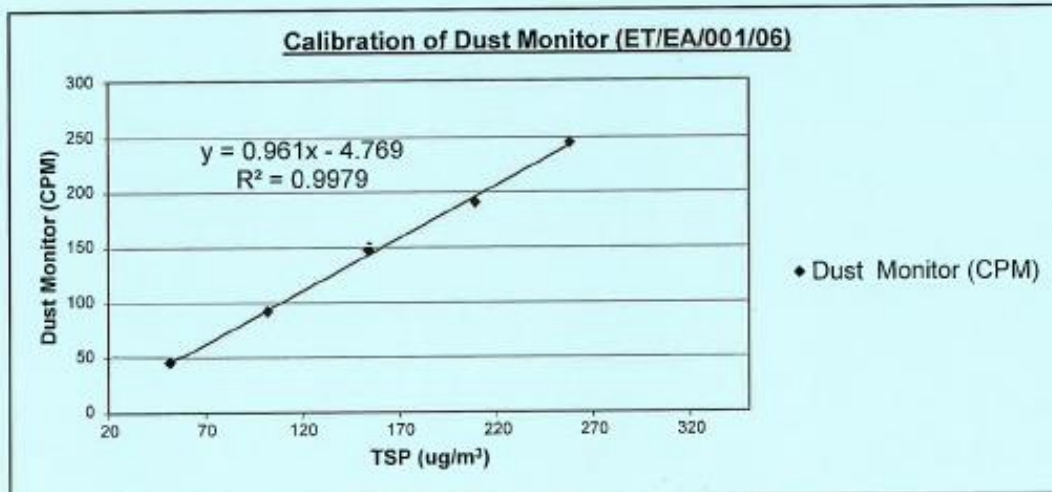

Acceptance Criteria : Correlation coefficient (r) of the calibration curve greater than 0.990 after five-point calibration.

The Dust Trak Monitor complies \* / does not comply \* with the internal calibration procedures and is deemed acceptable \* / unacceptable \* for use.

Calibrated by : Cheng, Hei Man  
(Technician)

Checked by : Guy Kong Ping Ki  
(Laboratory Manager)

- END OF REPORT -



東業德勤測試顧問有限公司  
ETS-TESTCONSULT LTD.


B/F Block B,  
Wenstong Industrial Centre,  
34-36 Au Pui Wan Street,  
Tsing Yi, Hong Kong  
T: +852 2695 8318  
F: +852 2695 3944  
E: ets@ets-testconsult.com  
W: www.ets-testconsult.com

TEST REPORT

Internal Calibration Report  
of  
Dust Monitor

Manufacturer : SIBATA (LD-3B) Date of Calibration : 08 September 2025  
Serial No. : 155331 (ET/EA/001/09) Calibration Due Date : 07 November 2025  
Method : Parallel measurement (Five-point calibration) by placing the Dust Monitor and High Volume Air Sampler together under the same environmental condition


|         |                                          |                                         |     |     |     |     |
|---------|------------------------------------------|-----------------------------------------|-----|-----|-----|-----|
| Results | Dust Monitor (CPM)                       | 76                                      | 117 | 169 | 228 | 271 |
|         | TSP (ug/m <sup>3</sup> )                 | 81                                      | 131 | 186 | 238 | 291 |
|         | High Volume Air Sampler Serial No.: 9795 | Calibration Due Date: 30 September 2025 |     |     |     |     |

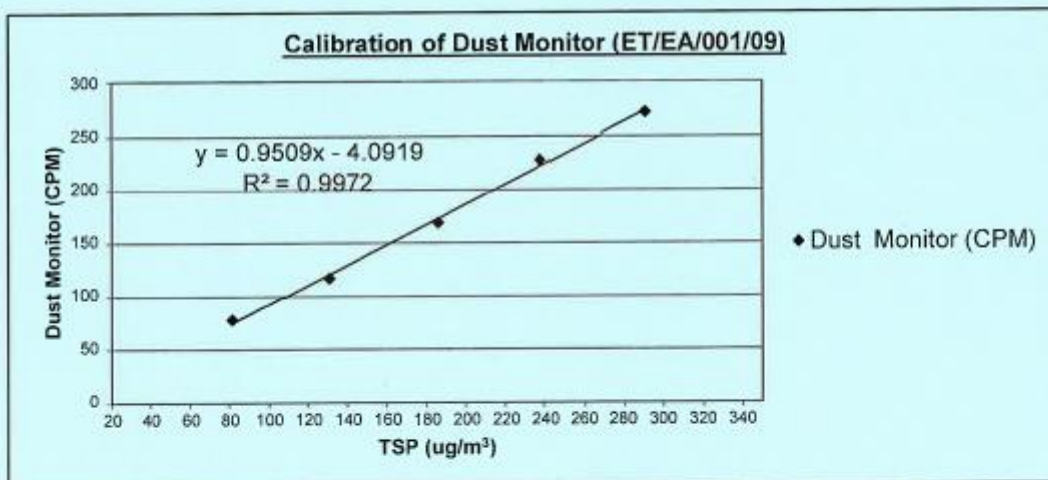

Acceptance Criteria : Correlation coefficient (r) of the calibration curve greater than 0.990 after a five-point calibration

The Dust Trak Monitor complies \* / does not comply \* with the internal calibration procedures and is deemed acceptable \* / unacceptable \* for use.

Calibrated by :   
CHENG, Hei Man  
(Technician)

Checked by :   
Guy Kong Ping Ki  
(Laboratory Manager)

- END OF REPORT -





東業德勤測試顧問有限公司  
**ETS-TESTCONSULT LTD.**

B/F Block B,  
Vongshong Industrial Centre,  
34-36 Au Pui Wan Street,  
Po Tse, Hong Kong

T: +852 2695 8318  
F: +852 2696 3944  
E: ets@ets-testconsult.com  
W: www.ets-testconsult.com

**TEST REPORT**

**Internal Calibration Report**

of

**Dust Monitor**


**Manufacturer :** SIBATA (LD-3B) **Date of Calibration :** 08 September 2025

**Serial No. :** 597340 (ET/EA/001/14) **Calibration Due Date :** 07 November 2025

**Method :** Parallel measurement (Five-point calibration) by placing the Dust Monitor and High Volume Air Sampler together under the same environmental condition

|                  |                                                                                |    |     |     |     |     |
|------------------|--------------------------------------------------------------------------------|----|-----|-----|-----|-----|
| <b>Results :</b> | Dust Monitor (CPM)                                                             | 64 | 111 | 152 | 190 | 244 |
|                  | TSP (ug/m <sup>3</sup> )                                                       | 67 | 116 | 158 | 211 | 261 |
|                  | High Volume Air Sampler Serial No.: 1174 Calibration Due Date: 01 October 2025 |    |     |     |     |     |

**Calibration of Dust Monitor (ET/EA/001/14)**

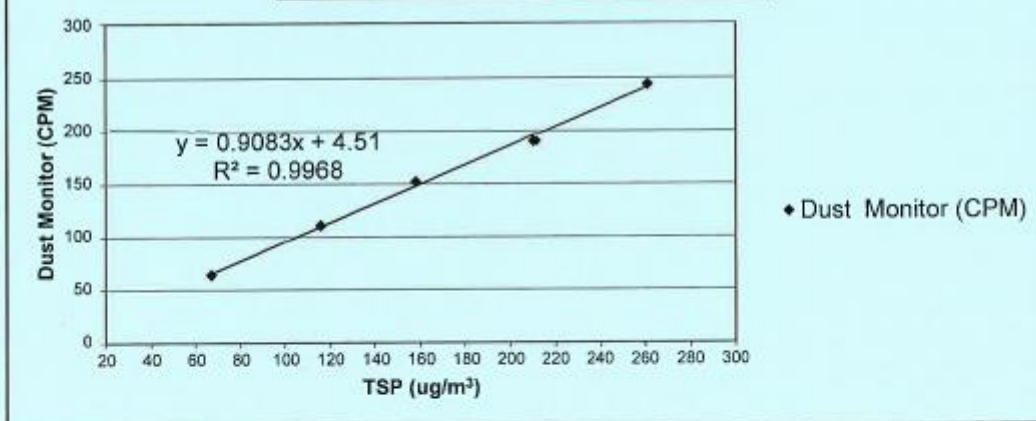

**Acceptance Criteria :** Correlation coefficient (r) of the calibration curve greater than 0.990 after a five-point calibration

The Dust Trak Monitor complies \* / does not comply \* with the internal calibration procedures and is deemed acceptable \* / unacceptable \* for use.

Calibrated by : CHENG, Hei Man  
(Technician)

Checked by : Guy Kong Ping Ki  
(Laboratory Manager)

- END OF REPORT -



東業德勤測試顧問有限公司  
**ETS-TESTCONSULT LTD.**

8/F Block B,  
Verisstrong Industrial Centre,  
34-38 Au Pui Wan Street,  
Fo Tan, Hong Kong  
T: +852 2895 8318  
F: +852 2895 3944  
E: ets@ets-testconsult.com  
W: www.ets-testconsult.com

**TEST REPORT**

**Internal Calibration Report  
of  
Dust Monitor**

**Manufacturer :** SIBATA (LD-3B) **Date of Calibration :** 08 September 2025


**Serial No. :** 597227 (ET/EA/001/15) **Calibration Due Date :** 07 November 2025

**Method :** Parallel measurement (Five-point calibration) by placing the Dust Monitor and High Volume Air Sampler together under the same environmental condition

**Results :**

|                                          |    |                                       |     |     |     |
|------------------------------------------|----|---------------------------------------|-----|-----|-----|
| Dust Monitor (CPM)                       | 75 | 115                                   | 157 | 195 | 239 |
| TSP (ug/m <sup>3</sup> )                 | 89 | 122                                   | 167 | 213 | 256 |
| High Volume Air Sampler Serial No.: 2483 |    | Calibration Due Date: 01 October 2025 |     |     |     |

**Calibration of Dust Monitor (ET/EA/001/15)**

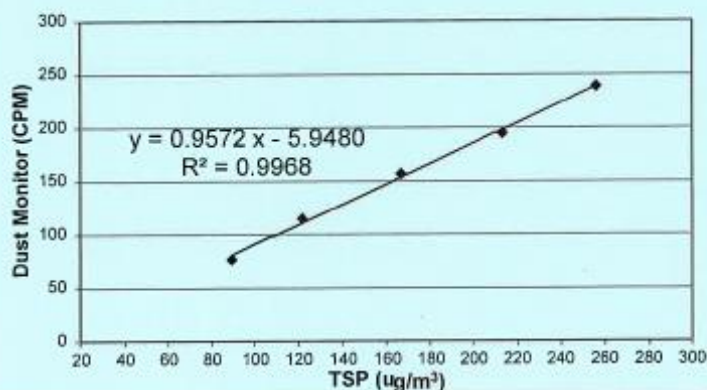

**Acceptance Criteria :** Correlation coefficient (r) of the calibration curve greater than 0.990 after a five-point calibration

The Dust Trak Monitor complies \* / does not comply \* with the internal calibration procedures and is deemed acceptable \* / unacceptable \* for use.

Calibrated by : CHENG, Hei Man  
(Technician)

Checked by : Guy Kong Ping Ki  
(Laboratory Manager)

- END OF REPORT -



東業德勤測試顧問有限公司  
ETS-TESTCONSULT LTD.™


8/F Block B,  
Yee Hong Industrial Centre,  
34-36 Au Pui Wan Street,  
Fo Tan, Hong Kong  
T: +852 2695 8318  
F: +852 2695 3044  
E: [ets@ets-testconsult.com](mailto:ets@ets-testconsult.com)  
W: [www.ets-testconsult.com](http://www.ets-testconsult.com)

### TEST REPORT

#### Calibration Report of High Volume Air Sampler

|              |                                                                                                                         |                      |                          |      |      |      |
|--------------|-------------------------------------------------------------------------------------------------------------------------|----------------------|--------------------------|------|------|------|
| Manufacturer | : <u>Graseby GMW</u>                                                                                                    | Date of Calibration  | : <u>02 August 2025</u>  |      |      |      |
| Serial No.   | : <u>1180 ( ET / EA / 003 / 04 )</u>                                                                                    | Calibration Due Date | : <u>01 October 2025</u> |      |      |      |
| Method       | : Based on Operations Manual for the 5-point calibration using standard calibration kit manufactured by Tisch TE-5025 A |                      |                          |      |      |      |
| Results      |                                                                                                                         |                      |                          |      |      |      |
|              | Flow recorder reading (cfm)                                                                                             | 52                   | 47                       | 41   | 34   | 26   |
|              | Qstd (Actual flow rate, m <sup>3</sup> /min)                                                                            | 1.55                 | 1.40                     | 1.23 | 1.04 | 0.85 |
|              | Pressure : 752.24 mm Hg                                                                                                 |                      | Temp. : 301 K            |      |      |      |

#### Sampler 1180 Calibration Curve Site: Tuen Mun (TM-RA2)

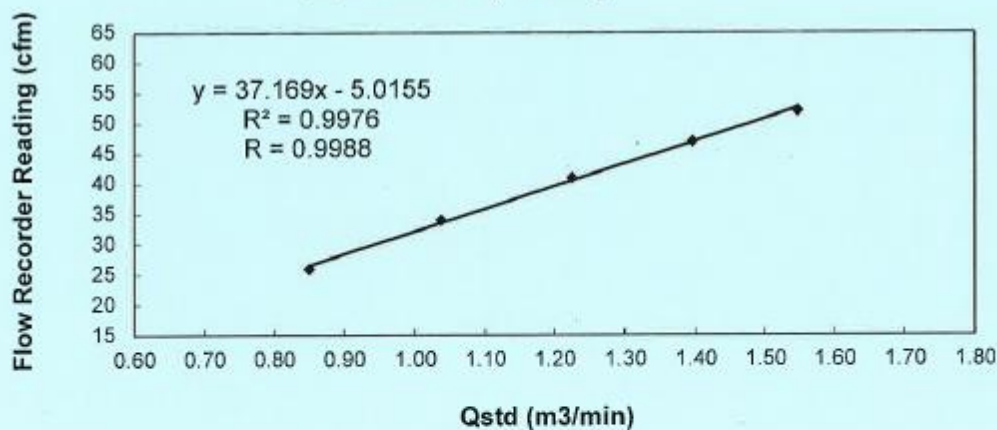

Acceptance Criteria : Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies\* / does-not-comply\* with the specified requirements and is deemed acceptable / unacceptable\* for use.

Calibrated by : MAK, Kei Wai  
(Assistant Supervisor)

Checked by : LAU, Chi Leung  
(Environmental Team Leader)

- END OF REPORT -





東業德勤測試顧問有限公司  
**ETS-TESTCONSULT LTD.**

8/F Block B,  
Verispring Industrial Centre,  
34-36 Au Pui Wan Street,  
Fo Tan, Hong Kong

T: +852 2695 6315  
F: +852 2695 9944  
E: [et@ets-testconsult.com](mailto:et@ets-testconsult.com)  
W: [www.ets-testconsult.com](http://www.ets-testconsult.com)

**TEST REPORT**

**Calibration Report  
of  
High Volume Air Sampler**


**Manufacturer** : Graseby GMW **Date of Calibration** : 30 September 2025

**Serial No.** : 1180 (ET / EA / 003 / 04) **Calibration Due Date** : 29 November 2025

**Method** : Based on Operations Manual for the 5-point calibration using standard calibration kit manufactured by Tisch TE-5025 A

|                |                                              |               |      |      |      |      |
|----------------|----------------------------------------------|---------------|------|------|------|------|
| <b>Results</b> | Flow recorder reading (cfm)                  | 50            | 45   | 39   | 32   | 24   |
|                | Qstd (Actual flow rate, m <sup>3</sup> /min) | 1.57          | 1.39 | 1.22 | 1.01 | 0.84 |
|                | Pressure : 759.44 mm Hg                      | Temp. : 303 K |      |      |      |      |

**Sampler 1180 Calibration Curve  
Site: Tuen Mun (TM-RA2)**

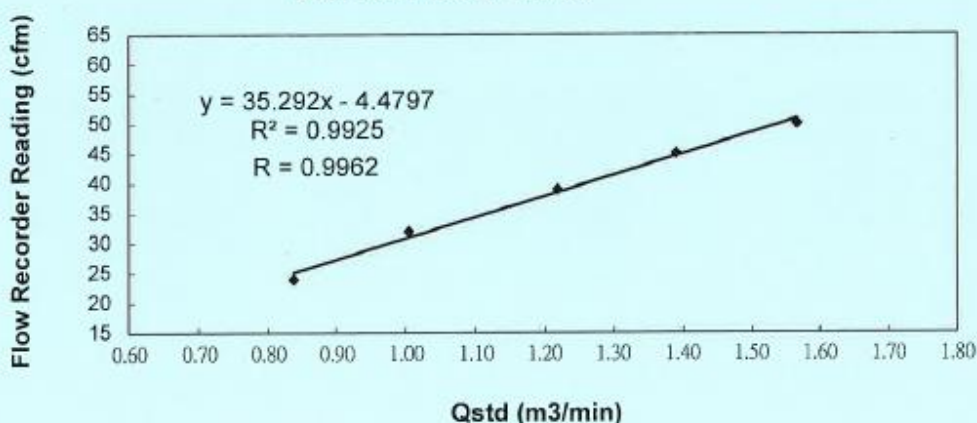

Acceptance Criteria : Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies\* / does not comply\* with the specified requirements and is deemed acceptable / unacceptable\* for use.

Calibrated by : MAK, Kei Wai  
(Assistant Supervisor)

Checked by : LAU, Chi Leung  
(Environmental Team Leader)

- END OF REPORT -



東業德勤測試顧問有限公司  
ETS-TESTCONSULT LTD.™

8/F Block B,  
Vongtong Industrial Centre,  
34-36 Au Pui Wan Street,  
Fo Tan, Hong Kong

T: +852 2895 8318  
F: +852 2895 3944  
E: ets@ets-testconsult.com  
W: www.ets-testconsult.com

TEST REPORT

**Calibration Report  
of  
High Volume Air Sampler**


**Manufacturer** : Graseby GMW **Date of Calibration** : 02 August 2025

**Serial No.** : 1174 (ET / EA / 003 / 08) **Calibration Due Date** : 01 October 2025

**Method** : Five-point calibration by using standard calibration kit Tisch TE-5025A refer to the Operations Manual

|                |                                              |              |      |         |       |      |
|----------------|----------------------------------------------|--------------|------|---------|-------|------|
| <b>Results</b> | Flow recorder reading (cfm)                  | 52           | 46   | 40      | 32    | 27   |
|                | Qstd (Actual flow rate, m <sup>3</sup> /min) | 1.55         | 1.39 | 1.20    | 1.03  | 0.85 |
|                | Pressure :                                   | 752.24 mm Hg |      | Temp. : | 301 K |      |

**Sampler 1174 Calibration Curve  
Site: Tuen Mun CWSF (TM1a)**

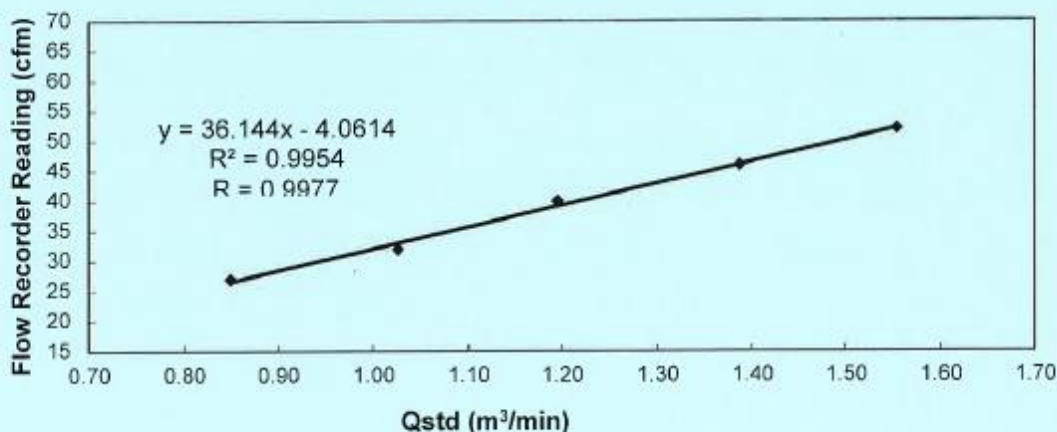

Acceptance Criteria : Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration.

The high volume sampler complies\* / does-not-comply\* with the specified requirements and is deemed acceptable\* / unacceptable\* for use.

Calibrated by : MAK, Kei Wai  
(Assistant Supervisor)

Checked by : LAU, Chi Leung  
(Environmental Team Leader)

- END OF REPORT -



東業德勤測試顧問有限公司  
ETS-TESTCONSULT LTD.

TEST REPORT


8/F Block B,  
Veristrong Industrial Centre,  
34-36 Au Fui Wan Street,  
Fo Tan, Hong Kong  
T: +852 2695 8318  
F: +852 2695 3944  
E: ets@ets-testconsult.com  
W: www.ets-testconsult.com

**Calibration Report  
of  
High Volume Air Sampler**

**Manufacturer** : Graseby GMW **Date of Calibration** : 30 September 2025  
**Serial No.** : 1174 (ET / EA / 003 / 08) **Calibration Due Date** : 29 November 2025  
**Method** : Five-point calibration by using standard calibration kit Tisch TE-5025A refer to the Operations Manual

|                |                                              |              |      |      |         |       |
|----------------|----------------------------------------------|--------------|------|------|---------|-------|
| <b>Results</b> | Flow recorder reading (cfm)                  | 54           | 49   | 41   | 33      | 24    |
|                | Qstd (Actual flow rate, m <sup>3</sup> /min) | 1.59         | 1.42 | 1.25 | 1.04    | 0.78  |
|                | Pressure :                                   | 759.44 mm Hg |      |      | Temp. : | 303 K |

**Sampler 1174 Calibration Curve  
Site: Tuen Mun CWSF (TM1a)**

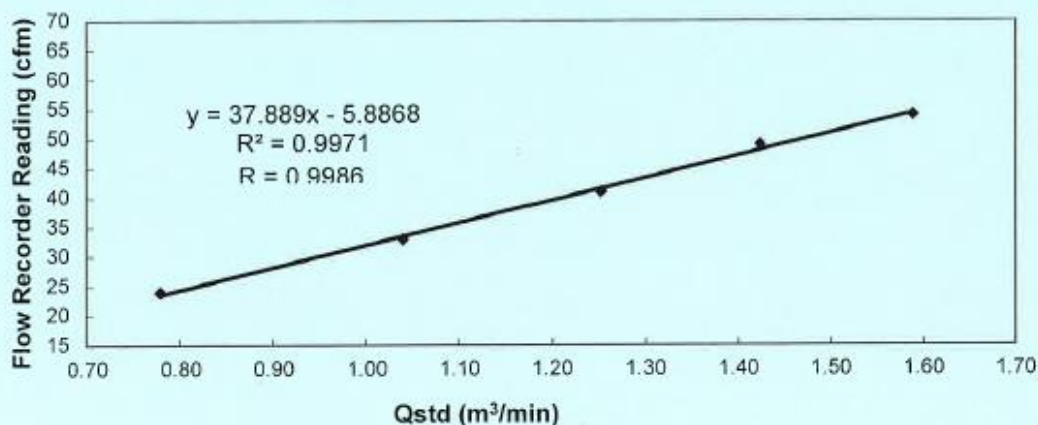

Acceptance Criteria : Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration.

The high volume sampler complies\* / does-not-comply\* with the specified requirements and is deemed acceptable\* / unacceptable\* for use.

Calibrated by : MAK, Kei Wai  
(Assistant Supervisor)

Checked by : LAU, Chi Leung  
(Environmental Team Leader)

- END OF REPORT -





東業德勤測試顧問有限公司  
**ETS-TESTCONSULT LTD.™**

8/F Block B,  
Verisong Industrial Centre,  
34-36 Au Pui Wan Street,  
Fo Tan, Hong Kong  
T: +852 2695 8318  
F: +852 2695 3944  
E: etl@ets-testconsult.com  
W: www.ets-testconsult.com


**TEST REPORT**

**Calibration Report  
of  
High Volume Air Sampler**

**Manufacturer** : Graseby 105 **Date of Calibration** : 01 August 2025  
**Serial No.** : 9795 ( ET / EA / 003 / 18 ) **Calibration Due Date** : 30 September 2025  
**Method** : Five-point calibration by using standard calibration kit Tisch TE-5025A refer to the Operations Manual

|                |                                              |               |      |      |      |      |
|----------------|----------------------------------------------|---------------|------|------|------|------|
| <b>Results</b> | Flow recorder reading (cfm)                  | 48            | 42   | 35   | 29   | 22   |
|                | Qstd (Actual flow rate, m <sup>3</sup> /min) | 1.66          | 1.46 | 1.26 | 1.02 | 0.83 |
|                | Pressure : 750.29 mm Hg                      | Temp. : 303 K |      |      |      |      |

**Sampler 9795 Calibration Curve  
Site: Tseung Kwan O 137 (TKO-A1)**

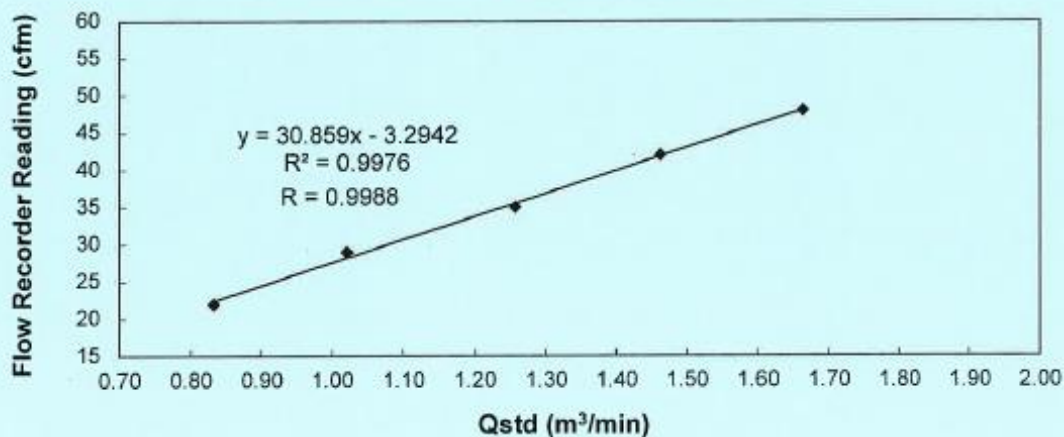

Acceptance Criteria : Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies\* / does-not-comply\* with the specified requirements and is deemed acceptable\* / unacceptable\* for use.

Calibrated by : PT  
To, Kwan Yin  
(Technician)

Checked by : LAU, Chi Leung  
LAU, Chi Leung  
(Environmental Team Leader)

- END OF REPORT -



東業德勤測試顧問有限公司  
ETS-TESTCONSULT LTD.™

8/F Block B,  
Verderburg Industrial Centre,  
34-36 Au Pui Wan Street,  
Po Tan, Hong Kong

T: +852 2695 8318  
F: +852 2695 3944  
E: ets@ets-testconsult.com  
W: www.ets-testconsult.com

### TEST REPORT

#### Calibration Report of High Volume Air Sampler


**Manufacturer** : Graseby 105 **Date of Calibration** : 26 September 2025

**Serial No.** : 9795 ( ET / EA / 003 / 18 ) **Calibration Due Date** : 25 November 2025

**Method** : Five-point calibration by using standard calibration kit Tisch TE-5025A refer to the Operations Manual

|                |                                              |               |      |      |      |      |
|----------------|----------------------------------------------|---------------|------|------|------|------|
| <b>Results</b> | Flow recorder reading (cfm)                  | 50            | 46   | 38   | 32   | 25   |
|                | Qstd (Actual flow rate, m <sup>3</sup> /min) | 1.65          | 1.46 | 1.28 | 1.06 | 0.88 |
|                | Pressure : 759.59 mm Hg                      | Temp. : 302 K |      |      |      |      |

#### Sampler 9795 Calibration Curve Site: Tseung Kwan O 137 (TKO-A1)

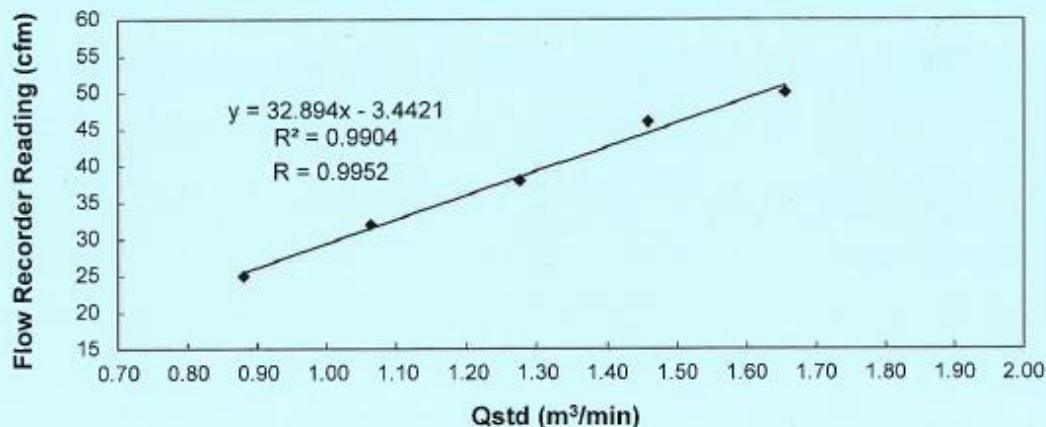

Acceptance Criteria : Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies\* / ~~does not comply~~\* with the specified requirements and is deemed acceptable\* / unacceptable\* for use.

Calibrated by : MAK, Kei Wai  
(Assistant Supervisor)

Checked by : LAU, Chi Leung  
(Environmental Team Leader)

- END OF REPORT -



東業德勤測試顧問有限公司  
**ETS-TESTCONSULT LTD.**

MF Block B,  
Veristrong Industrial Centre,  
34-36 Au Pui Wan Street,  
Fo Tan, Hong Kong  
T: +852 2685 8318  
F: +852 2695 3944  
E: ets@ets-testconsult.com  
W: www.ets-testconsult.com


**TEST REPORT**

**Calibration Report  
of  
High Volume Air Sampler**

**Manufacturer** : Graseby GMW      **Date of Calibration** : 30 September 2025  
**Serial No.** : 2483 (ET / EA / 003 / 26)      **Calibration Due Date** : 29 November 2025  
**Method** : Five-point calibration by using standard calibration kit Tisch TE-5025A refer to the Ope  
Manual

|                |                                              |               |      |      |      |      |
|----------------|----------------------------------------------|---------------|------|------|------|------|
| <b>Results</b> | Flow recorder reading (cfm)                  | 56            | 51   | 44   | 34   | 29   |
|                | Qstd (Actual flow rate, m <sup>3</sup> /min) | 1.52          | 1.37 | 1.20 | 1.01 | 0.82 |
|                | Pressure : 759.44 mm Hg                      | Temp. : 303 K |      |      |      |      |

**Sampler 2483 Calibration Curve  
Site: Tuen Mun CWSF (TM2)**

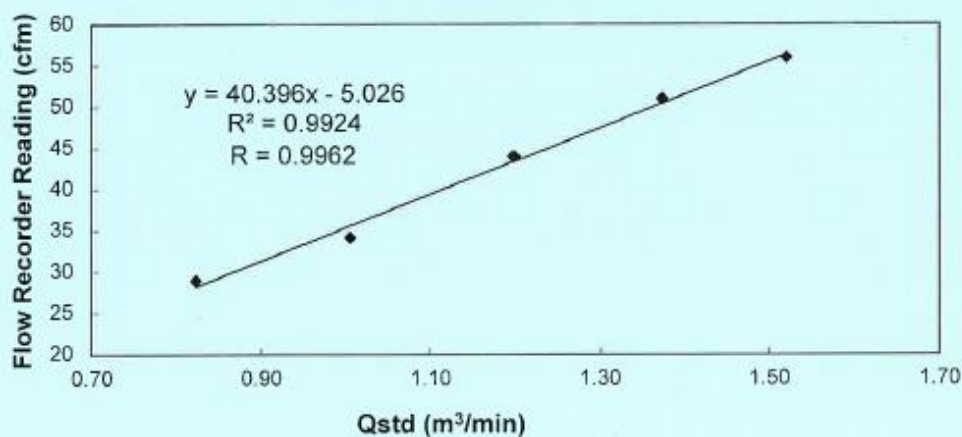

Acceptance Criteria : Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point cali

The high volume sampler complies\* / does not comply\* with the specified requirements and is deemed acce|  
unacceptable\* for use.

Calibrated by : MAK, Kei Wai  
MAK, Kei Wai  
(Assistant Supervisor)

Checked by : LAU, Chi Leung  
LAU, Chi Leung  
(Environmental Team Leader)

- END OF REPORT -





RECALIBRATION

DUE DATE:

January 13, 2026

# Certificate of Calibration

## Calibration Certification Information

|                      |                  |                 |        |     |       |       |
|----------------------|------------------|-----------------|--------|-----|-------|-------|
| Cal. Date:           | January 13, 2025 | Rootsmeter S/N: | 438320 | Ta: | 294   | °K    |
| Operator:            | Jim Tisch        |                 |        | Pa: | 754.4 | mm Hg |
| Calibration Model #: | TE-5025A         | Calibrator S/N: | 4317   |     |       |       |

| Run | Vol. Init (m3) | Vol. Final (m3) | ΔVol. (m3) | ΔTime (min) | ΔP (mm Hg) | ΔH (in H2O) |
|-----|----------------|-----------------|------------|-------------|------------|-------------|
| 1   | 1              | 2               | 1          | 1.4160      | 3.2        | 2.00        |
| 2   | 3              | 4               | 1          | 1.0140      | 6.4        | 4.00        |
| 3   | 5              | 6               | 1          | 0.8940      | 7.9        | 5.00        |
| 4   | 7              | 8               | 1          | 0.8560      | 8.8        | 5.50        |
| 5   | 9              | 10              | 1          | 0.7090      | 12.7       | 8.00        |

## Data Tabulation

| Vstd (m3) | Qstd (x-axis) | $\sqrt{\Delta H \left( \frac{Pa}{Pstd} \right) \left( \frac{Tstd}{Ta} \right)}$ (y-axis) | Va     | Qa (x-axis) | $\sqrt{\Delta H \left( \frac{Ta}{Pa} \right)}$ (y-axis) |
|-----------|---------------|------------------------------------------------------------------------------------------|--------|-------------|---------------------------------------------------------|
| 1.0018    | 0.7075        | 1.4185                                                                                   | 0.9958 | 0.7032      | 0.8829                                                  |
| 0.9976    | 0.9838        | 2.0061                                                                                   | 0.9915 | 0.9778      | 1.2486                                                  |
| 0.9956    | 1.1136        | 2.2429                                                                                   | 0.9895 | 1.1069      | 1.3959                                                  |
| 0.9944    | 1.1617        | 2.3524                                                                                   | 0.9883 | 1.1546      | 1.4641                                                  |
| 0.9892    | 1.3952        | 2.8371                                                                                   | 0.9832 | 1.3867      | 1.7657                                                  |
| QSTD      | m=            | 2.05352                                                                                  | QA     | m=          | 1.28588                                                 |
|           | b=            | -0.03071                                                                                 |        | b=          | -0.01911                                                |
|           | r=            | 0.99978                                                                                  |        | r=          | 0.99978                                                 |

## Calculations

|                                                                                                               |                                                                            |
|---------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
| $Vstd = \Delta Vol((Pa - \Delta P)/Pstd)(Tstd/Ta)$                                                            | $Va = \Delta Vol((Pa - \Delta P)/Pa)$                                      |
| $Qstd = Vstd/\Delta Time$                                                                                     | $Qa = Va/\Delta Time$                                                      |
| For subsequent flow rate calculations:                                                                        |                                                                            |
| $Qstd = 1/m \left( \sqrt{\Delta H \left( \frac{Pa}{Pstd} \right) \left( \frac{Tstd}{Ta} \right)} - b \right)$ | $Qa = 1/m \left( \sqrt{\Delta H \left( \frac{Ta}{Pa} \right)} - b \right)$ |

## Standard Conditions

Tstd: 298.15 °K

Pstd: 760 mm Hg

Key

ΔH: calibrator manometer reading (in H2O)

ΔP: rootsmeter manometer reading (mm Hg)

Ta: actual absolute temperature (°K)


Pa: actual barometric pressure (mm Hg)

b: intercept

m: slope

## RECALIBRATION


US EPA recommends annual recalibration per 1998 40 Code of Federal Regulations Part 50 to 51, Appendix B to Part 50, Reference Method for the Determination of Suspended Particulate Matter in the Atmosphere, 9.2.17, page 30

|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | E-1           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |

## **APPENDIX E – METHODOLOGY FOR CORRELATION CALCULATION BETWEEN POTABLE LASER DUST METER AND HIGH-VOLUME SAMPLER**

---



|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | E-2           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |

## **Correlation between Portable laser dusty meter and High-volume Sampler Methodology**


Correlation results between the direct reading meter and High-Volume Sampler

### High – Volume Sampler Calibration

The specification, a sample of calibration certificate and certificate of comparison check with High volume sampler of the proposed air quality monitoring equipment listed in Table 2.1 are attached in appendix.

The High-Volume air sampler calibration procedure based on the requirement of manufacturer is shown below.

- a. Disconnect the sampler motor from the mass flow controller and connect the motor to a stable AC power source.
- b. Mount the calibrator orifice and top loading adapter plate to the sampler. A sampling filter is generally not used during this procedure. Tighten the top loading adapter hold down nuts securely to ensure that no air leaks are present.
- c. Allow the sampler motor to warm up to its normal operating temperature (approximately 10-15 minutes).
- d. Conduct a leak test by covering the hole(s) on top of the orifice and pressure tap on the orifice with your hands. Listen for a high-pitched squealing sound made by escaping air. If this sound is heard, a leak is present and the top loading adapter hold-down nuts need to be re-tightened. If the sound is lower, the leak is near one of the other gaskets in the system. Avoid running the sampler for longer than 30 seconds at a time with the orifice blocked to avoid overheating the motor. Do not perform this leak test procedure with a manometer connected to the side tap on the calibration orifice or the blower motor. Liquid from the manometer could be drawn into the system and cause motor damage
- e. Connect one side of a water manometer to the pressure tap on the side of the orifice with a rubber vacuum tube. Leave the opposite side of the manometer open to the atmosphere. Note: Both valves on the manometer have to be open for the liquid to flow freely. One side of the 'U' tube goes up the other goes down; add together for the "H<sub>2</sub>O" reading.
- f. A manometer must be held vertically to ensure accurate readings. Tapping the backside of the continuous flow recorder will help to center the pen and provide accurate readings. When using a variable orifice, five flow rates are achieved in this step by adjusting the knob on the variable orifice to five different positions and taking five different reading.

|                                                                                   |                                                                          |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  | Page | E-3           |
|                                                                                   | Monthly EM&A Report                                                      |  | Ref# | EMA2403/03/58 |
|                                                                                   |                                                                          |  | Rev. | 01            |
|                                                                                   |                                                                          |  | Date | Nov 25        |

- g. Record the ambient air temperature, the ambient barometric pressure, the sampler serial number, the orifice s/n, the orifice slope and intercept with date last certified, today's date, site location and the operators initial on the attached blank calibration sheet.
- h. An example of a Lead (or TSP) Sampler Calibration Data Sheet has been attached with data filled in from a typical calibration. This includes the transfer standard orifice calibration relationship which was taken from the Orifice Calibration Worksheet that accompanies the calibrator orifice.

Disconnect the sampler motor from its power source and remove the orifice and top loading adapter plate. Re-connect the sampler motor to the electronic mass flow controller.

Since this calibration is for a TSP sampler, the slope and intercept for this orifice uses standard flows rather than actual flows and is taken from the Q standard section of the Orifice Calibration Worksheet. The Q actual flows are only used when calibrating a PM-10 sampler.

The five orifice manometer readings taken during the calibration have been recorded in the column on the data worksheet titled Orifice "H<sub>2</sub>O". The five continuous flow recorder readings taken during the calibration have been recorded under the column titled I chart.

The orifice manometer readings need to be converted to the standard air flows they represent using the following equation:

$$Q_{std} = 1/m[\text{Sqrt}((H_2O)(P_a/760)(298/T_a))-b]$$

where:

$Q_{std}$  = actual flow rate as indicated by the calibrator orifice, m<sup>3</sup>/min

$H_2O$  = orifice manometer reading during calibration, "H<sub>2</sub>O

$T_a$  = ambient temperature during calibration, K (  $K = 273 + ^\circ\text{C}$  )


298 = standard temperature, a constant that never changes, K

$P_a$  = ambient barometric pressure during calibration, mm Hg

760 = standard barometric pressure, a constant that never changes, mm Hg

$m$  =  $Q_{std}$  standard slope of orifice calibration relationship

$b$  =  $Q_{std}$  standard intercept of orifice calibration relationship.

|                                                                                   |                                                                                 |  |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|--|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> |  | Page | E-4           |
|                                                                                   |                                                                                 |  | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  |  | Rev. | 01            |
|                                                                                   |                                                                                 |  | Date | Nov 25        |

Once these standard flow rates have been determined for each of the five run points, they are recorded in the column titled Qstd and are represented in cubic meters per minute.

The continuous flow recorder readings taken during the calibration need to be corrected to the current meteorological conditions using the following equation:

$$IC = I[\text{Sqrt}((Pa/760)(298/Ta))]$$

where:

IC = continuous flow recorder readings corrected to current Ta and Pa

I = continuous flow recorder readings during calibration

Pa = ambient barometric pressure during calibration, mm Hg.

760 = standard barometric pressure, a constant that never changes, mm Hg

Ta = ambient temperature during calibration, K ( K = 273 + °C)

298 = standard temperature, a constant that never changes, K


After each of the continuous flow recorder readings have been corrected, they are recorded in the column titled IC (corrected).

Using Qstd and IC (or FLOW (corrected)) as the x and y axis respectively, a slope, intercept, and correlation coefficient can be calculated using the least squares regression method. The correlation coefficient should never be less than 0.990 after a five-point calibration. A coefficient below .990 indicates a calibration that is not linear, and the calibration should be performed again. If this occurs, it is most likely the result of an air leak during the calibration or high wind speed during the calibration procedure.

The equations for determining the slope (m) and intercept (b) are as follows:

$$m = \frac{(\sum xy) - \frac{(\sum x)(\sum y)}{n}}{\frac{(\sum x^2)}{n} - n} ; \quad b = \bar{y} - m\bar{x}$$

The equation for the coefficient of correlation (r) is as follows:

|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | E-5           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |

$$r = \frac{\sum xy - \frac{(\sum x)(\sum y)}{n}}{\sqrt{\left[ \sum x^2 - \frac{(\sum x)^2}{n} \right] \left[ \sum y^2 - \frac{(\sum y)^2}{n} \right]}}$$

where: n = number of observations  
 $\sum$  = sum of


The acceptable operating flow range of a TSP sampler is 1.1 to 1.7 m<sup>3</sup>/min (39 to 60 CFM). Looking at the worksheet column Qstd(see page 38), the flow rates that are within this range can be identified along with the chart reading (I) that represents them. For instance, if you wanted to set this sampler at 1.265 m<sup>3</sup>/min (44.67 CFM) (Make sure the mass flow controller is plugged in and a filter is in place) you would turn the Flow Adjustment screw until the continuous flow recorder read 37 on the chart. By making sure that the sampler is operating at a chart reading (or manometer reading) that is within the acceptable range, it can be assumed that valid TSP data is being collected.

A calibration that has a correlation coefficient of less than .990 is not considered linear and should be re-calibrated. Therefore, if  $r < 0.990$ , return all the points or only the point with the greatest deviation and the recalculate.

The 24-hour TSP levels to be measured by direct reading methods, utilising portable Laser Particle Photometer Monitors (Sibata Model LD-3B), in place of High-Volume Sampler (HVS) if HVS experience difficulties in operation during monitoring. It is demonstrated by the previous project experiences, that 24-hour TSP monitoring results collected by direct reading method are comparable to those produced by the high-volume sampling method, to indicate short event impacts. The projects utilising the collection of 24-hour TSP levels data by direct reading methods are shown below.-

***Project Reference for utilising the collection of 24-hour TSP levels data by direct reading methods***

| Project Contract Number | Location                                                                       | Status   |
|-------------------------|--------------------------------------------------------------------------------|----------|
| NDO 03/2018             | Road Widening and Retrofitting Noise Barriers on Tai Po Road (Sha Tin Section) | On-going |

|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | E-6           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |

|             |                                                                                         |          |
|-------------|-----------------------------------------------------------------------------------------|----------|
| NDO 14/2018 | Advance and First Stage Works of Kwu Tung North and Fanling North New Development Areas | On-going |
|-------------|-----------------------------------------------------------------------------------------|----------|

Calculation of the value of 24-hour TSP concentration is given by the average of 24 calculated 1-hour TSP concentration, where the calculated 1-hr TSP concentration is given by the product of the direct reading and the K-factor based on the correlation results between the direct reading meter and High-Volume Sampler.


The correlation results between the direct reading meter and High-Volume Sampler shall be review with bimonthly internal calibration. To maintain the correlation with two sets of data (monitoring data from HVS and monitoring data from Portable Laser Particle Photometer Monitors) bimonthly internal calculated are strongly linked together two sets of data.

To protect the dust meter from being damaged and to operate without disturbances or nuisance, temporary barriers shall be erected around the monitoring equipment during the monitoring period. Temporary barriers will be placed approx. 0.5m away from the dust meter.

#### **Maintenance/ Calibration for the High-Volume Sampler (HVS) being correlation**


The HVS shall be calibrated bimonthly in accordance to the specification in the manufacturer's manual. The calibration certificates shall be available to the IEC for checking upon request. The validity and accuracy of the HVS shall also be tested against the result by the TE-5025A Calibration Kit periodically, Details of Calibration Cert and Specification for HVS – Graseby GMW and HVS- Calibration Kit TE-5025A are given in Appendix 2-1 and Appendix 2-3.

Graseby GMW is chosen as the HVS for 24-hour TSP monitoring and Tisch TE – 5025A is chosen as the HVS Calibration-Kit for HVS calibration.

|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | F-1           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |


## APPENDIX F – AIR QUALITY AND NOISE IMPACT MONITORING SCHEDULE

---

|                                                                                   |                                                                          |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  | Page | F-2           |
|                                                                                   | Monthly EM&A Report                                                      |  | Ref# | EMA2403/03/58 |
|                                                                                   |                                                                          |  | Rev. | 01            |
|                                                                                   |                                                                          |  | Date | Nov 25        |

## 2025 October Air Quality and Noise Impact Monitoring Schedule


| Sunday | Monday                                       | Tuesday                                      | Wednesday                                    | Thursday | Friday                    | Saturday |
|--------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------|---------------------------|----------|
| 28-Sep | 29-Sep                                       | 30-Sep                                       | 01-Oct                                       | 02-Oct   | 03-Oct                    | 04-Oct   |
|        |                                              | 1 hr TSP x 3<br>24 hr TSP<br>Noise (30 mins) |                                              |          |                           |          |
| 05-Oct | 06-Oct                                       | 07-Oct                                       | 08-Oct                                       | 09-Oct   | 10-Oct                    | 11-Oct   |
|        | 1 hr TSP x 3<br>24 hr TSP<br>Noise (30 mins) |                                              |                                              |          | 1 hr TSP x 3<br>24 hr TSP |          |
| 12-Oct | 13-Oct                                       | 14-Oct                                       | 15-Oct                                       | 16-Oct   | 17-Oct                    | 18-Oct   |
|        |                                              |                                              | 1 hr TSP x 3<br>24 hr TSP<br>Noise (30 mins) |          |                           |          |
| 19-Oct | 20-Oct                                       | 21-Oct                                       | 22-Oct                                       | 23-Oct   | 24-Oct                    | 25-Oct   |
|        |                                              | 1 hr TSP x 3<br>24 hr TSP<br>Noise (30 mins) |                                              |          |                           |          |
| 26-Oct | 27-Oct                                       | 28-Oct                                       | 29-Oct                                       | 30-Oct   | 31-Oct                    | 01-Nov   |
|        | 1 hr TSP x 3<br>24 hr TSP<br>Noise (30 mins) |                                              |                                              |          | 1 hr TSP x 3<br>24 hr TSP |          |

|                                                                                   |                                                                          |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  | Page | F-3           |
|                                                                                   | Monthly EM&A Report                                                      |  | Ref# | EMA2403/03/58 |
|                                                                                   |                                                                          |  | Rev. | 01            |
|                                                                                   |                                                                          |  | Date | Nov 25        |

### 2025 November Air Quality and Noise Impact Monitoring Schedule


| Sunday | Monday                                       | Tuesday                                      | Wednesday                                    | Thursday                                     | Friday                    | Saturday |
|--------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|---------------------------|----------|
| 26-Oct | 27-Oct                                       | 28-Oct                                       | 29-Oct                                       | 30-Oct                                       | 31-Oct                    | 1-Nov    |
|        | 1 hr TSP x 3<br>24 hr TSP<br>Noise (30 mins) |                                              |                                              |                                              | 1 hr TSP x 3<br>24 hr TSP |          |
| 2-Nov  | 3-Nov                                        | 4-Nov                                        | 5-Nov                                        | 6-Nov                                        | 7-Nov                     | 8-Nov    |
|        |                                              |                                              |                                              | 1 hr TSP x 3<br>24 hr TSP<br>Noise (30 mins) |                           |          |
| 9-Nov  | 10-Nov                                       | 11-Nov                                       | 12-Nov                                       | 13-Nov                                       | 14-Nov                    | 15-Nov   |
|        |                                              |                                              | 1 hr TSP x 3<br>24 hr TSP<br>Noise (30 mins) |                                              |                           |          |
| 16-Nov | 17-Nov                                       | 18-Nov                                       | 19-Nov                                       | 20-Nov                                       | 21-Nov                    | 22-Nov   |
|        |                                              | 1 hr TSP x 3<br>24 hr TSP<br>Noise (30 mins) |                                              |                                              |                           |          |
| 23-Nov | 24-Nov                                       | 25-Nov                                       | 26-Nov                                       | 27-Nov                                       | 28-Nov                    | 29-Nov   |
|        | 1 hr TSP x 3<br>24 hr TSP<br>Noise (30 mins) |                                              |                                              |                                              | 1 hr TSP x 3<br>24 hr TSP |          |
| 30-Nov | 1-Dec                                        | 2-Dec                                        | 3-Dec                                        | 4-Dec                                        | 5-Dec                     | 6-Dec    |
|        |                                              |                                              |                                              | 1 hr TSP x 3<br>24 hr TSP<br>Noise (30 mins) |                           |          |



|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | G-1           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |

## APPENDIX G – AIR QUALITY MONITORING RESULT


---

|                                                                                   |                                                                          |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O | Page | G-4           |
|                                                                                   |                                                                          | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      | Rev. | 01            |
|                                                                                   |                                                                          | Date | Nov 25        |

## Monthly Environmental Monitoring & Audit Report for Porter Shelter Phase 3, Po Toi O Sewage Treatment Plant

### 2025 October 1-hour TSP Monitoring Data of Monitoring Location AMS1N


| Date        | Weather | 1-hour TSP Monitoring |            |                       |                               |
|-------------|---------|-----------------------|------------|-----------------------|-------------------------------|
|             |         |                       | Start Time | Concentration (µg/m³) | Average Concentration (µg/m³) |
| 6- Oct -25  | Sunny   | 1st hr                | 9:21       | 34.0                  | 33.0                          |
|             |         | 2nd hr                | 10:23      | 35.0                  |                               |
|             |         | 3rd hr                | 13:06      | 30.0                  |                               |
| 10- Oct -25 | Fine    | 1st hr                | 11:00      | 34.0                  | 33.0                          |
|             |         | 2nd hr                | 13:00      | 35.0                  |                               |
|             |         | 3rd hr                | 14:00      | 30.0                  |                               |
| 15- Oct -25 | Fine    | 1st hr                | 9:30       | 40.0                  | 41.0                          |
|             |         | 2nd hr                | 10:30      | 41.0                  |                               |
|             |         | 3rd hr                | 13:00      | 42.0                  |                               |
| 21- Oct -25 | Cloudy  | 1st hr                | 9:00       | 36.0                  | 37.0                          |
|             |         | 2nd hr                | 10:00      | 37.0                  |                               |
|             |         | 3rd hr                | 13:00      | 38.0                  |                               |
| 27- Oct -25 | Cloudy  | 1st hr                | 9:00       | 45.0                  | 46.7                          |
|             |         | 2nd hr                | 10:00      | 47.0                  |                               |
|             |         | 3rd hr                | 13:00      | 48.0                  |                               |
| 31- Oct -25 | Fine    | 1st hr                | 9:00       | 30.0                  | 30.7                          |
|             |         | 2nd hr                | 10:00      | 31.0                  |                               |
|             |         | 3rd hr                | 13:00      | 31.0                  |                               |
|             |         |                       |            | Average:              | 36.9                          |
|             |         |                       |            | Action Level:         | 319                           |
|             |         |                       |            | Limit Level:          | 500                           |

|                                                                                   |                                                                          |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O | Page | G-5           |
|                                                                                   |                                                                          | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      | Rev. | 01            |
|                                                                                   |                                                                          | Date | Nov 25        |

## Monthly Environmental Monitoring & Audit Report for Porter Shelter Phase 3, Po Toi O Sewage Treatment Plant

### 2025 October 1-hour TSP Monitoring Data of Monitoring Location AMS-2N1

| Date        | Weather | 1-hour TSP Monitoring |            |                          |                                  |
|-------------|---------|-----------------------|------------|--------------------------|----------------------------------|
|             |         |                       | Start Time | Concentration<br>(µg/m³) | Average Concentration<br>(µg/m³) |
| 6- Oct -25  | Sunny   | 1st hr                | 9:26       | 32.0                     | 32.7                             |
|             |         | 2nd hr                | 10:26      | 34.0                     |                                  |
|             |         | 3rd hr                | 13:11      | 32.0                     |                                  |
| 10- Oct -25 | Fine    | 1st hr                | 11:02      | 32.0                     | 32.7                             |
|             |         | 2nd hr                | 13:02      | 34.0                     |                                  |
|             |         | 3rd hr                | 14:02      | 32.0                     |                                  |
| 15- Oct -25 | Fine    | 1st hr                | 9:35       | 46.0                     | 47.0                             |
|             |         | 2nd hr                | 10:35      | 48.0                     |                                  |
|             |         | 3rd hr                | 13:05      | 47.0                     |                                  |
| 21- Oct -25 | Cloudy  | 1st hr                | 9:35       | 41.0                     | 39.0                             |
|             |         | 2nd hr                | 10:35      | 38.0                     |                                  |
|             |         | 3rd hr                | 13:05      | 38.0                     |                                  |
| 27- Oct -25 | Cloudy  | 1st hr                | 9:35       | 52.0                     | 52.0                             |
|             |         | 2nd hr                | 10:35      | 53.0                     |                                  |
|             |         | 3rd hr                | 13:05      | 51.0                     |                                  |
| 31- Oct -25 | Fine    | 1st hr                | 9:35       | 27.0                     | 31.0                             |
|             |         | 2nd hr                | 10:35      | 32.0                     |                                  |
|             |         | 3rd hr                | 13:05      | 34.0                     |                                  |
|             |         |                       |            | Average:                 | 39.1                             |
|             |         |                       |            | Action Level:            | 279                              |
|             |         |                       |            | Limit Level:             | 500                              |


|                                                                                   |                                                                          |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O | Page | G-6           |
|                                                                                   |                                                                          | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      | Rev. | 01            |
|                                                                                   |                                                                          | Date | Nov 25        |

## Monthly Environmental Monitoring & Audit Report for Porter Shelter Phase 3, Po Toi O Sewage Treatment Plant

### 2025 October 1-hour TSP Monitoring Data

Monitoring Location : AMS-3N

| Date        | Weather | 1-hour TSP Monitoring |            |                          |                                  |
|-------------|---------|-----------------------|------------|--------------------------|----------------------------------|
|             |         |                       | Start Time | Concentration<br>(µg/m³) | Average Concentration<br>(µg/m³) |
| 6- Oct -25  | Sunny   | 1st hr                | 9:16       | 30.0                     | 30.7                             |
|             |         | 2nd hr                | 10:16      | 34.0                     |                                  |
|             |         | 3rd hr                | 13:15      | 28.0                     |                                  |
| 10- Oct -25 | Fine    | 1st hr                | 11:05      | 30.0                     | 30.7                             |
|             |         | 2nd hr                | 13:05      | 34.0                     |                                  |
|             |         | 3rd hr                | 14:05      | 28.0                     |                                  |
| 15- Oct -25 | Fine    | 1st hr                | 9:40       | 32.0                     | 30.7                             |
|             |         | 2nd hr                | 10:40      | 31.0                     |                                  |
|             |         | 3rd hr                | 13:10      | 29.0                     |                                  |
| 21- Oct -25 | Cloudy  | 1st hr                | 9:10       | 27.0                     | 28.3                             |
|             |         | 2nd hr                | 10:10      | 29.0                     |                                  |
|             |         | 3rd hr                | 13:10      | 29.0                     |                                  |
| 27- Oct -25 | Cloudy  | 1st hr                | 9:10       | 37.0                     | 35.7                             |
|             |         | 2nd hr                | 10:10      | 35.0                     |                                  |
|             |         | 3rd hr                | 13:10      | 35.0                     |                                  |
| 31- Oct -25 | Fine    | 1st hr                | 13:05      | 24.0                     | 26.3                             |
|             |         | 2nd hr                | 14:05      | 26.0                     |                                  |
|             |         | 3rd hr                | 15:05      | 29.0                     |                                  |
|             |         |                       |            | Average:                 | 30.4                             |
|             |         |                       |            | Action Level:            | 303                              |
|             |         |                       |            | Limit Level:             | 500                              |


|                                                                                   |                                                                          |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O | Page | G-7           |
|                                                                                   |                                                                          | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      | Rev. | 01            |
|                                                                                   |                                                                          | Date | Nov 25        |


## Monthly Environmental Monitoring & Audit Report for Porter Shelter Phase 3, Po Toi O Sewage Treatment Plant


### 2025 October 1-hour TSP Monitoring Data


Monitoring Location : AMS-4N

| Date        | Weather | 1-hour TSP Monitoring |            |                       |                               |
|-------------|---------|-----------------------|------------|-----------------------|-------------------------------|
|             |         |                       | Start Time | Concentration (µg/m³) | Average Concentration (µg/m³) |
| 6- Oct -25  | Sunny   | 1st hr                | 9:30       | 32.0                  | 31.3                          |
|             |         | 2nd hr                | 10:30      | 33.0                  |                               |
|             |         | 3rd hr                | 13:24      | 29.0                  |                               |
| 10- Oct -25 | Fine    | 1st hr                | 11:09      | 32.0                  | 31.3                          |
|             |         | 2nd hr                | 13:09      | 33.0                  |                               |
|             |         | 3rd hr                | 14:09      | 29.0                  |                               |
| 15- Oct -25 | Fine    | 1st hr                | 9:45       | 32.0                  | 32.7                          |
|             |         | 2nd hr                | 10:45      | 33.0                  |                               |
|             |         | 3rd hr                | 13:15      | 33.0                  |                               |
| 21- Oct -25 | Cloudy  | 1st hr                | 9:15       | 30.0                  | 30.0                          |
|             |         | 2nd hr                | 10:15      | 31.0                  |                               |
|             |         | 3rd hr                | 13:15      | 29.0                  |                               |
| 27- Oct -25 | Cloudy  | 1st hr                | 9:15       | 36.0                  | 34.7                          |
|             |         | 2nd hr                | 10:15      | 34.0                  |                               |
|             |         | 3rd hr                | 13:15      | 34.0                  |                               |
| 31- Oct -25 | Fine    | 1st hr                | 13:11      | 27.0                  | 30.3                          |
|             |         | 2nd hr                | 14:11      | 30.0                  |                               |
|             |         | 3rd hr                | 15:11      | 34.0                  |                               |
|             |         |                       |            | Average:              | 31.7                          |
|             |         |                       |            | Action Level:         | 278                           |
|             |         |                       |            | Limit Level:          | 500                           |


|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | G-6           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |

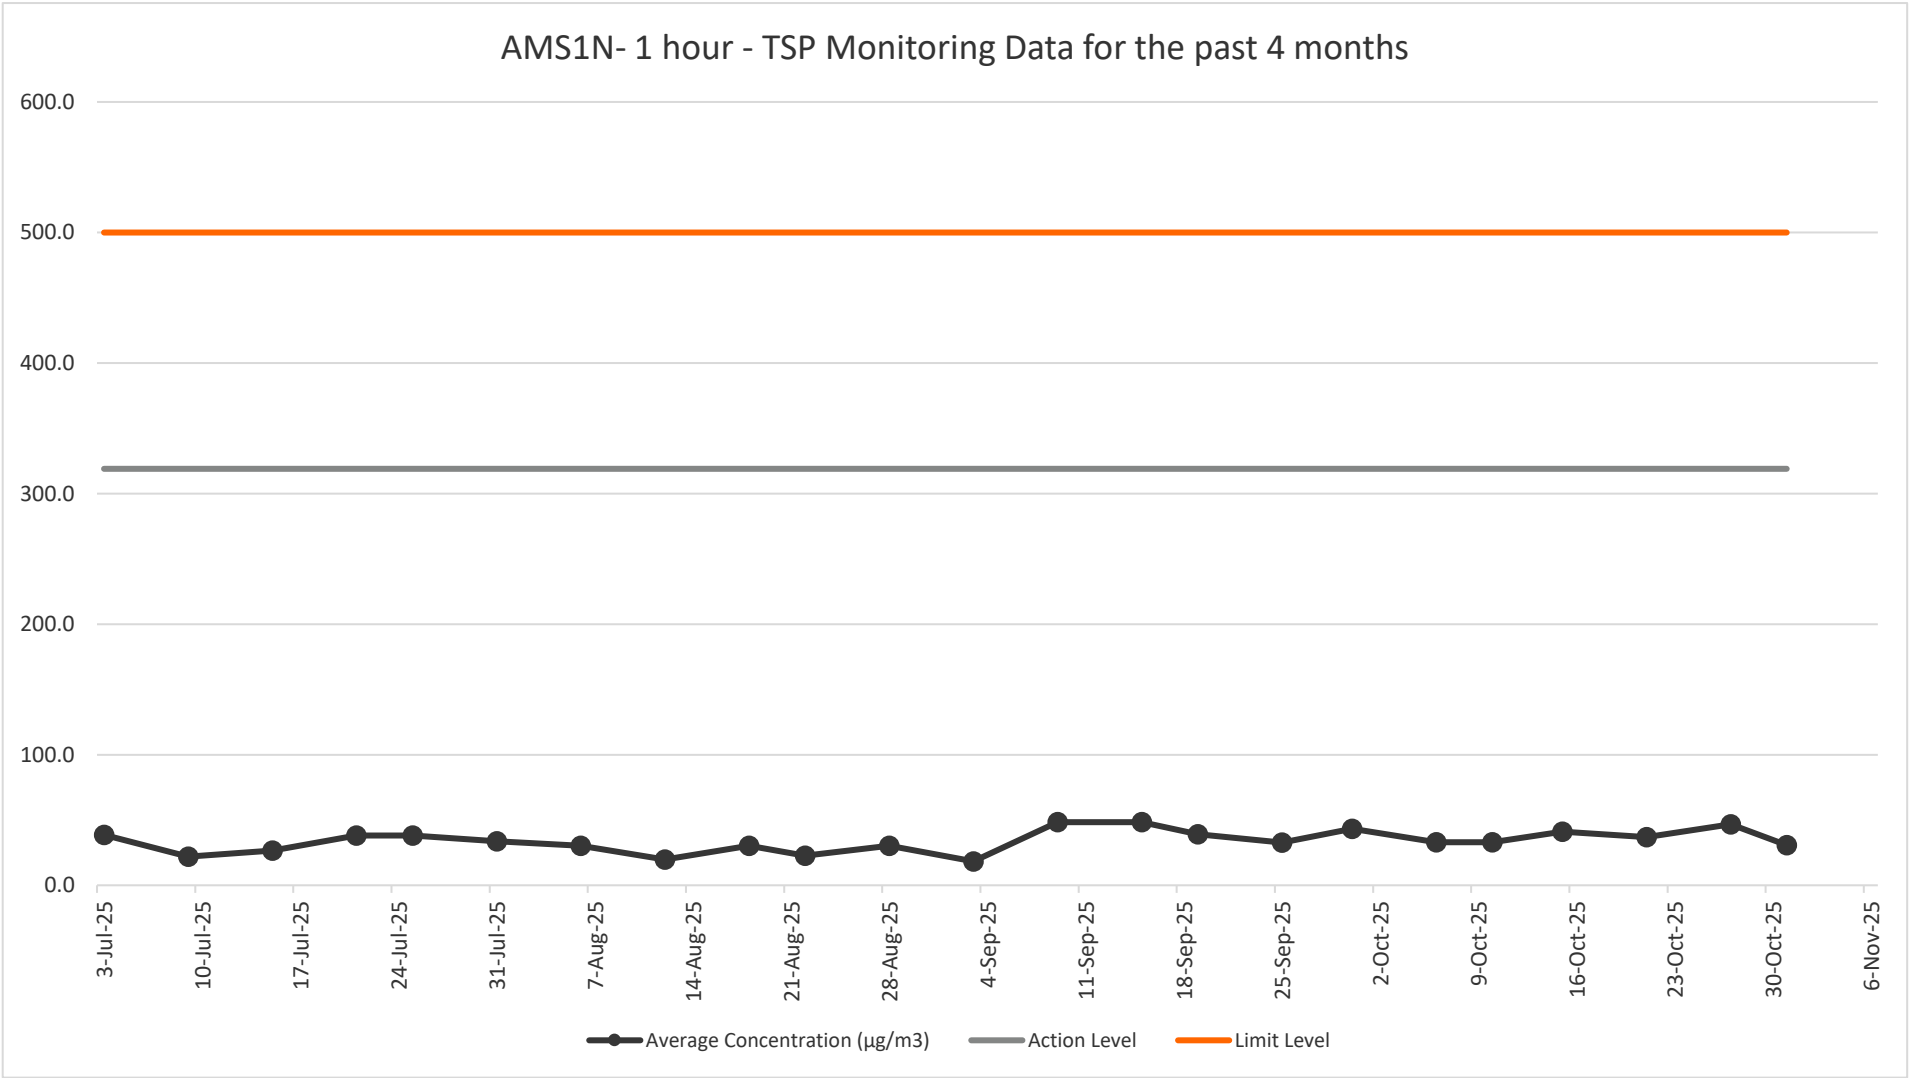



|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | G-7           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |

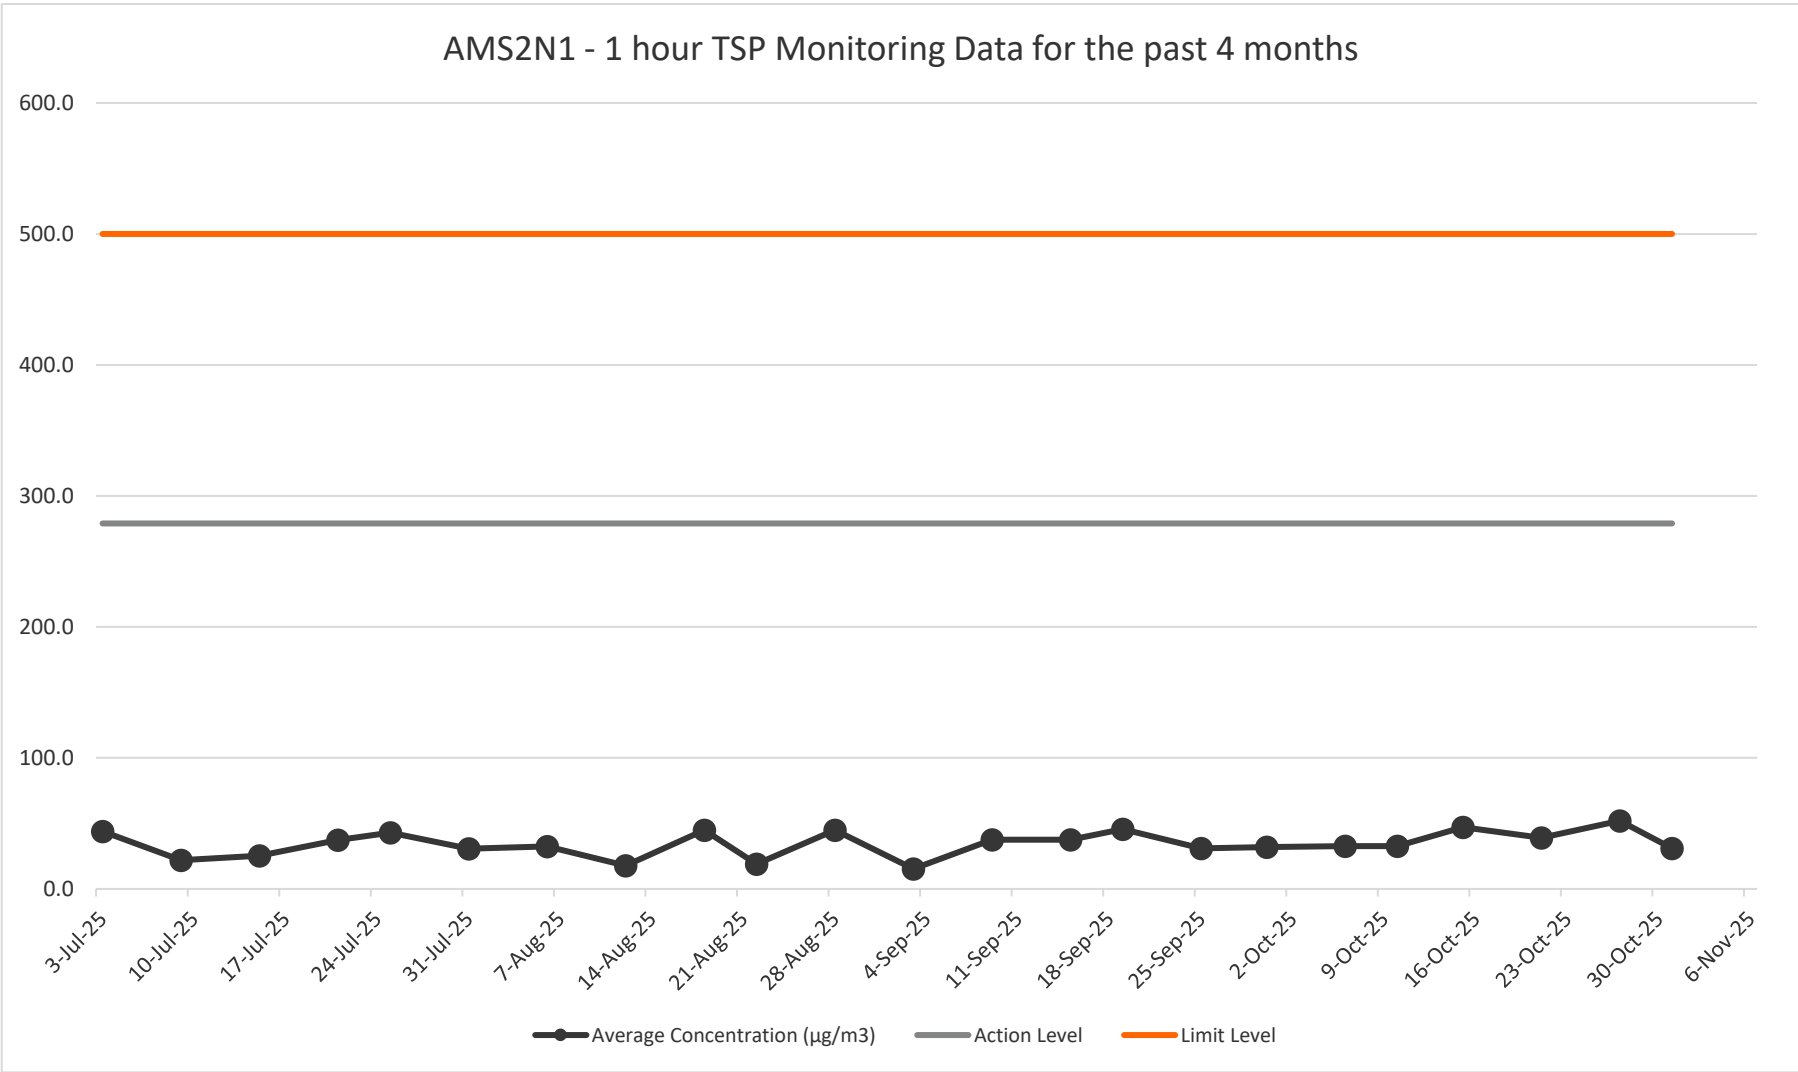





|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | G-8           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |

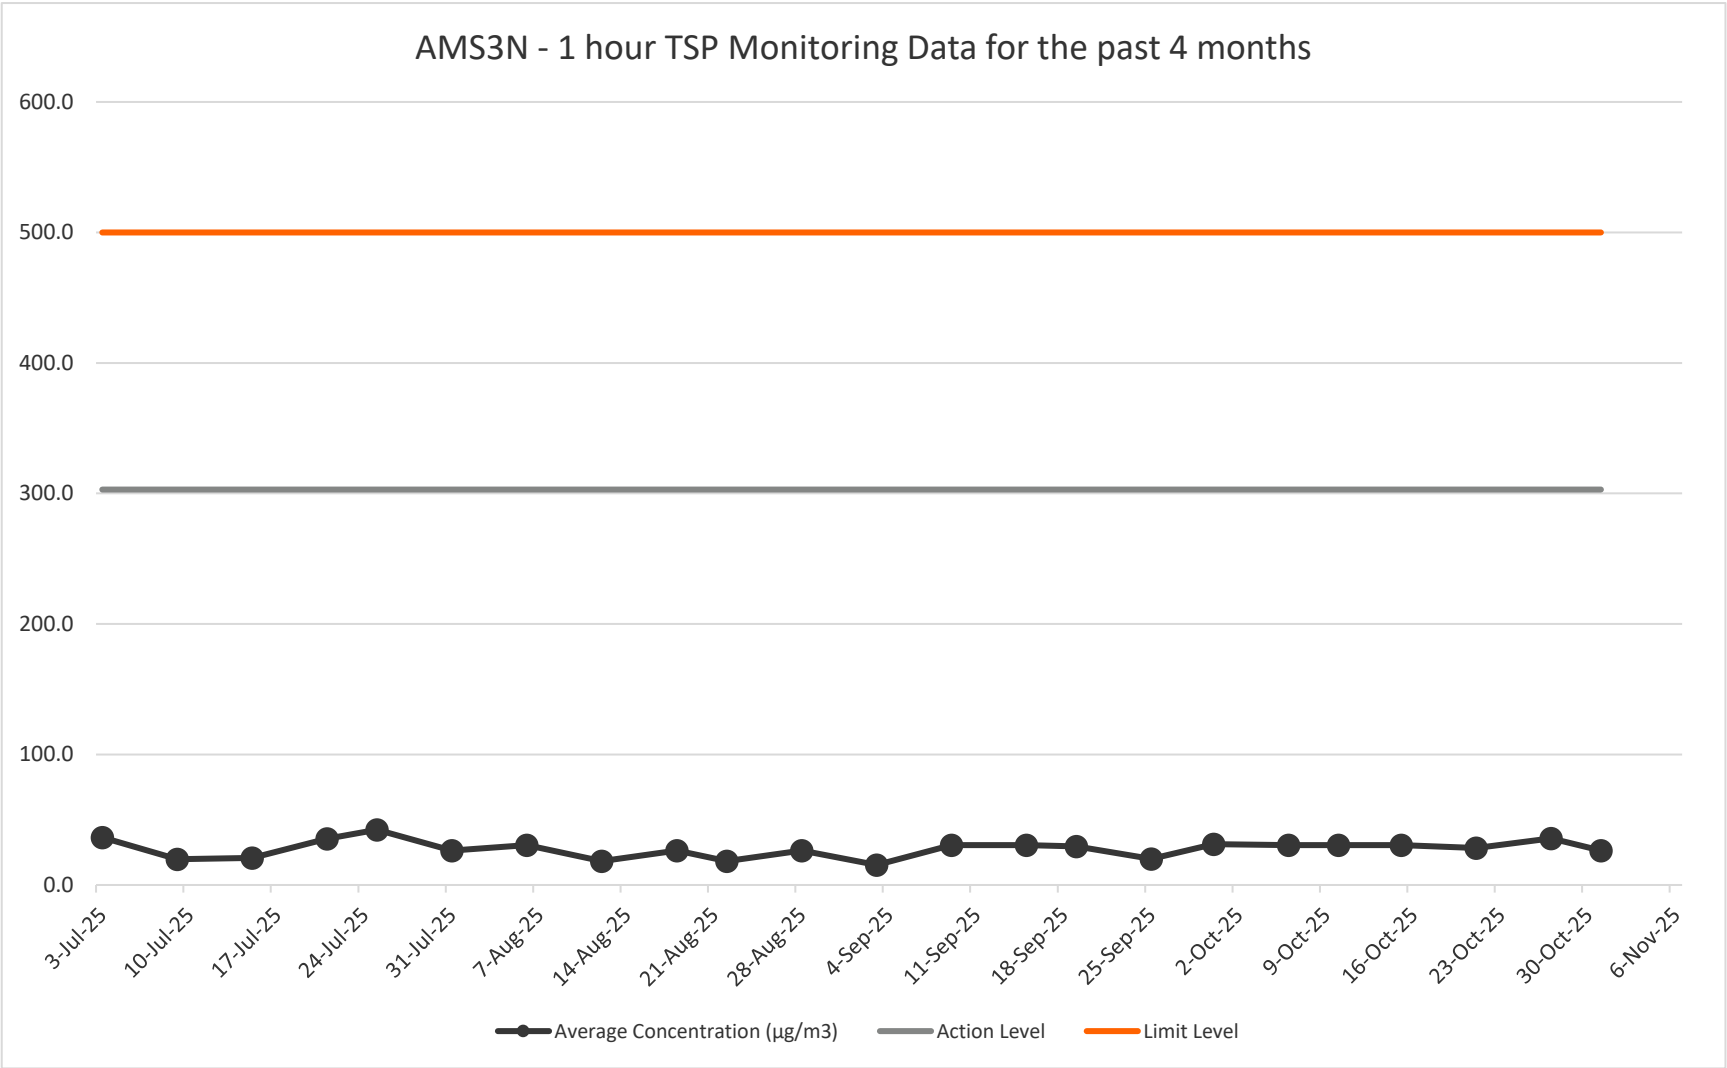

|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | G-9           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |

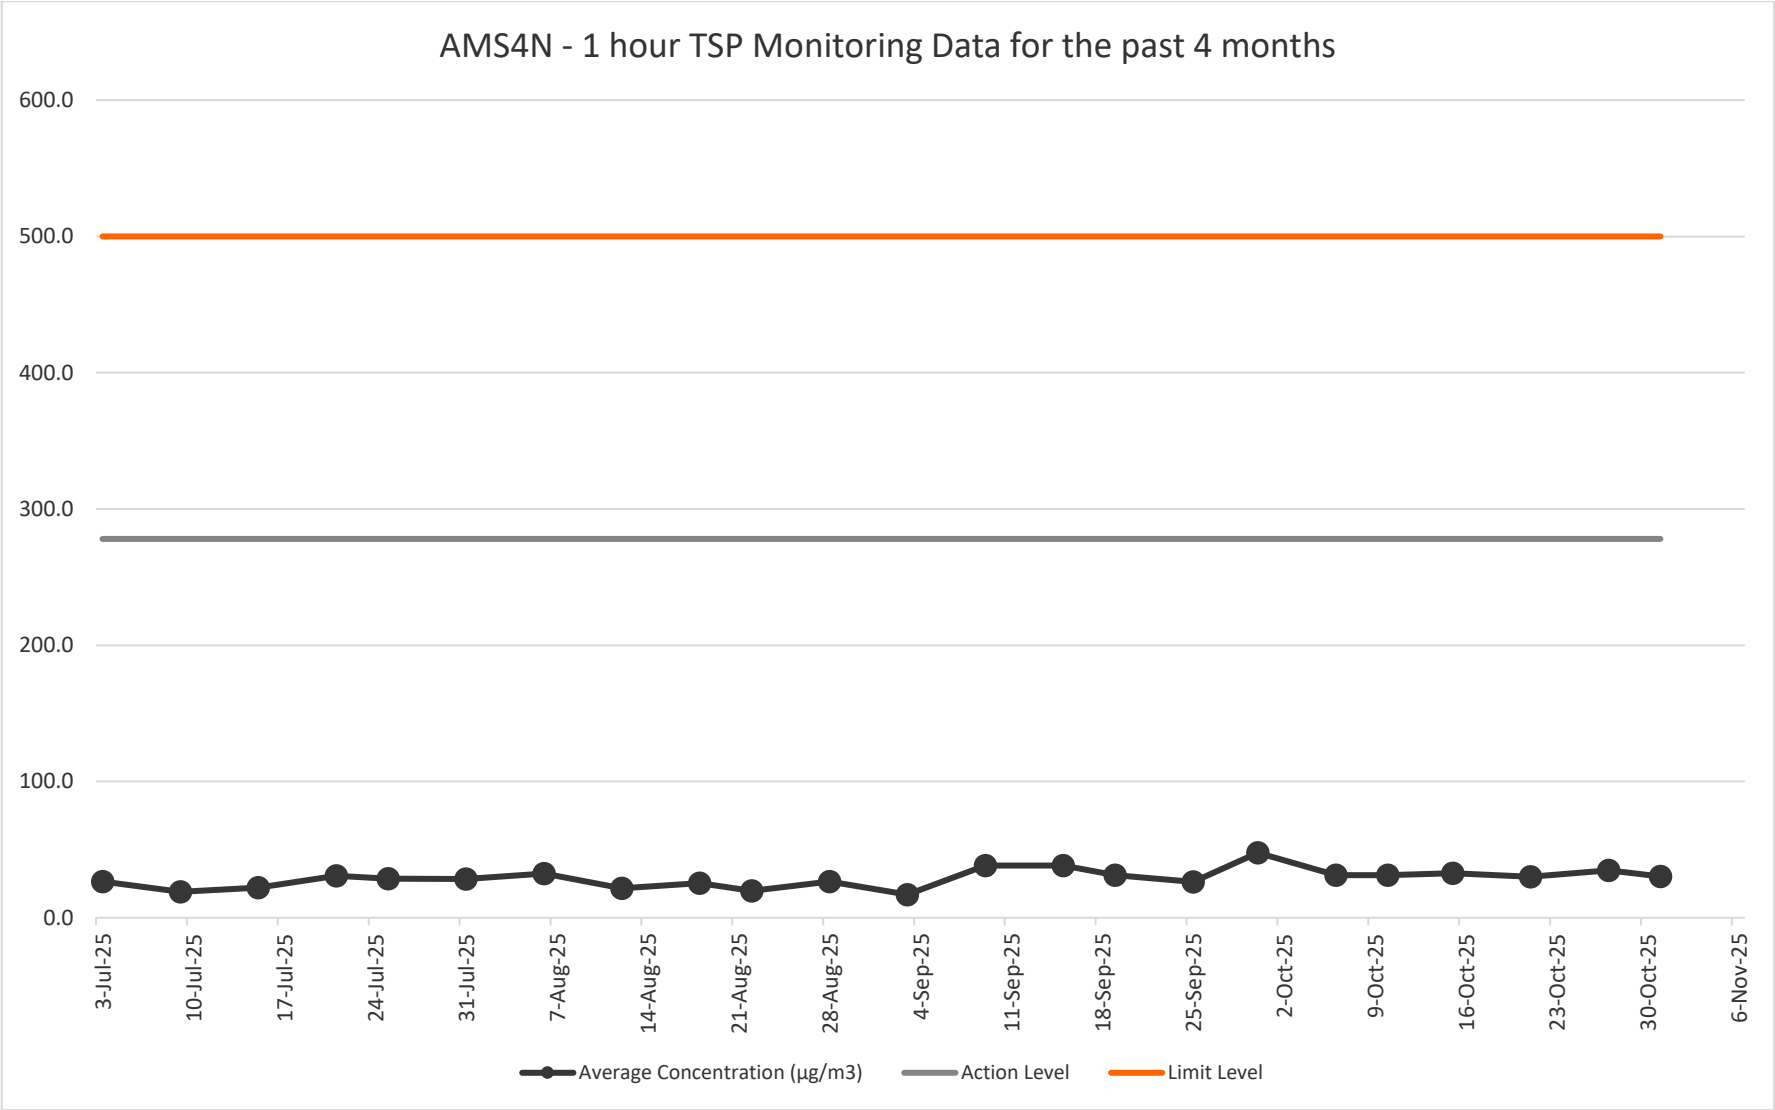


|                                                                                  |                                                                          |      |               |
|----------------------------------------------------------------------------------|--------------------------------------------------------------------------|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O | Page | G-10          |
|                                                                                  |                                                                          | Ref# | EMA2403/03/58 |
|                                                                                  | Monthly EM&A Report                                                      | Rev. | 01            |
|                                                                                  |                                                                          | Date | Nov 25        |

## Monthly Environmental Monitoring & Audit Report for Porter Shelter Phase 3, Po Toi O Sewage Treatment Plant

### 2025 October 24-hour TSP Monitoring Data

Monitoring Location: **AMS1N**

| Hour                                                           | 6- Oct -25 | 10- Oct -25 | 15- Oct -25 | 21- Oct -25 | 27- Oct -25 | 31- Oct -25 |
|----------------------------------------------------------------|------------|-------------|-------------|-------------|-------------|-------------|
| 1                                                              | 18         | 26          | 37          | 31          | 52          | 30          |
| 2                                                              | 31         | 25          | 35          | 27          | 59          | 27          |
| 3                                                              | 20         | 21          | 43          | 32          | 50          | 29          |
| 4                                                              | 41         | 17          | 38          | 47          | 51          | 27          |
| 5                                                              | 30         | 18          | 49          | 43          | 57          | 27          |
| 6                                                              | 16         | 17          | 41          | 25          | 54          | 24          |
| 7                                                              | 31         | 16          | 32          | 34          | 35          | 23          |
| 8                                                              | 25         | 18          | 53          | 27          | 41          | 22          |
| 9                                                              | 32         | 19          | 45          | 40          | 60          | 22          |
| 10                                                             | 31         | 19          | 44          | 39          | 49          | 21          |
| 11                                                             | 18         | 17          | 45          | 30          | 37          | 19          |
| 12                                                             | 20         | 15          | 53          | 47          | 62          | 19          |
| 13                                                             | 34         | 15          | 45          | 45          | 48          | 17          |
| 14                                                             | 16         | 16          | 49          | 33          | 64          | 16          |
| 15                                                             | 37         | 17          | 53          | 37          | 42          | 16          |
| 16                                                             | 16         | 18          | 34          | 37          | 40          | 18          |
| 17                                                             | 30         | 20          | 39          | 27          | 54          | 19          |
| 18                                                             | 29         | 26          | 54          | 41          | 46          | 21          |
| 19                                                             | 24         | 29          | 34          | 25          | 52          | 25          |
| 20                                                             | 21         | 24          | 41          | 42          | 41          | 26          |
| 21                                                             | 24         | 22          | 37          | 37          | 50          | 25          |
| 22                                                             | 19         | 18          | 46          | 46          | 46          | 28          |
| 23                                                             | 22         | 22          | 44          | 26          | 51          | 25          |
| 24                                                             | 37         | 23          | 30          | 41          | 41          | 24          |
| Average:                                                       | 26         | 20          | 43          | 36          | 49          | 23          |
| 24-hr TSP<br>( $\mu\text{g}/\text{m}^3$ ; with correlation(x)) | 32         | 25          | 50          | 42          | 56          | 28          |
| Action Level:                                                  | 153        |             |             |             |             |             |
| Limit Level:                                                   | 260        |             |             |             |             |             |


|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | G-11          |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |

## Monthly Environmental Monitoring & Audit Report for Porter Shelter Phase 3, Po Toi O Sewage Treatment Plant

### 2025 October 24-hour TSP Monitoring Data

**Monitoring Location: AMS2N1**

| Hour                                                           | 6- Oct -25 | 10- Oct -25 | 15- Oct -25 | 21- Oct -25 | 27- Oct -25 | 31- Oct -25 |
|----------------------------------------------------------------|------------|-------------|-------------|-------------|-------------|-------------|
| 1                                                              | 32         | 24          | 45          | 40          | 58          | 31          |
| 2                                                              | 31         | 20          | 37          | 37          | 56          | 24          |
| 3                                                              | 14         | 18          | 39          | 45          | 61          | 30          |
| 4                                                              | 38         | 18          | 54          | 32          | 66          | 28          |
| 5                                                              | 35         | 19          | 38          | 27          | 59          | 25          |
| 6                                                              | 20         | 17          | 47          | 45          | 65          | 24          |
| 7                                                              | 33         | 17          | 56          | 34          | 52          | 22          |
| 8                                                              | 22         | 18          | 39          | 34          | 46          | 22          |
| 9                                                              | 30         | 17          | 59          | 31          | 42          | 21          |
| 10                                                             | 26         | 20          | 46          | 47          | 65          | 20          |
| 11                                                             | 30         | 18          | 59          | 40          | 53          | 19          |
| 12                                                             | 29         | 17          | 58          | 34          | 45          | 18          |
| 13                                                             | 20         | 15          | 51          | 41          | 52          | 19          |
| 14                                                             | 27         | 16          | 37          | 33          | 59          | 18          |
| 15                                                             | 34         | 16          | 61          | 51          | 60          | 18          |
| 16                                                             | 29         | 19          | 49          | 30          | 56          | 19          |
| 17                                                             | 17         | 21          | 60          | 32          | 59          | 21          |
| 18                                                             | 13         | 23          | 42          | 30          | 52          | 23          |
| 19                                                             | 36         | 25          | 37          | 43          | 41          | 20          |
| 20                                                             | 20         | 21          | 48          | 34          | 46          | 20          |
| 21                                                             | 15         | 20          | 46          | 41          | 52          | 22          |
| 22                                                             | 18         | 19          | 56          | 44          | 46          | 23          |
| 23                                                             | 37         | 23          | 39          | 43          | 63          | 22          |
| 24                                                             | 18         | 20          | 50          | 33          | 58          | 23          |
| Average:                                                       | 26         | 19          | 48          | 38          | 55          | 22          |
| 24-hr TSP<br>( $\mu\text{g}/\text{m}^3$ ; with correlation(x)) | 33         | 26          | 56          | 46          | 64          | 29          |
| Action Level:                                                  | 179        |             |             |             |             |             |
| Limit Level:                                                   | 260        |             |             |             |             |             |


|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | G-12          |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |

## Monthly Environmental Monitoring & Audit Report for Porter Shelter Phase 3, Po Toi O Sewage Treatment Plant

### 2025 October 24-hour TSP Monitoring Data

**Monitoring Location: AMS3N**

| Hour                                                           | 6- Oct -25 | 10- Oct -25 | 15- Oct -25 | 21- Oct -25 | 27- Oct -25 | 31- Oct -25 |
|----------------------------------------------------------------|------------|-------------|-------------|-------------|-------------|-------------|
| 1                                                              | 36         | 28          | 23          | 19          | 25          | 35          |
| 2                                                              | 28         | 27          | 41          | 39          | 34          | 33          |
| 3                                                              | 32         | 25          | 36          | 19          | 37          | 34          |
| 4                                                              | 41         | 24          | 26          | 32          | 48          | 34          |
| 5                                                              | 33         | 22          | 44          | 20          | 33          | 33          |
| 6                                                              | 26         | 24          | 40          | 22          | 44          | 30          |
| 7                                                              | 30         | 23          | 26          | 38          | 30          | 28          |
| 8                                                              | 34         | 22          | 38          | 18          | 25          | 28          |
| 9                                                              | 20         | 21          | 39          | 28          | 39          | 27          |
| 10                                                             | 40         | 23          | 35          | 19          | 38          | 25          |
| 11                                                             | 24         | 23          | 19          | 18          | 40          | 23          |
| 12                                                             | 42         | 21          | 33          | 19          | 40          | 22          |
| 13                                                             | 30         | 20          | 23          | 37          | 47          | 21          |
| 14                                                             | 26         | 22          | 27          | 24          | 33          | 20          |
| 15                                                             | 30         | 20          | 42          | 26          | 46          | 22          |
| 16                                                             | 41         | 25          | 36          | 34          | 44          | 22          |
| 17                                                             | 43         | 29          | 23          | 17          | 36          | 25          |
| 18                                                             | 21         | 27          | 29          | 21          | 27          | 26          |
| 19                                                             | 34         | 30          | 22          | 30          | 32          | 27          |
| 20                                                             | 21         | 27          | 36          | 32          | 24          | 25          |
| 21                                                             | 40         | 30          | 28          | 32          | 31          | 29          |
| 22                                                             | 44         | 24          | 37          | 38          | 44          | 28          |
| 23                                                             | 33         | 25          | 42          | 35          | 38          | 30          |
| 24                                                             | 45         | 29          | 32          | 27          | 26          | 23          |
| Average:                                                       | 33         | 25          | 32          | 27          | 36          | 27          |
| 24-hr TSP<br>( $\mu\text{g}/\text{m}^3$ ; with correlation(x)) | 31         | 23          | 30          | 25          | 35          | 25          |
| Action Level:                                                  | 158        |             |             |             |             |             |
| Limit Level:                                                   | 260        |             |             |             |             |             |

|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | G-13          |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |


## Monthly Environmental Monitoring & Audit Report for Porter Shelter Phase 3, Po Toi O Sewage Treatment Plant

### 2025 October 24-hour TSP Monitoring Data

Monitoring Location: **AMS4N**


| Hour                                                           | 6- Oct -25 | 10- Oct -25 | 15- Oct -25 | 21- Oct -25 | 27- Oct -25 | 31- Oct -25 |
|----------------------------------------------------------------|------------|-------------|-------------|-------------|-------------|-------------|
| 1                                                              | 35         | 22          | 26          | 37          | 34          | 29          |
| 2                                                              | 37         | 19          | 36          | 20          | 22          | 25          |
| 3                                                              | 31         | 20          | 44          | 39          | 24          | 29          |
| 4                                                              | 21         | 16          | 42          | 36          | 31          | 27          |
| 5                                                              | 26         | 17          | 35          | 31          | 39          | 26          |
| 6                                                              | 26         | 18          | 44          | 43          | 36          | 25          |
| 7                                                              | 17         | 19          | 37          | 41          | 29          | 21          |
| 8                                                              | 26         | 17          | 38          | 44          | 43          | 23          |
| 9                                                              | 39         | 18          | 24          | 43          | 47          | 24          |
| 10                                                             | 23         | 19          | 26          | 42          | 24          | 20          |
| 11                                                             | 26         | 14          | 29          | 35          | 38          | 18          |
| 12                                                             | 15         | 16          | 37          | 37          | 31          | 17          |
| 13                                                             | 25         | 14          | 37          | 28          | 34          | 16          |
| 14                                                             | 18         | 16          | 22          | 30          | 35          | 15          |
| 15                                                             | 19         | 14          | 21          | 33          | 30          | 16          |
| 16                                                             | 27         | 20          | 34          | 32          | 25          | 17          |
| 17                                                             | 37         | 21          | 33          | 34          | 43          | 20          |
| 18                                                             | 15         | 22          | 37          | 26          | 43          | 20          |
| 19                                                             | 14         | 21          | 24          | 32          | 24          | 21          |
| 20                                                             | 27         | 22          | 24          | 32          | 41          | 19          |
| 21                                                             | 39         | 20          | 36          | 33          | 37          | 24          |
| 22                                                             | 29         | 17          | 45          | 28          | 32          | 24          |
| 23                                                             | 18         | 18          | 42          | 35          | 29          | 24          |
| 24                                                             | 22         | 24          | 23          | 36          | 34          | 23          |
| Average:                                                       | 26         | 19          | 33          | 34          | 34          | 22          |
| 24-hr TSP<br>( $\mu\text{g}/\text{m}^3$ ; with correlation(x)) | 32         | 25          | 39          | 40          | 40          | 28          |
| Action Level:                                                  | 144        |             |             |             |             |             |
| Limit Level:                                                   | 260        |             |             |             |             |             |


AMS1N 24-hour TSP Monitoring Data for the past 4 months

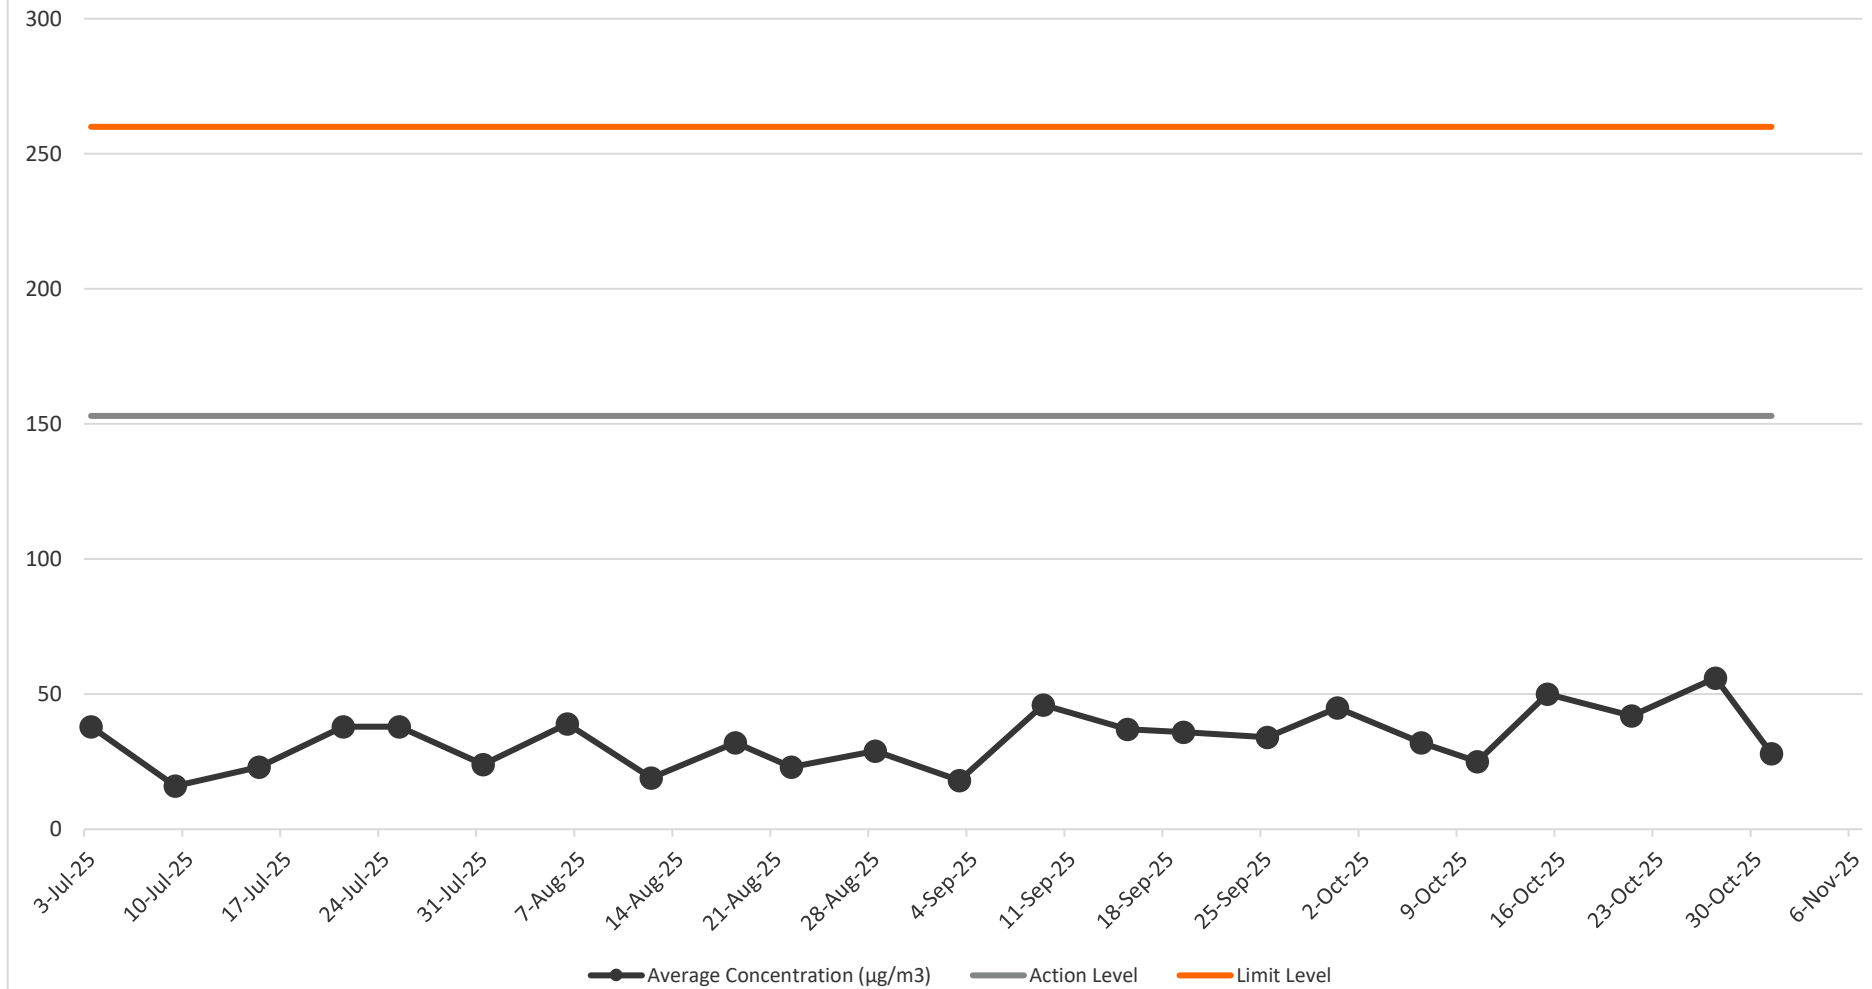


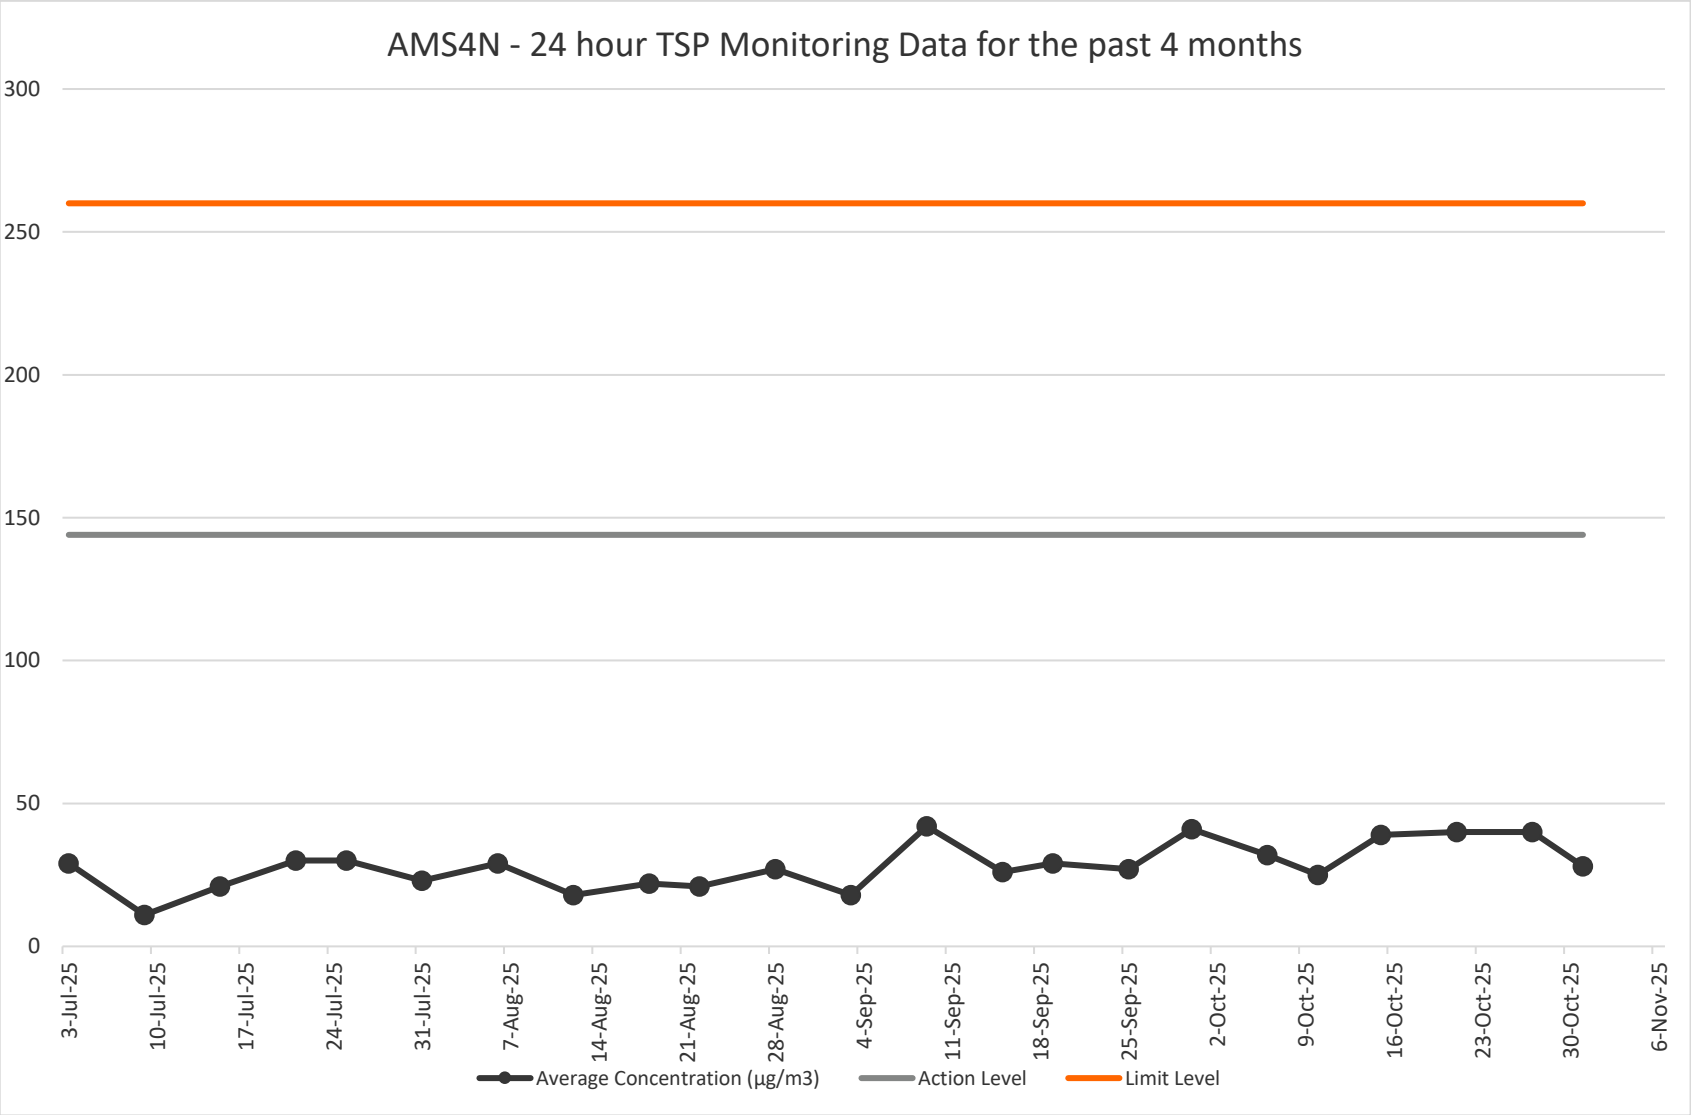



AMS2N1 24-hour TSP Monitoring Data for the past 4 months

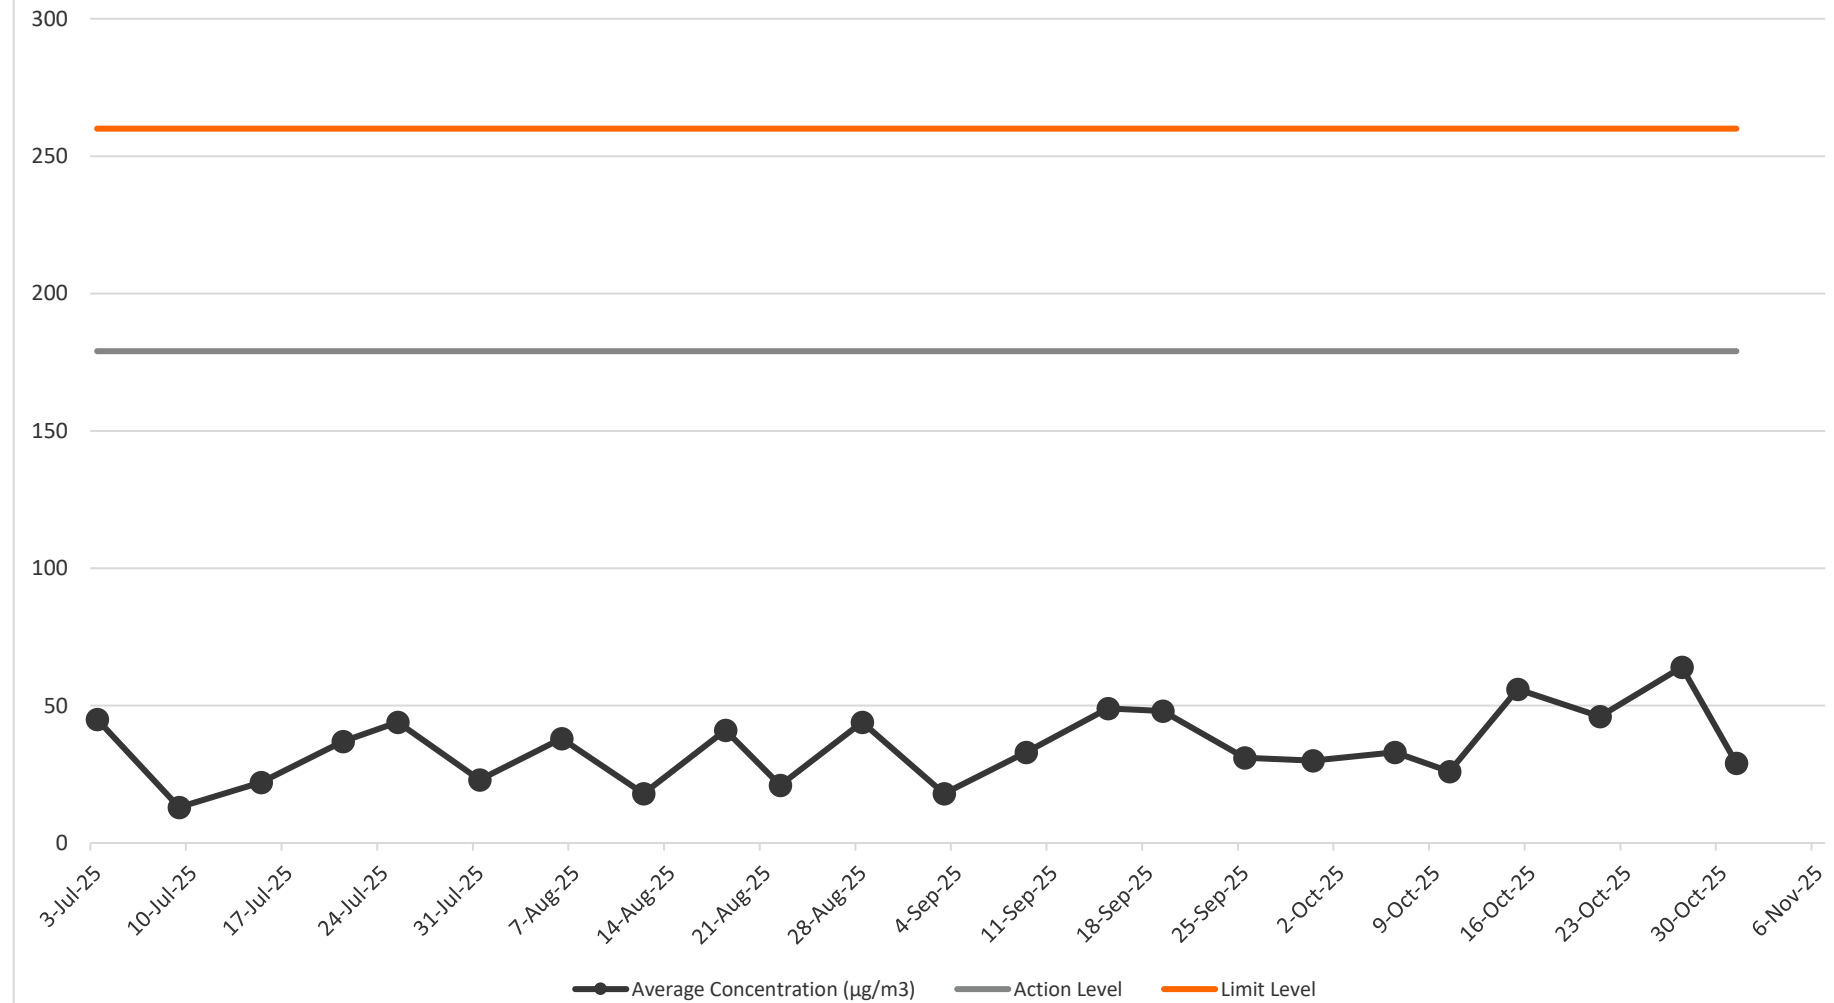

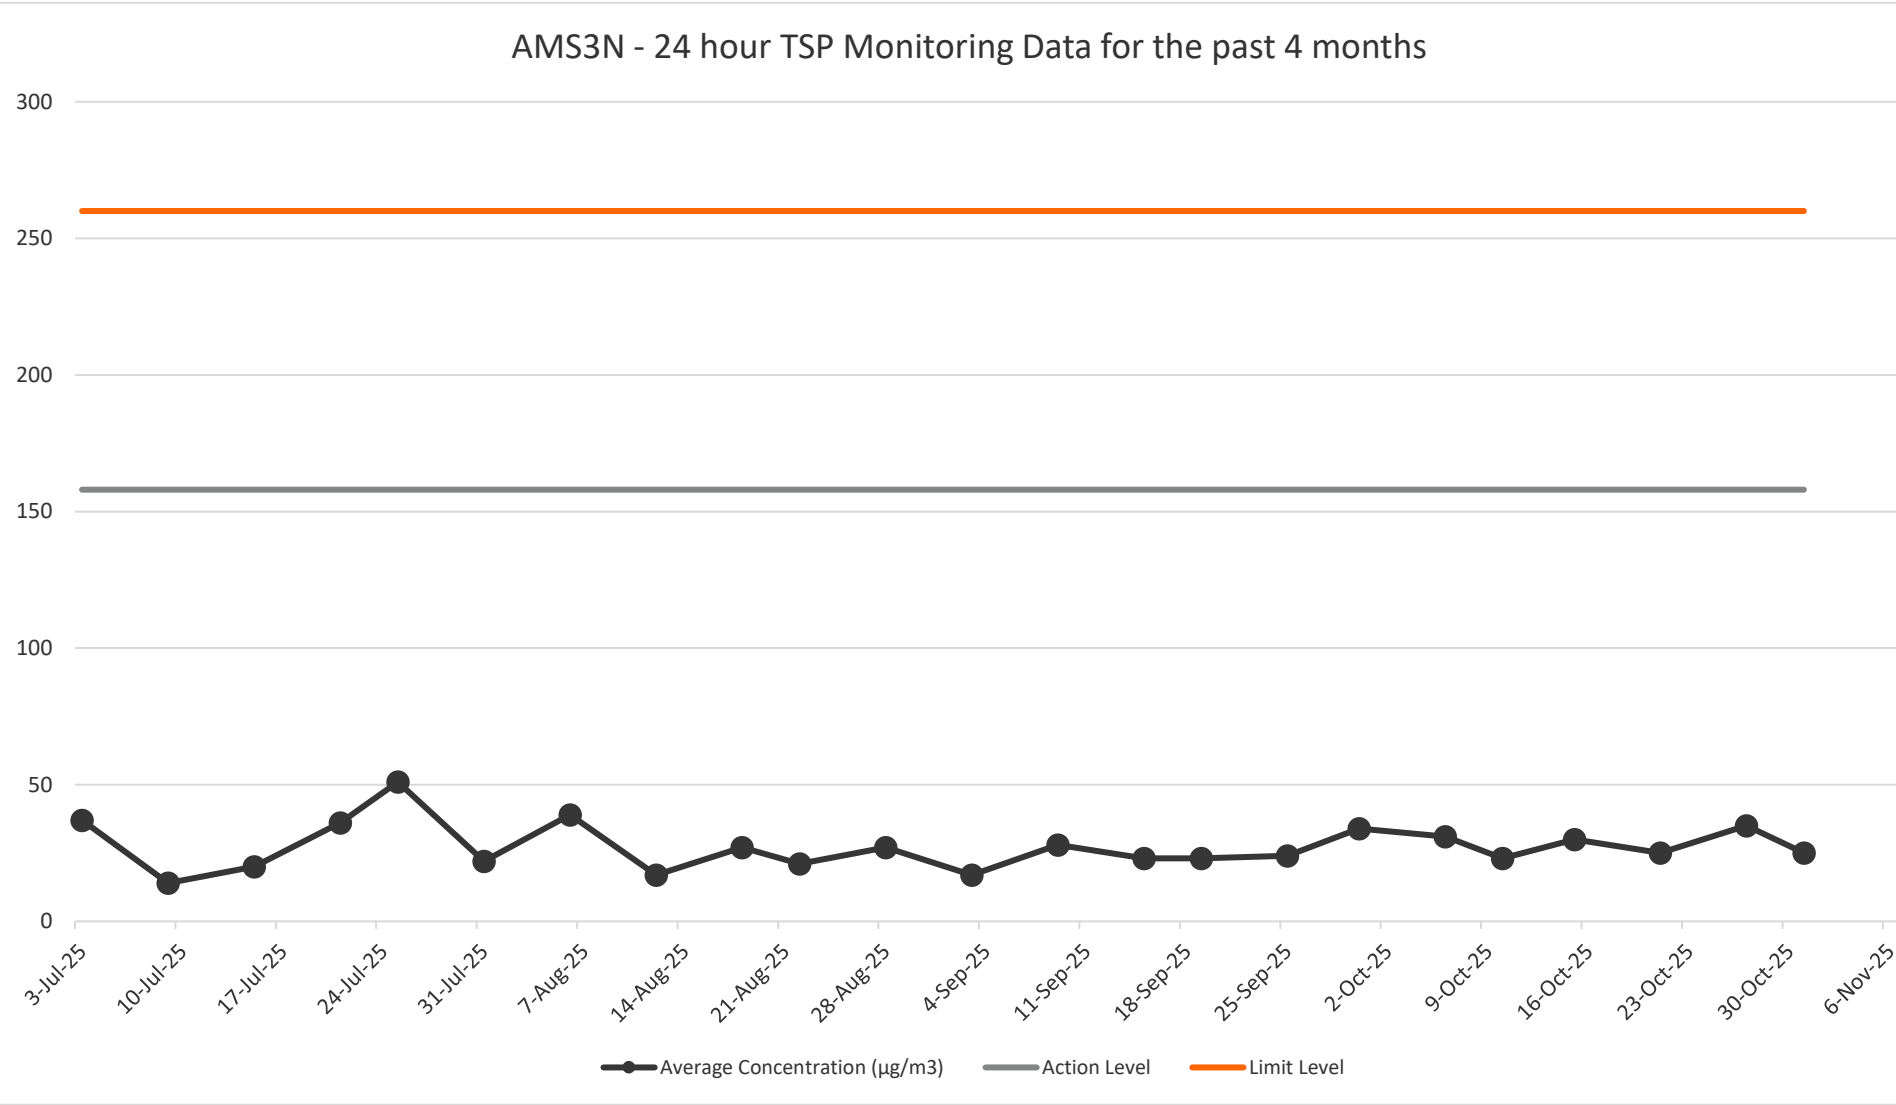


|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | G-16          |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |



|                                                                                   |                                                                                 |  |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|--|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> |  | Page | H-1           |
|                                                                                   |                                                                                 |  | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  |  | Rev. | 01            |
|                                                                                   |                                                                                 |  | Date | Nov 25        |


## APPENDIX H – EVENT AND ACTION PLAN

---


|                                                                                   |                                                                          |  |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  |  | Page | H-2           |
|                                                                                   |                                                                          |  |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  |  | Rev. | 01            |
|                                                                                   |                                                                          |  |  | Date | Nov 25        |

## AIR QUALITY MONITORING

| EVENT                                          | ACTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                |
|------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                | ET                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | IEC                                                                                                                                                                                                                                                                                                                                                                                                 | ER                                                                                                                                                                                                                                                                                                 | CONTRACTOR                                                                                                                                                                                                                                                                                                                                     |
| <b>ACTION LEVEL</b>                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                |
| Exceedance for one sample                      | <ol style="list-style-type: none"> <li>1. Repeat measurement to confirm findings;</li> <li>2. If exceedance is confirmed, inform the Contractor, IEC and ER;</li> <li>3. Identify source(s), investigate the causes of exceedance and propose remedial measures; and</li> <li>4. Increase monitoring frequency.</li> </ol>                                                                                                                                                                              | <ol style="list-style-type: none"> <li>1. Check monitoring data submitted by the ET;</li> <li>2. Check Contractor's working method; and</li> <li>3. Discuss with ET, ER and Contractor on possible remedial measures</li> <li>4. Review and advise the ET and ER on the effectiveness of the proposed remedial measures.</li> </ol>                                                                 | <ol style="list-style-type: none"> <li>1. Confirm receipt of notification of exceedance in writing.</li> </ol>                                                                                                                                                                                     | <ol style="list-style-type: none"> <li>1. Identify source(s), investigate the causes of exceedance and propose remedial measures;</li> <li>2. Implement remedial measures; and</li> <li>3. Amend working methods agreed with the ER as appropriate.</li> </ol>                                                                                 |
| Exceedance for two or more consecutive samples | <ol style="list-style-type: none"> <li>1. Repeat measurements to confirm findings;</li> <li>2. If exceedance is confirmed, inform Contractor, IEC and ER;</li> <li>3. Identify source(s), investigate the causes of exceedance and propose remedial measures;</li> <li>4. Increase monitoring frequency to daily;</li> <li>5. Advise the Contractor and ER on the effectiveness of the proposed remedial measures;</li> <li>6. Discuss with IEC and Contractor on remedial actions required;</li> </ol> | <ol style="list-style-type: none"> <li>1. Check monitoring data submitted by the ET;</li> <li>2. Check Contractor's working method; and</li> <li>3. Discuss with ET, ER and Contractor on possible remedial measures;</li> <li>4. Review and advise the ET and ER on the effectiveness of the proposed remedial measures; and</li> <li>5. Supervise Implementation of remedial measures.</li> </ol> | <ol style="list-style-type: none"> <li>1. Confirm receipt of notification of exceedance in writing;</li> <li>2. In consultation with the ET and IEC agree with the Contractor on the remedial measures to be implemented; and</li> <li>3. Supervise implementation of remedial measures</li> </ol> | <ol style="list-style-type: none"> <li>1. Identify source(s) and investigate the causes of exceedance;</li> <li>2. Submit proposals for remedial measures to the ER, ET and IEC within three working days of notification for agreement;</li> <li>3. Implement the agreed proposals; and</li> <li>4. Amend proposal as appropriate.</li> </ol> |

|                                                                                   |                                                                          |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  | Page | H-3           |
|                                                                                   |                                                                          |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  | Rev. | 01            |
|                                                                                   |                                                                          |  | Date | Nov 25        |


| EVENT                                          | ACTION                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                 |
|------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                | ET                                                                                                                                                                                                                                                                                                                                                           | IEC                                                                                                                                                                                                                                                                                                                       | ER                                                                                                                                                                                                | CONTRACTOR                                                                                                                                                                                                                                                                                                                      |
|                                                | 7. If exceedance continues, arrange meeting with Contractor, IEC and ER to discuss the remedial measures to be taken; and<br>8. If exceedance stops, cease additional monitoring.                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                 |
| <b>LIMIT LEVEL</b>                             |                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                 |
| Exceedance for one sample                      | 1. Repeat measurement to confirm findings;<br>2. If exceedance is confirmed, inform the Contractor, IEC, EPD and ER;<br>3. Identify source(s), investigate the causes of exceedance and propose remedial;<br>4. Increase monitoring frequency to daily; and<br>5. Discuss with the ER, IEC and Contractor on the remedial measures and assess effectiveness. | 1. Check monitoring data submitted by the ET;<br>2. Check Contractor's working method;<br>3. Discuss with the ET, ER and Contractor on possible remedial measures;<br>4. Review and advise the ET and ER on the effectiveness of the proposed remedial measures; and<br>5. Supervise implementation of remedial measures. | 1. Confirm receipt of notification of exceedance in writing;<br>2. Review and agree on the remedial measures proposed by the Contractor; and<br>3. Ensure remedial measures properly implemented. | 1. Identify source(s) and investigate the causes of exceedance;<br>2. Take immediate action to avoid further exceedance;<br>3. Submit proposals for remedial measures to ER, ET and IEC within three working days of notification for agreement;<br>4. Implement the agreed proposals; and<br>5. Amend proposal if appropriate. |
| Exceedance for two or more consecutive samples | 1. Repeat measurement to confirm findings;<br>2. If exceedance is confirmed, inform IEC, ER, Contractor and EPD;<br>3. Identify source(s), investigate the causes of                                                                                                                                                                                         | 1. Check monitoring data submitted by the ET;<br>2. Discuss amongst ER, ET, and Contractor on the potential remedial actions;                                                                                                                                                                                             | 1. Confirm receipt of notification of exceedance in writing;<br>2. In consultation with the ET and IEC, agree with the Contractor on the remedial measures to be implemented;                     | 1. Identify source(s) and investigate the causes of exceedance;<br>2. Take immediate action to avoid further exceedance;<br>3. Submit proposals for remedial measures to the                                                                                                                                                    |

|                                                                                   |                                                                          |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  | Page | H-4           |
|                                                                                   |                                                                          |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  | Rev. | 01            |
|                                                                                   |                                                                          |  | Date | Nov 25        |

| EVENT | ACTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                 |                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                               |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       | ET                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | IEC                                                                                                                                                                                             | ER                                                                                                                                                                                                                                            | CONTRACTOR                                                                                                                                                                                                                                                                                                    |
|       | <p>exceedance and propose remedial measures;</p> <p>4. Increase monitoring frequency to daily;</p> <p>5. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented;</p> <p>6. Arrange meeting with IEC and ER to discuss the remedial actions to be taken;</p> <p>7. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; and</p> <p>8. If exceedance stops, cease additional monitoring.</p> | <p>3. Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly; and</p> <p>4. Supervise the implementation of remedial measures.</p> | <p>3. Supervise the implementation of remedial measures; and</p> <p>4. If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated.</p> | <p>ER, IEC and ET within three working days of notification for agreement;</p> <p>4. Implement the agreed proposals;</p> <p>5. Revise and resubmit proposals if problem still not under control; and</p> <p>6. Stop the relevant portion of works as determined by the ER until the exceedance is abated.</p> |


Note: ET – Environmental Team; ER – Engineer's Representative; IEC – Independent Environmental Checker




|                                                                                  |                                                                                 |  |      |               |
|----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|--|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> |  | Page | H-5           |
|                                                                                  |                                                                                 |  | Ref# | EMA2403/03/58 |
|                                                                                  | <b>Monthly EM&amp;A Report</b>                                                  |  | Rev. | 01            |
|                                                                                  |                                                                                 |  | Date | Nov 25        |

## NOISE IMPACT MONITORING

| Event        | Action                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                           |                                                                                                                                                                                                                                  |                                                                                                              |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
|              | ET                                                                                                                                                                                                                                                                                                                                                                            | IEC                                                                                                                                                                                                       | ER                                                                                                                                                                                                                               | CONTRACTOR                                                                                                   |
| Action Level | 1. Notify IEC, ER and Contractor of exceedance;<br>2. Identify source<br>3. Investigate the causes of exceedance and propose remedial measures;<br>4. Report the results of investigation to the IEC, ER and Contractor;<br>5. Discuss with the IEC, ER and Contractor and formulate remedial measures;<br>6. Increase monitoring frequency to check mitigation effectiveness | 1. Review the analysed results submitted by the ET;<br>2. Review the proposed remedial measures by the Contractor and advise the ER accordingly;<br>3. Supervise the implementation of remedial measures. | 1. Confirm receipt of notification of failure in writing;<br>2. Notify Contractor;<br>3. Require Contractor to propose remedial measures for the analysed noise problem;<br>4. Ensure remedial measures are properly implemented | 1. Submit noise mitigation proposals to ER with copy to ET and IEC;<br>Implement noise mitigation proposals. |


|                                                                                   |                                                                                 |  |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|--|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> |  | Page | H-6           |
|                                                                                   |                                                                                 |  | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  |  | Rev. | 01            |
|                                                                                   |                                                                                 |  | Date | Nov 25        |

| Event       | Action                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                              |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             | ET                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | IEC                                                                                                                                                                                                                                                              | ER                                                                                                                                                                                                                                                                                                                                                                                                              | CONTRACTOR                                                                                                                                                                                                                                                                                                                                                                   |
| Limit Level |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                              |
|             | 1. Inform IEC, ER, EPD and Contractor;<br>2. Identify source;<br>3. Repeat measurements to confirm findings;<br>4. Increase monitoring frequency;<br>5. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented;<br>6. Inform IEC, ER and EPD the causes and actions taken for the exceedances;<br>7. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results;<br>8. If exceedance stops, cease additional monitoring. | 1. Discuss amongst ER, ET, and Contractor on the potential remedial actions;<br>2. Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly;<br>3. Supervise the implementation of remedial measures. | 1. Confirm receipt of notification of failure in writing;<br>2. Notify Contractor;<br>3. Require Contractor to propose remedial measures for the analyzed noise problem;<br>4. Ensure remedial measures are properly implemented;<br>5. If exceedance continues, investigate what portion of the work is responsible and instruct the Contractor to terminate that portion of work until the exceedance ceases. | 1. Take immediate action to avoid further exceedance;<br>2. Submit proposals for remedial actions to ER with copy to ET and IEC within 3 working days of notification;<br>3. Implement the agreed proposals;<br>4. Resubmit proposals if problem still not under control;<br>5. Terminate the relevant portion of works as determined by the ER until the exceedance ceases. |


|                                                                                   |                                                                          |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  | Page | H-7           |
|                                                                                   |                                                                          |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  | Rev. | 01            |
|                                                                                   |                                                                          |  | Date | Nov 25        |

## Water Quality Monitoring


| Event                                                                  | Action                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                        | ET                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | IEC                                                                                                                                                                                                                                                                                                                                                                              | ER                                                                                                                                                                                                                                                                                                                                                  | CONTRACTOR                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Action Level being exceeded by one sampling day                        | <ol style="list-style-type: none"> <li>1. Repeat in situ measurement on next day of exceedance to confirm findings;</li> <li>2. Identify source(s) of impact;</li> <li>3. Inform IEC, contractor and ER;</li> <li>4. Check monitoring data, all plant, equipment and Contractor's working methods.</li> <li>5. Discuss mitigation measures with IEC and Contractor.</li> </ol>                                                                                                                                                     | <ol style="list-style-type: none"> <li>1. Check monitoring data submitted by ET and Contractor's working methods.</li> <li>2. Discuss with ET and Contractor on possible remedial actions.</li> <li>3. Review the proposed mitigation measures submitted by Contractor and advise the ER accordingly.</li> </ol>                                                                 | <ol style="list-style-type: none"> <li>1. Confirm receipt of notification of non-compliance in writing;</li> <li>2. Notify Contractor;</li> <li>3. Discuss with IEC on possible remedial actions;</li> <li>4. Make agreement on the mitigation measures to be implemented.</li> </ol>                                                               | <ol style="list-style-type: none"> <li>1. Inform the ER and confirm notification of the non-compliance in writing;</li> <li>2. Rectify unacceptable practice;</li> <li>3. Check all plant and equipment and consider changes of working methods;</li> <li>4. Submit proposal of mitigation measures to ER within 3 working days of notification and discuss with ET, IEC and ER.</li> <li>5. Implement the agreed mitigation measures.</li> </ol> |
| Action Level being exceeded by more than one consecutive sampling days | <ol style="list-style-type: none"> <li>1. Repeat measurement on next day of exceedance to confirm findings;</li> <li>2. Identify source(s) of impact;</li> <li>3. Inform IEC, contractor and ER and EPD;</li> <li>4. Check monitoring data, all plant, equipment and Contractor's working methods.</li> <li>5. Discuss mitigation measures with IEC and Contractor;</li> <li>6. Ensure mitigation measures are implemented;</li> <li>7. Increase the monitoring frequency to daily until no exceedance of Action level.</li> </ol> | <ol style="list-style-type: none"> <li>1. Check monitoring data submitted by ET and Contractor's working method;</li> <li>2. Discuss with ET and Contractor on possible remedial actions.</li> <li>3. Review the proposed mitigation measures submitted by Contractor and advise the ER accordingly;</li> <li>4. Supervise the implementation of mitigation measures.</li> </ol> | <ol style="list-style-type: none"> <li>1. Discuss with IEC on the proposed mitigation measures;</li> <li>2. Make agreement on the mitigation measures to be implemented;</li> <li>3. Ensure mitigation measures are properly implemented by the Contractor;</li> <li>4. Assess the effectiveness of the implemented mitigation measures.</li> </ol> | <ol style="list-style-type: none"> <li>1. Inform the ER and confirm notification of the non-compliance in writing;</li> <li>2. Rectify unacceptable practice;</li> <li>3. Check all plant and equipment and consider changes of working methods;</li> <li>4. Submit proposal of mitigation measures to ER within 3 working days of notification and discuss with ET, IEC and ER.</li> <li>5. Implement the agreed mitigation measures.</li> </ol> |

|                                                                                   |                                                                          |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  | Page | H-8           |
|                                                                                   |                                                                          |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  | Rev. | 01            |
|                                                                                   |                                                                          |  | Date | Nov 25        |

| Event                                          | Action                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                   |                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                         |
|------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                | ET                                                                                                                                                                                                                                                                                           | IEC                                                                                                                                                                                                                                               | ER                                                                                                                                                                                                      | CONTRACTOR                                                                                                                                                                                                                                                                                                              |
| Limit Level being exceeded by one sampling day | 1. Repeat measurement on next day of exceedance to confirm findings;<br>2. Identify source(s) of impact;<br>3. Inform IEC, contractor and ER;<br>4. Check monitoring data, all plant, equipment and Contractor's working methods.<br>5. Discuss mitigation measures with IEC and Contractor. | 1. Check monitoring data submitted by ET and Contractor's working method;<br>2. Discuss with ET and Contractor on possible remedial actions.<br>3. Review the proposed mitigation measures submitted by Contractor and advise the ER accordingly. | 1. Confirm receipt of notification of non-compliance in writing;<br>2. Discuss with IEC, ET and Contractor on the proposed mitigation measures;<br>3. Request Contractor to review the working methods. | 1. Inform the ER and confirm notification of the non-compliance in writing;<br>2. Rectify unacceptable practice;<br>3. Check all plant and equipment and consider changes of working methods;<br>4. Submit proposal of mitigation measures to ER within 3 working days of notification and discuss with ET, IEC and ER. |

|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | H-9           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |

|                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Limit Level being exceeded by more than one consecutive sampling days | 1. Repeat measurement on next day of exceedance to confirm findings;<br>2. Identify source(s) of impact;<br>3. Inform IEC, contractor and ER and EPD;<br>4. Check monitoring data, all plant, equipment and Contractor's working methods.<br>5. Discuss mitigation measures with IEC and Contractor;<br>6. Ensure mitigation measures are implemented;<br>7. Increase the monitoring frequency to daily until no exceedance of Limit level for two consecutive days. | 1. Check monitoring data submitted by ET and Contractor's working method;<br>2. Discuss with ET and Contractor on possible remedial actions.<br>3. Review the Contractor's mitigation measures whenever necessary to assure their effectiveness and advise the ER accordingly;<br>4. Supervise the implementation of mitigation measures. | 1. Discuss with IEC, ET and Contractor on the proposed mitigation measures;<br>2. Request Contractor to critically review the working methods;<br>3. Make agreement on the mitigation measures to be implemented;<br>4. Ensure mitigation measures are properly implemented;<br>5. Consider and instruct, if necessary, the Contractor to slow down or stop all or part of the construction activities until no exceedance of Limit Level. | 1. Inform the ER and confirm notification of the non-compliance in writing;<br>2. Take immediate action to avoid further exceedance;<br>3. Check all plant and equipment and consider changes of working methods;<br>4. Submit proposal of mitigation measures to ER within 3 working days of notification and discuss with ET, IEC and ER.<br>5. Implement the agreed mitigation measures;<br>6. Resubmit proposals of mitigation measures if problem still not under control;<br>7. As directed by the Supervising Officer, to slow down or stop all or part of the construction activities until no exceedance of Limit Level |
|-----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | I-1           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |

## APPENDIX I - NOISE MONITORING EQUIPMENT CALIBRATION CERTIFICATES

---



東業德勤測試顧問有限公司  
ETS-TESTCONSULT LTD.™

8/F Block B,  
Veristrong Industrial Centre,  
34-36 Au Pui Wan Street,  
Fo Tan, Hong Kong  
T: +852 2695 8318  
F: +852 2695 3944  
E: [etl@ets-testconsult.com](mailto:etl@ets-testconsult.com)  
W: [www.ets-testconsult.com](http://www.ets-testconsult.com)



Form Q/AS/C/02 Issue 1(1/4) [02/22]

## Calibration Certificate

Certificate No. : CSA53631

Page : 1 of 2

### Information Provided by Customer

Customer : ETS - Testconsult Limited  
Address : 8/F., Block B, Veristrong Industrial Centre, 34 - 36 Au Pui Wan Street, Fotsan, Shatin, Hong Kong

### Information of Unit-under-test (UUT)

Description : Sound Level Calibrator  
Manufacturer : Castle  
Type : GA607  
Equipment I.D. : ET/EN/002/07  
Serial No. : 038641

### Laboratory Information

Lab. Ref. No. : Q/CAL/25/4051/I  
Date of Calibration : 22-May-2025  
Date of Issue : 26-May-2025  
Procedure : CQS/002/A  
Date of Receipt : 15-May-2025  
Calibration Location : Calibration Laboratory

### Calibration Condition

Ambient Temperature : (20 ± 3) °C  
Stabilizing Time : 30 minutes  
Ambient Pressure : (1000 ± 50) hPa  
Relative Humidity : (50±20) %  
Sampling : As received

### Reference equipment

- Multi-function sound calibrator, ET/2801/01
- Measuring Amplifier, ET/2702/01/01
- Signal generator, ET/2503/01
- Reference Oscilloscope, ET/2502/01

### Calibration specification

- To perform the calibration of sound level calibrator,

### Calibration result

- The results are detailed on the subsequent pages.

### Remarks

- The calibration results apply to the particular unit-under-test only,
- The values given in this calibration certificate only to the values measured at the time of test & any uncertainties quoted will not include allowance for the equipment long term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement

Calibrated By : Tommy TAM  
(Technician)

Approved By: CHAN Chi Wai





東業德勤測試顧問有限公司  
**ETS-TESTCONSULT LTD.**

8/F Block B,  
Versorong Industrial Centre,  
34-36 Au Pui Wan Street,  
Fo Tan, Hong Kong  
T: +852 2695 8318  
F: +852 2695 3944  
E: ets@ets-testconsult.com  
W: www.ets-testconsult.com



Form QIAS/C/02 Issue 1(2/4) [02/22]

## Calibration Certificate

Certificate No. : **CSA53631**

Page : 2 of 2

### Calibration Result:

#### 1. Measured Sound Pressure Level:

| Reference Frequency (Hz) | Reference Output Sound Pressure (dB) | UUT Nominal Output Sound Pressure (dB) | Measured UUT Output (dB) | Expanded Uncertainty (dB) | Coverage Factor |
|--------------------------|--------------------------------------|----------------------------------------|--------------------------|---------------------------|-----------------|
| 1000                     | 93.9                                 | 94.0                                   | 93.9                     | 0.13                      | 2.0             |
| 1000                     | 103.9                                | 104.0                                  | 103.8                    | 0.13                      | 2.0             |

#### 2. Actual Output Frequency:

| UUT Nominal Frequency (Hz) | UUT Nominal Output Sound Pressure (dB) | Measured UUT Output (Hz) | Expanded Uncertainty (Hz) | Coverage Factor |
|----------------------------|----------------------------------------|--------------------------|---------------------------|-----------------|
| 1000                       | 94.0                                   | 1000.023                 | 0.057                     | 2.0             |
| 1000                       | 104.0                                  | 1000.017                 | 0.057                     | 2.0             |

#### Remark:

- The uncertainty quoted is based on 95 % confidence level.
- Measured UUT output are mean of three measurements.

\*\*\*End of certificate\*\*\*



東業德勤測試顧問有限公司  
ETS-TESTCONSULT LTD.™

8/F Block B,  
Veristrong Industrial Centre,  
34-36 Au Pui Wan Street,  
Fo Tan, Hong Kong  
T: +852 2695 8318  
F: +852 2695 3944  
E: [et@ets-testconsult.com](mailto:et@ets-testconsult.com)  
W: [www.ets-testconsult.com](http://www.ets-testconsult.com)



Form QIAS/C01 Issue 1(1/7) (2021)

## Calibration Certificate

Certificate No. : CSA53630

Page : 1 of 3

### Information Provided by Customer

Customer : ETS - TESTCONSULT LIMITED  
Address : 8/F., Block B, Veristrong Industrial Centre, 34 - 36 Au Pui Wan Street, Fo Tan, Sha Tin, Hong Kong

### Information of Unit-under-test (UUT)

|                    | Sound Level Meter | Microphone | Pre-Amplifier | Sound Calibrator |
|--------------------|-------------------|------------|---------------|------------------|
| Manufacturer       | RION              | RION       | -             | Castle           |
| Type               | NL-52             | UC-59      | NH-25         | GA607            |
| Equipment I.D. no. | ET/EN/003/18      | -          | -             | ET/EN/002/07     |
| Serial No.         | 00264520          | 09668      | 64646         | 039641           |
| Adaptors used      | -                 |            |               |                  |
| Resolution         | 0.1 dB            |            |               |                  |

### Laboratory Information

Lab. Ref. No. : Q/CAL/25/4050/1  
Date of Calibration : 22-May-2025  
Date of Issue : 26-May-2025  
Procedure : CQS/001/A  
Date of Receipt : 15-May-2025  
Calibration Location : Calibration Laboratory

### Calibration Condition

Ambient Temperature : (20 ± 3) °C  
Stabilizing Time : 30 minutes  
Ambient Pressure : (1000 ± 50) hPa  
Relative Humidity : (50 ± 20) %  
Sampling : As received

### Reference equipment

- Multi-function sound calibrator, ET/2801/01
- Signal generator, ET/2503/01

### Calibration specification

- To perform the calibration of linearity and frequency response by multi-function sound calibrator.

### Calibration result

- The results are detailed on the subsequent pages.

### Remarks

- The calibration results apply to the particular unit-under-test only.
- The values given in this calibration certificate only to the values measured at the time of test & any uncertainties quoted will not include allowance for the equipment long term drift, verifications with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement.

Calibrated By : Tommy TAM  
(Technician)

Approved By: CHAN Chi Wai

The results shown in this certificate are traceable to the International System of Units (SI) or recognised measurement standards.  
This report shall not be reproduced unless with prior written approval from this laboratory.



東業德勤測試顧問有限公司  
ETS-TESTCONSULT LTD.™

B/F Block B,  
Yee Hong Industrial Centre,  
34-36 Au Pui Wan Street,  
Po Tan, Hong Kong  
T: +852 2695 8318  
F: +852 2695 3944  
E: ets@ets-testconsult.com  
W: www.ets-testconsult.com



Form QIAS/C01 Issue 1(2/7) [R021]

## Calibration Certificate

Certificate No. : CSA53630

Page : 2 of 3

### Calibration Result:

1 Reference Sound Pressure Level : (Unit in: dB)

| Range / Mode |          |           | Reference Level | REF Frequency (kHz) | UUT Reading | Deviation | Expanded Uncertainty | Coverage Factor |
|--------------|----------|-----------|-----------------|---------------------|-------------|-----------|----------------------|-----------------|
| A-Weighting  | Self-cal | Before    | 93.9            | 1                   | 93.7        | -0.2      | 0.13                 | 2.0             |
|              | Range    | 30 to 130 | 103.9           |                     | 103.7       | -0.2      | 0.13                 | 2.0             |
|              | Mode     | Fast      | 113.9           |                     | 113.7       | -0.2      | 0.13                 | 2.0             |
|              | Self-cal | After     | 93.9            | 1                   | 94.0        | 0.1       | 0.13                 | 2.0             |
|              | Range    | 30 to 130 | 103.9           |                     | 104.0       | 0.1       | 0.13                 | 2.0             |
|              | Mode     | Fast      | 113.9           |                     | 114.0       | 0.1       | 0.13                 | 2.0             |
|              | Self-cal | After     | 93.9            | 1                   | 94.0        | 0.1       | 0.13                 | 2.0             |
|              | Range    | 30 to 130 | 103.9           |                     | 104.0       | 0.1       | 0.13                 | 2.0             |
| C-Weighting  | Mode     | Slow      | 113.9           |                     | 114.0       | 0.1       | 0.13                 | 2.0             |
|              | Self-cal | After     | 93.9            | 1                   | 94.0        | 0.1       | 0.13                 | 2.0             |
|              | Range    | 30 to 130 | 103.9           |                     | 104.0       | 0.1       | 0.13                 | 2.0             |
|              | Mode     | Fast      | 113.9           |                     | 114.0       | 0.1       | 0.13                 | 2.0             |
|              | Self-cal | After     | 93.9            | 1                   | 94.0        | 0.1       | 0.13                 | 2.0             |
|              | Range    | 30 to 130 | 103.9           |                     | 104.0       | 0.1       | 0.13                 | 2.0             |
| Z-Weighting  | Mode     | Slow      | 113.9           |                     | 114.0       | 0.1       | 0.13                 | 2.0             |
|              | Self-cal | After     | 93.9            | 1                   | 94.0        | 0.1       | 0.13                 | 2.0             |
|              | Range    | 30 to 130 | 103.9           |                     | 104.0       | 0.1       | 0.13                 | 2.0             |
|              | Mode     | Fast      | 113.9           |                     | 114.0       | 0.1       | 0.13                 | 2.0             |
|              | Self-cal | After     | 93.9            | 1                   | 94.0        | 0.1       | 0.13                 | 2.0             |
|              | Range    | 30 to 130 | 103.9           |                     | 104.0       | 0.1       | 0.13                 | 2.0             |
|              | Mode     | Slow      | 113.9           |                     | 114.0       | 0.1       | 0.13                 | 2.0             |

### Remark:

- The uncertainty quoted is based on 95 % confidence level.
- UUT reading are mean of three measurements.
- Deviation = UUT Reading - Reference Level
- Customer's sound calibrator was used to adjust the "Self cal" reading of UUT.

\*\*\*





東業德勤測試顧問有限公司  
ETS-TESTCONSULT LTD.

8/F Block B,  
Verderberg Industrial Centre,  
34-36 Au Pui Wan Street,  
Fo Tan, Hong Kong  
T: +852 2606 8318  
F: +852 2695 3944  
E: ets@ets-testconsult.com  
W: www.ets-testconsult.com



Form QAS/CE/1 Issue 1(3/7) (04/02)

### Calibration Certificate

Certificate No. : CSA53630

Page : 3 of 3

#### Calibration Result:

##### Acoustic Sensitivity and Frequency Response:

#### 2 Frequency Response A-Weighting (Unit in: dB)

| Range     | Mode | Applied Level | Frequency (Hz) | Reference Level | UUT Reading | Deviation | IEC 61672-1:2002 class 1 Specification |
|-----------|------|---------------|----------------|-----------------|-------------|-----------|----------------------------------------|
| 30 to 130 | Fast | 93.9          | 31.5           | 94.4            | 94.4        | 0.0       | -30.4 +/- 2.0                          |
|           |      |               | 63             | 97.6            | 97.8        | 0.2       | -26.2 +/- 1.5                          |
|           |      |               | 125            | 97.7            | 97.9        | 0.2       | -16.1 +/- 1.5                          |
|           |      |               | 250            | 95.2            | 95.4        | 0.2       | -6.0 +/- 1.4                           |
|           |      |               | 500            | 90.5            | 90.8        | 0.2       | -3.2 +/- 1.4                           |
|           |      |               | 1000 (Ref.)    | 93.9            | 94.0        | 0.1       | 0 +/- 1.1                              |
|           |      |               | 2000           | 95.0            | 95.1        | 0.1       | +1.2 +/- 1.6                           |
|           |      |               | 4000           | 94.9            | 95.0        | 0.1       | +1.0 +/- 1.6                           |
|           |      |               | 8000           | 92.5            | 92.4        | -0.1      | -1.1 (+2.1; -3.1)                      |
|           |      |               | 12500          | 89.1            | 89.0        | -0.3      | -4.3 (+3.0; -6.0)                      |
|           |      |               | 16000          | 85.6            | 85.3        | -0.3      | -5.6 (+3.5; -17.0)                     |

#### 3 Frequency Response C-Weighting (Unit in: dB)

| Range     | Mode | Applied Level | Frequency (Hz) | Reference Level | UUT Reading | Deviation | IEC 61672-1:2002 class 1 Specification |
|-----------|------|---------------|----------------|-----------------|-------------|-----------|----------------------------------------|
| 30 to 130 | Fast | 93.9          | 31.5           | 93.8            | 93.7        | -0.1      | -3.0 +/- 2.0                           |
|           |      |               | 63             | 93.0            | 93.2        | 0.2       | -0.8 +/- 1.5                           |
|           |      |               | 125            | 93.6            | 93.9        | 0.3       | -0.2 +/- 1.5                           |
|           |      |               | 250            | 93.8            | 94.0        | 0.2       | 0.0 +/- 1.4                            |
|           |      |               | 500            | 93.8            | 94.0        | 0.2       | 0.0 +/- 1.4                            |
|           |      |               | 1000 (Ref.)    | 93.9            | 94.0        | 0.1       | 0 +/- 1.1                              |
|           |      |               | 2000           | 93.8            | 93.7        | -0.1      | -0.2 +/- 1.6                           |
|           |      |               | 4000           | 93.1            | 93.2        | 0.1       | -0.8 +/- 1.6                           |
|           |      |               | 8000           | 93.8            | 93.5        | -0.3      | -3.0 (+2.1; -3.1)                      |
|           |      |               | 12500          | 87.2            | 87.9        | -3.3      | -6.2 (+3.0; -6.0)                      |
|           |      |               | 16000          | 84.7            | 78.5        | -6.2      | -8.6 (+3.5; -17.0)                     |

#### 4 Frequency Response Z-Weighting (Unit in: dB)

| Range     | Mode | Applied Level | Frequency (Hz) | Reference Level | UUT Reading | Deviation | IEC 61672-1:2002 class 1 Specification |
|-----------|------|---------------|----------------|-----------------|-------------|-----------|----------------------------------------|
| 30 to 130 | Fast | 93.9          | 31.5           | 93.8            | 93.8        | 0.0       | 0.0 +/- 2.0                            |
|           |      |               | 63             | 93.8            | 94.0        | 0.2       | 0.0 +/- 1.5                            |
|           |      |               | 125            | 93.8            | 94.0        | 0.2       | 0.0 +/- 1.6                            |
|           |      |               | 250            | 93.8            | 94.0        | 0.2       | 0.0 +/- 1.4                            |
|           |      |               | 500            | 93.8            | 94.0        | 0.2       | 0.0 +/- 1.4                            |
|           |      |               | 1000 (Ref.)    | 93.9            | 94.0        | 0.1       | 0 +/- 1.1                              |
|           |      |               | 2000           | 93.8            | 93.9        | 0.1       | 0.0 +/- 1.6                            |
|           |      |               | 4000           | 93.9            | 94.0        | 0.1       | 0.0 +/- 1.6                            |
|           |      |               | 8000           | 93.8            | 93.4        | -0.3      | 0.0 (+2.1; -3.1)                       |
|           |      |               | 12500          | 93.4            | 90.4        | -3.0      | 0.0 (+3.0; -6.0)                       |
|           |      |               | 16000          | 93.2            | 88.2        | -5.0      | 0.0 (+3.5; -17.0)                      |

#### - Expanded uncertainty of sound pressure level calibration:

| Range (Hz) | (dB) | Range (Hz) | (dB) |
|------------|------|------------|------|
| 31.5       | 0.17 | 2000       | 0.13 |
| 63         | 0.15 | 4000       | 0.13 |
| 125        | 0.15 | 8000       | 0.15 |
| 250        | 0.13 | 12500      | 0.15 |
| 500        | 0.13 | 16000      | 0.15 |
| 1000       | 0.13 |            |      |

#### Remark:

- Manufacturer specification: IEC 61672 class 1
- Signal level at 1000 Hz is set as indication of reference sound pressure level
- The uncertainty quoted is based on 95 % confidence level with coverage factor k=2.0.
- UUT reading are mean of three measurements
- Deviation = UUT Reading - Reference Level

\*\*\*End of certificate\*\*\*



東業德勤測試顧問有限公司  
**ETS-TESTCONSULT LTD.**

8/F Block B,  
Veristrong Industrial Centre,  
34-36 Au Pui Wan Street,  
Fo Tan, Hong Kong  
T: +852 2695 8318  
F: +852 2695 3944  
E: [ets@ets-testconsult.com](mailto:ets@ets-testconsult.com)  
W: [www.ets-testconsult.com](http://www.ets-testconsult.com)



Form Q/ASQC/01 Issue 1(1/7) (04/21)

### Calibration Certificate

Certificate No. : CSA54904

Page : 1 of 3

#### Information Provided by Customer

Customer : ETS - Testconsult Limited  
Address : 8/F., Block B, Veristrong Industrial Centre, 34 - 36 Au Pui Wan Street, Fo Tan, Shatin, Hong Kong

#### Information of Unit-under-test (UUT)

|                    | Sound Level Meter | Microphone | Pre-Amplifier | Sound Calibrator |
|--------------------|-------------------|------------|---------------|------------------|
| Manufacturer       | RION              | RION       | RION          | N/A              |
| Type               | NL-52             | UC-59      | NH-25         | *                |
| Equipment I.D. no. | ET/EN/003/17      | -          | -             | -                |
| Serial No.         | 00264519          | 03558      | 64644         | -                |
| Adaptors used      | -                 |            |               |                  |
| Resolution         | 0.1 dB            |            |               |                  |

#### Laboratory Information

Lab. Ref. No. : Q/CAL/25/5473/6  
Date of Calibration : 15-Jul-2025  
Date of Issue : 16-Jul-2025  
Procedure : CQS/001/A  
Date of Receipt : 3-Jul-2025  
Calibration Location : Calibration Laboratory

#### Calibration Condition

Ambient Temperature : (20 ± 3) °C  
Stabilizing Time : 30 minutes  
Ambient Pressure : (1000 ± 50) hPa  
Relative Humidity : (50 ± 20) %  
Sampling : As received

#### Reference equipment

- Multi-function sound calibrator, ET/2801/01
- Signal generator, ET/2503/01

#### Calibration specification

- To perform the calibration of linearity and frequency response by multi-function sound calibrator.

#### Calibration result

- The results are detailed on the subsequent pages.

#### Remarks

- The calibration results apply to the particular unit-under-test only.
- The values given in this calibration certificate only to the values measured at the time of test & any uncertainties quoted will not include allowance for the equipment long term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement

Calibrated By : Tommy TAM  
(Technician)

Approved By: CHAN Chi Wai

The results shown in this certificate are traceable to the International System of Units (SI) or recognised measurement standards.  
This report shall not be reproduced unless with prior written approval from this laboratory.



東業德勤測試顧問有限公司  
ETS-TESTCONSULT LTD.™

8/F Block B,  
Weichong Industrial Centre,  
34-36 Au Pui Wan Street,  
Fo Tan, Hong Kong  
T: +852 2095 8318  
F: +852 2095 3944  
E: [etl@ets-testconsult.com](mailto:etl@ets-testconsult.com)  
W: [www.ets-testconsult.com](http://www.ets-testconsult.com)



Form QIAS/C/01 Issue 1(2/7) (06/21)

## Calibration Certificate

Certificate No. : CSA54904

Page : 2 of 3

### Calibration Result:

1 Reference Sound Pressure Level : (Unit in: dB)

| Range / Mode |          |           | Reference Level | REF Frequency (kHz) | UUT Reading | Deviation | Expanded Uncertainty | Coverage Factor |
|--------------|----------|-----------|-----------------|---------------------|-------------|-----------|----------------------|-----------------|
| A-Weighting  | Self-cal | Before    | 93.9            | 1                   | 98.1        | -5.8      | 0.13                 | 2.0             |
|              | Range    | 30 to 130 | 103.9           |                     | 98.1        | -5.8      | 0.13                 | 2.0             |
|              | Mode     | Fast      | 113.9           |                     | 106.1       | -5.6      | 0.13                 | 2.0             |
|              | Self-cal | After     | 93.9            | 1                   | 91.1        | -2.8      | 0.13                 | 2.0             |
|              | Range    | 30 to 130 | 103.9           |                     | 101.1       | -2.8      | 0.13                 | 2.0             |
|              | Mode     | Fast      | 113.9           |                     | 111.1       | -2.8      | 0.13                 | 2.0             |
|              | Self-cal | After     | 93.9            | 1                   | 91.0        | -2.9      | 0.13                 | 2.0             |
|              | Range    | 30 to 130 | 103.9           |                     | 101.1       | -2.8      | 0.13                 | 2.0             |
|              | Mode     | Slow      | 113.9           |                     | 111.1       | -2.8      | 0.13                 | 2.0             |
| C-Weighting  | Self-cal | After     | 93.9            | 1                   | 91.0        | -2.9      | 0.13                 | 2.0             |
|              | Range    | 30 to 130 | 103.9           |                     | 101.0       | -2.9      | 0.13                 | 2.0             |
|              | Mode     | Fast      | 113.9           |                     | 111.0       | -2.9      | 0.13                 | 2.0             |
|              | Self-cal | After     | 93.9            | 1                   | 91.0        | -2.9      | 0.13                 | 2.0             |
|              | Range    | 30 to 130 | 103.9           |                     | 101.0       | -2.9      | 0.13                 | 2.0             |
|              | Mode     | Slow      | 113.9           |                     | 111.0       | -2.9      | 0.13                 | 2.0             |
| Z-Weighting  | Self-cal | After     | 93.9            | 1                   | 91.0        | -2.9      | 0.13                 | 2.0             |
|              | Range    | 30 to 130 | 103.9           |                     | 101.0       | -2.9      | 0.13                 | 2.0             |
|              | Mode     | Fast      | 113.9           |                     | 111.0       | -2.9      | 0.13                 | 2.0             |
|              | Self-cal | After     | 93.9            | 1                   | 91.0        | -2.9      | 0.13                 | 2.0             |
|              | Range    | 30 to 130 | 103.9           |                     | 101.0       | -2.9      | 0.13                 | 2.0             |
|              | Mode     | Slow      | 113.9           |                     | 111.0       | -2.9      | 0.13                 | 2.0             |

### Remark:

- The uncertainty quoted is based on 95 % confidence level.
- UUT reading are mean of three measurements.
- Deviation = UUT Reading - Reference Level
- Laboratory reference multi-function sound calibrator was used to adjust the "Self cal" reading of UUT.

\*\*\*





東業德勤測試顧問有限公司  
ETS-TESTCONSULT LTD.™

8/F Block B,  
Verderberg Industrial Centre,  
34-36 Au Pui Wan Street,  
Fo Tan, Hong Kong  
T: +852 2695 8318  
F: +852 2695 3944  
E: ets@ets-testconsult.com  
W: www.ets-testconsult.com



Form QAS/C01 Issue 1(3/7) (09/21)

### Calibration Certificate

Certificate No. : CSA54904

Page : 3 of 3

#### Calibration Result:

##### Accuracy, Sensitivity and Frequency Response:

##### 2. Frequency Response A-Weighting (Unit in: dB)

| Range     | Mode | Applied Level | Frequency (Hz) | Reference Level | UUT Reading | Deviation |
|-----------|------|---------------|----------------|-----------------|-------------|-----------|
| 30 to 130 | Fast | 93.9          | 31.5           | 94.4            | 93.5        | -23.9     |
|           |      |               | 63             | 67.6            | 65.7        | -21.9     |
|           |      |               | 125            | 77.7            | 61.1        | -16.6     |
|           |      |               | 250            | 85.2            | 73.9        | -11.3     |
|           |      |               | 500            | 90.6            | 84.3        | -6.3      |
|           |      |               | 1000 (Ref.)    | 93.9            | 91.2        | -2.6      |
|           |      |               | 2000           | 95.0            | 93.8        | -1.2      |
|           |      |               | 4000           | 94.9            | 92.8        | -2.1      |
|           |      |               | 8000           | 92.5            | 87.4        | -5.1      |
|           |      |               | 12500          | 89.1            | 78.7        | -10.4     |
|           |      |               | 16000          | 86.6            | 71.5        | -15.1     |

##### 3. Frequency Response C-Weighting (Unit in: dB)

| Range     | Mode | Applied Level | Frequency (Hz) | Reference Level | UUT Reading | Deviation |
|-----------|------|---------------|----------------|-----------------|-------------|-----------|
| 30 to 130 | Fast | 93.9          | 31.5           | 90.8            | 63.1        | -27.7     |
|           |      |               | 63             | 93.0            | 70.8        | -22.2     |
|           |      |               | 125            | 93.6            | 77.1        | -16.5     |
|           |      |               | 250            | 93.6            | 82.6        | -11.2     |
|           |      |               | 500            | 93.8            | 87.4        | -6.4      |
|           |      |               | 1000 (Ref.)    | 93.9            | 91.1        | -2.7      |
|           |      |               | 2000           | 93.6            | 92.2        | -1.4      |
|           |      |               | 4000           | 93.1            | 90.8        | -2.3      |
|           |      |               | 8000           | 90.6            | 86.4        | -5.2      |
|           |      |               | 12500          | 87.2            | 79.9        | -10.3     |
|           |      |               | 16000          | 84.7            | 69.8        | -14.9     |

##### 4. Frequency Response Z-Weighting (Unit in: dB)

| Range     | Mode | Applied Level | Frequency (Hz) | Reference Level | UUT Reading | Deviation |
|-----------|------|---------------|----------------|-----------------|-------------|-----------|
| 30 to 130 | Fast | 93.9          | 31.5           | 93.8            | 66.0        | -27.8     |
|           |      |               | 63             | 93.8            | 71.7        | -22.0     |
|           |      |               | 125            | 93.8            | 77.3        | -16.5     |
|           |      |               | 250            | 93.8            | 82.0        | -11.2     |
|           |      |               | 500            | 93.8            | 87.5        | -6.3      |
|           |      |               | 1000 (Ref.)    | 93.9            | 91.0        | -2.8      |
|           |      |               | 2000           | 93.8            | 92.4        | -1.4      |
|           |      |               | 4000           | 93.9            | 91.6        | -2.3      |
|           |      |               | 8000           | 89.6            | 86.5        | -5.1      |
|           |      |               | 12500          | 83.4            | 83.3        | -10.1     |
|           |      |               | 16000          | 83.2            | 76.4        | -13.8     |

##### Expanded uncertainty of sound pressure level calibration:

| Range (Hz) | (dB) | Range (Hz) | (dB) |
|------------|------|------------|------|
| 31.5       | 0.62 | 2000       | 0.13 |
| 63         | 0.21 | 4000       | 0.13 |
| 125        | 0.15 | 8000       | 0.15 |
| 250        | 0.15 | 12500      | 0.15 |
| 500        | 0.13 | 16000      | 0.17 |
| 1000       | 0.13 |            |      |

#### Remark:

- Signal level at 1000 Hz is set as indication of reference sound pressure level.
- The uncertainty quoted is based on 95 % confidence level with coverage factor k=2.0.
- UUT reading are mean of three measurements.
- Deviation = UUT Reading - Reference Level

\*\*\*End of certificate\*\*\*

### Calibration record of Anemometer

|                    |                |              |                 |
|--------------------|----------------|--------------|-----------------|
| Equipment Ref. No. | : ET/EN/001/05 | Manufacturer | : AZ Instrument |
| Model No.          | : AZ 8908      | Serial No.   | : 1064869       |
| Date of Check      | : 25-Oct-2024  | Due Date     | : 24-Oct-2025   |

#### Method

- 1 Pipe with diameter about 10cm and length about 1m was used.
- 2 A fan with various speed control had set in on end of the pipe
- 3 Adjust the speed and direction of the fan to achieve the target wind speeds
- 4 Use the reference anemometer and the unit under test to check the wind speed at the other end of pipe
- 5 Record the indicated value of both anemometer
- 6 Apply the corrected value in the reference anemometer and calculate the corrected value of UUT.
- 7 The corrected value in the UUT should not over  $\pm 5\%$  of the Full scale

#### Reference Anemometer

|                    |              |                      |              |
|--------------------|--------------|----------------------|--------------|
| Equipment Ref. No. | : ET/1215/01 | Calibration Due Date | : 2-Sep-2026 |
|--------------------|--------------|----------------------|--------------|

#### Environmental Condition

|                     |        |                   |       |
|---------------------|--------|-------------------|-------|
| Ambient Temperature | : 26.0 | Relative Humidity | : 45% |
|---------------------|--------|-------------------|-------|

#### Results

| Applied Range<br>(m/s) | Reference Anemometer (m/s) |                 | Unit Under Test (m/s) |                 |
|------------------------|----------------------------|-----------------|-----------------------|-----------------|
|                        | Indicated Value            | Corrected Value | Indicated Value       | Corrected Value |
| 0                      | 0.00                       | 0.00            | 0.0                   | 0.0             |
| 2 - 3                  | 2.59                       | 2.65            | 2.4                   | +0.3            |
| 4 - 6                  | 5.68                       | 5.54            | 5.9                   | -0.4            |
| 9 - 11                 | 9.4                        | 9.8             | 10.1                  | -0.3            |
| 14 - 16                | 14.9                       | 15.4            | 15.2                  | +0.2            |
| 18 - 20                | 18.6                       | 18.8            | 19.3                  | -0.5            |

#### Acceptance Criteria

Correction value should  $< \pm 5\%$  FS

The Anemometer complies \* / ~~does not comply~~ \* with the specified requirements and is deemed acceptable \* / unacceptable \* for use.

\* Delete as appropriate

Checked by : 

Approved by : 



### Calibration record of Anemometer

|                    |                |              |                 |
|--------------------|----------------|--------------|-----------------|
| Equipment Ref. No. | : ET/EN/001/05 | Manufacturer | : AZ Instrument |
| Model No.          | : AZ 8908      | Serial No.   | : 1064869       |
| Date of Check      | : 24-Oct-2025  | Due Date     | : 23-Oct-2026   |

#### Method

- 1 Pipe with diameter about 10cm and length about 1m was used.
- 2 A fan with various speed control had set in on end of the pipe
- 3 Adjust the speed and direction of the fan to achieve the target wind speeds
- 4 Use the reference anemometer and the unit under test to check the wind speed in the other end of pipe.
- 5 Record the indicated value of both anemometer

#### Reference Anemometer

|                    |              |                      |              |
|--------------------|--------------|----------------------|--------------|
| Equipment Ref. No. | : ET/1215/01 | Calibration Due Date | : 2-Sep-2026 |
|--------------------|--------------|----------------------|--------------|

#### Environmental Condition

|                     |        |                   |       |
|---------------------|--------|-------------------|-------|
| Ambient Temperature | : 24.3 | Relative Humidity | : 51% |
|---------------------|--------|-------------------|-------|

#### Results

| Applied Range<br>(m/s) | Unit Under Test (m/s) |        |        |         | Error |
|------------------------|-----------------------|--------|--------|---------|-------|
|                        | Test 1                | Test 2 | Test 3 | Average |       |
| 0                      | 0.0                   | 0.0    | 0.0    | 0.0     | 0.0   |
| 2.5                    | 2.4                   | 2.3    | 2.4    | 2.4     | -0.1  |
| 5.0                    | 4.6                   | 4.6    | 4.5    | 4.6     | -0.4  |
| 10.0                   | 9.5                   | 9.6    | 9.7    | 9.6     | -0.4  |
| 15.0                   | 12.9                  | 12.7   | 12.9   | 12.8    | -2.2  |

Expanded Uncertainty = 0.3  
Coverage Factor = 2


Noted: Uncertainty quoted are based on 95% confidence level.

The Anemometer complies \* / ~~does not comply~~ \* with the specified requirements and is deemed acceptable \* / unacceptable \* for use.

\* Delete as appropriate


Checked by : Toby

Approved by : [Signature]

|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | J-1           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |

## APPENDIX J - NOISE IMPACT MONITORING RESULT

---


|                                                                                   |                                                                          |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  | Page | J-2           |
|                                                                                   |                                                                          |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  | Rev. | 01            |
|                                                                                   |                                                                          |  | Date | Nov 25        |

## Monthly Environmental Monitoring & Audit Report for Port Shelter Phase 3, Po Toi O Sewerage Treatment Plant

### 2025 October Noise Monitoring Data

Monitoring Location: NMS1N

| Date          | Noise Monitoring (30min)                        |            |           |           |           |
|---------------|-------------------------------------------------|------------|-----------|-----------|-----------|
|               | Weather                                         | Start Time | Leq dB(A) | L10 dB(A) | L90 dB(A) |
| 6- Oct -25    | Sunny                                           | 11:30      | 65.7      | 69.0      | 64.3      |
| 15- Oct -25   | Fine                                            | 10:00      | 66.6      | 69.1      | 63.2      |
| 21- Oct -25   | Cloudy                                          | 9:00       | 67.5      | 69.2      | 64.4      |
| 27- Oct -25   | Cloudy                                          | 9:00       | 66.3      | 68.1      | 63.5      |
| Average       | 66.6                                            |            |           |           |           |
| Action Level: | When one valid documented complaint is received |            |           |           |           |
| Limit Level:  | 75.0 dB(A)                                      |            |           |           |           |


|                                                                                   |                                                                          |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  | Page | J-3           |
|                                                                                   |                                                                          |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  | Rev. | 01            |
|                                                                                   |                                                                          |  | Date | Nov 25        |

## Monthly Environmental Monitoring & Audit Report for Port Shelter Phase 3, Po Toi O Sewerage Treatment Plant

### 2025 October Noise Monitoring Data

Monitoring Location: NMS2N1

| Date          | Noise Monitoring (30min)                        |            |           |           |           |
|---------------|-------------------------------------------------|------------|-----------|-----------|-----------|
|               | Weather                                         | Start Time | Leq dB(A) | L10 dB(A) | L90 dB(A) |
| 6- Oct -25    | Sunny                                           | 10:23      | 56.8      | 59.3      | 54.3      |
| 15- Oct -25   | Fine                                            | 10:35      | 60.7      | 62.6      | 57.6      |
| 21- Oct -25   | Cloudy                                          | 9:35       | 60.4      | 61.8      | 58.2      |
| 27- Oct -25   | Cloudy                                          | 13:30      | 59.9      | 61.3      | 57.1      |
| Average       | 59.7                                            |            |           |           |           |
| Action Level: | When one valid documented complaint is received |            |           |           |           |
| Limit Level:  | 75.0 dB(A)                                      |            |           |           |           |


|                                                                                   |                                                                          |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  | Page | J-4           |
|                                                                                   |                                                                          |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  | Rev. | 01            |
|                                                                                   |                                                                          |  | Date | Nov 25        |

## Monthly Environmental Monitoring & Audit Report for Port Shelter Phase 3, Po Toi O Sewerage Treatment Plant

### 2025 October Noise Monitoring Data

Monitoring Location: NMS3N

| Date          | Noise Monitoring (30min)                        |            |           |           |           |
|---------------|-------------------------------------------------|------------|-----------|-----------|-----------|
|               | Weather                                         | Start Time | Leq dB(A) | L10 dB(A) | L90 dB(A) |
| 6- Oct -25    | Sunny                                           | 9:48       | 57.6      | 62.1      | 54.1      |
| 15- Oct -25   | Fine                                            | 11:10      | 59.1      | 61.2      | 55.8      |
| 21- Oct -25   | Cloudy                                          | 10:10      | 59.4      | 60.9      | 56.5      |
| 27- Oct -25   | Cloudy                                          | 14:05      | 58.1      | 60.0      | 54.9      |
| Average       | 58.6                                            |            |           |           |           |
| Action Level: | When one valid documented complaint is received |            |           |           |           |
| Limit Level:  | 75.0 dB(A)                                      |            |           |           |           |


|                                                                                   |                                                                          |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O | Page | J-5           |
|                                                                                   |                                                                          | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      | Rev. | 01            |
|                                                                                   |                                                                          | Date | Nov 25        |

## Monthly Environmental Monitoring & Audit Report for Port Shelter Phase 3, Po Toi O Sewerage Treatment Plant


### 2025 October Noise Monitoring Data

Monitoring Location: NMS4N


| Date          | Noise Monitoring (30min)                        |            |           |           |           |
|---------------|-------------------------------------------------|------------|-----------|-----------|-----------|
|               | Weather                                         | Start Time | Leq dB(A) | L10 dB(A) | L90 dB(A) |
| 6- Oct -25    | Sunny                                           | 10:56      | 46.6      | 48.4      | 44.1      |
| 15- Oct -25   | Fine                                            | 13:20      | 49.6      | 52.0      | 46.9      |
| 21- Oct -25   | Cloudy                                          | 11:00      | 51.1      | 53.2      | 48.1      |
| 27- Oct -25   | Cloudy                                          | 14:40      | 48.4      | 50.2      | 44.8      |
| Average       | 49.2                                            |            |           |           |           |
| Action Level: | When one valid documented complaint is received |            |           |           |           |
| Limit Level:  | 75.0 dB(A)                                      |            |           |           |           |

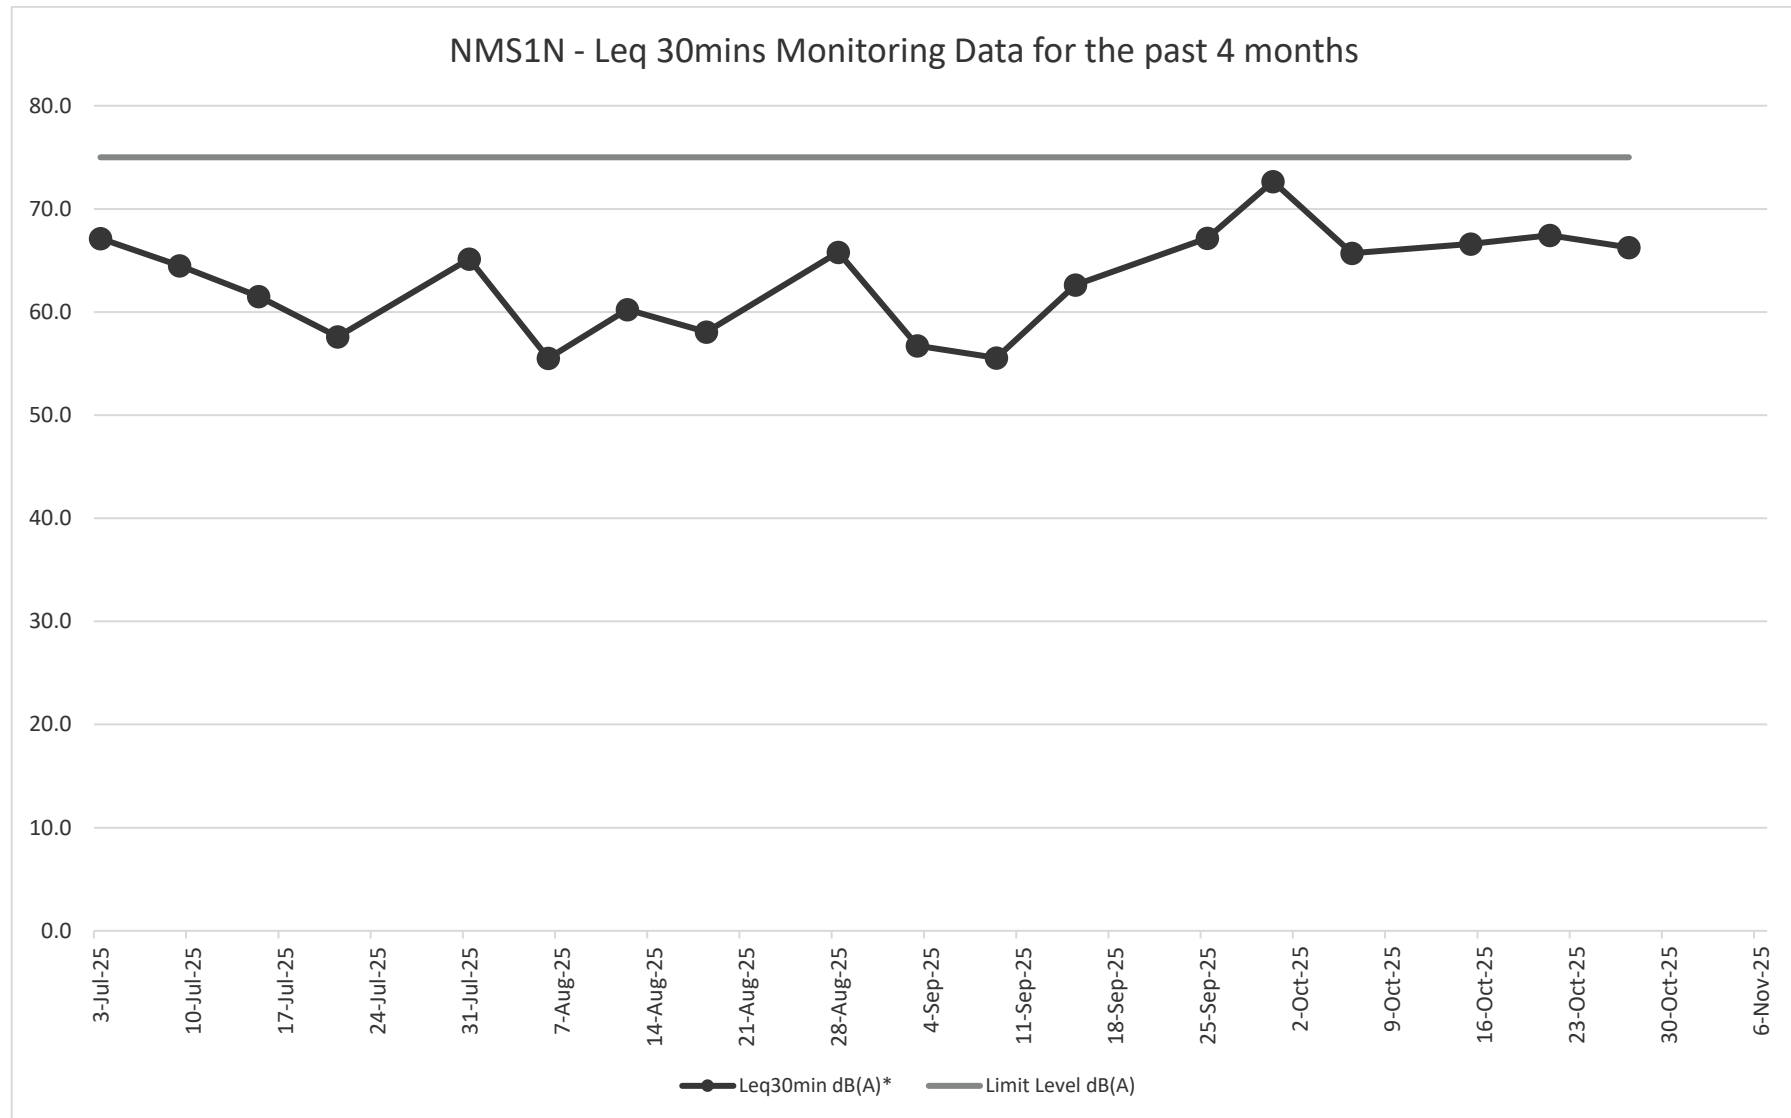



NMS2N1 - Leq 30mins Monitoring Data for the past 4 months

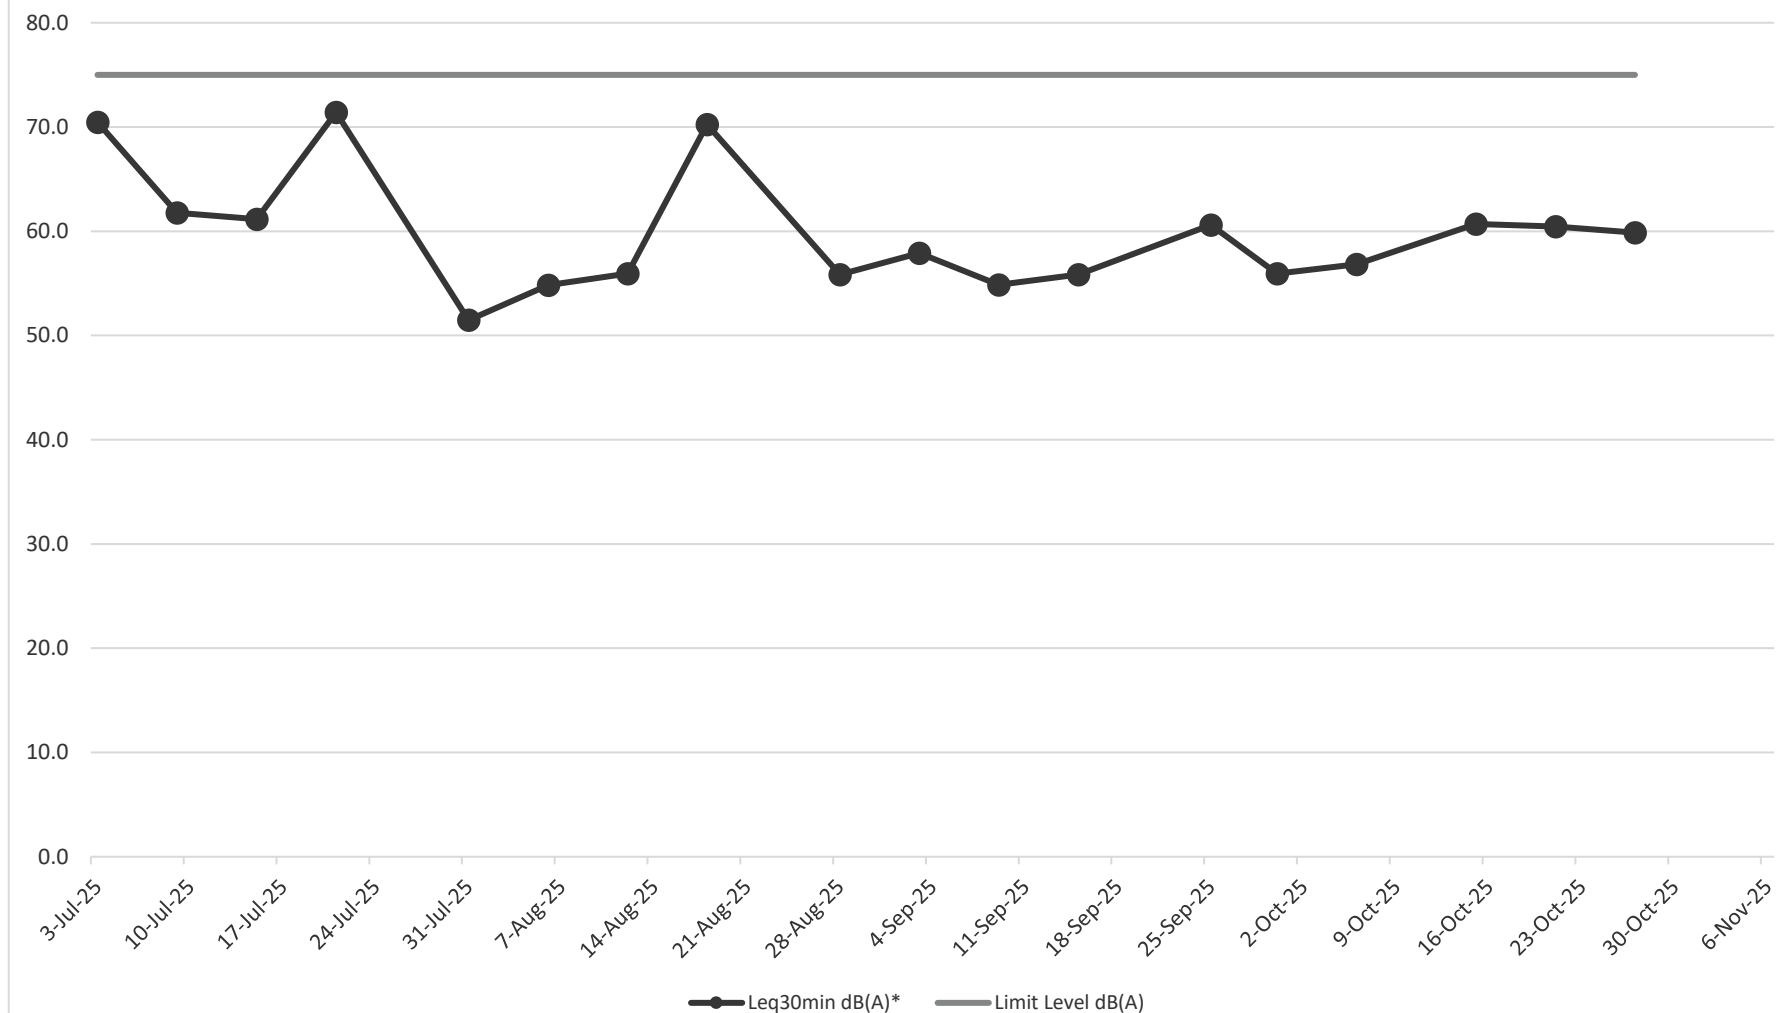



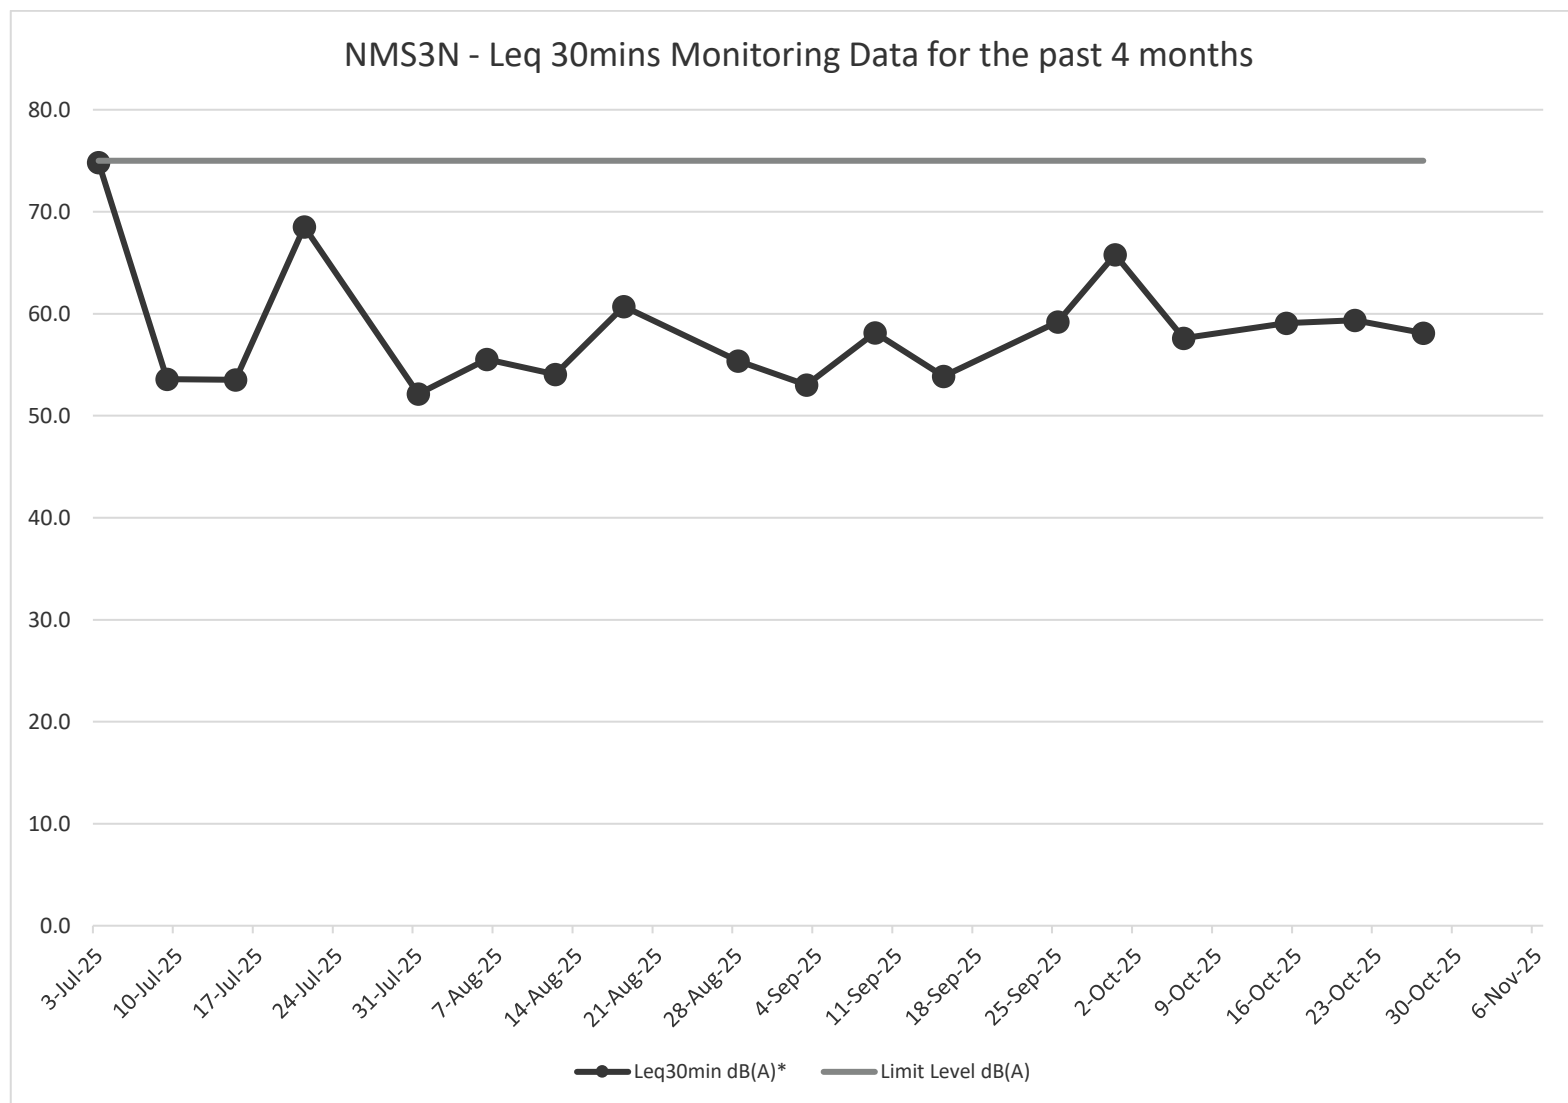

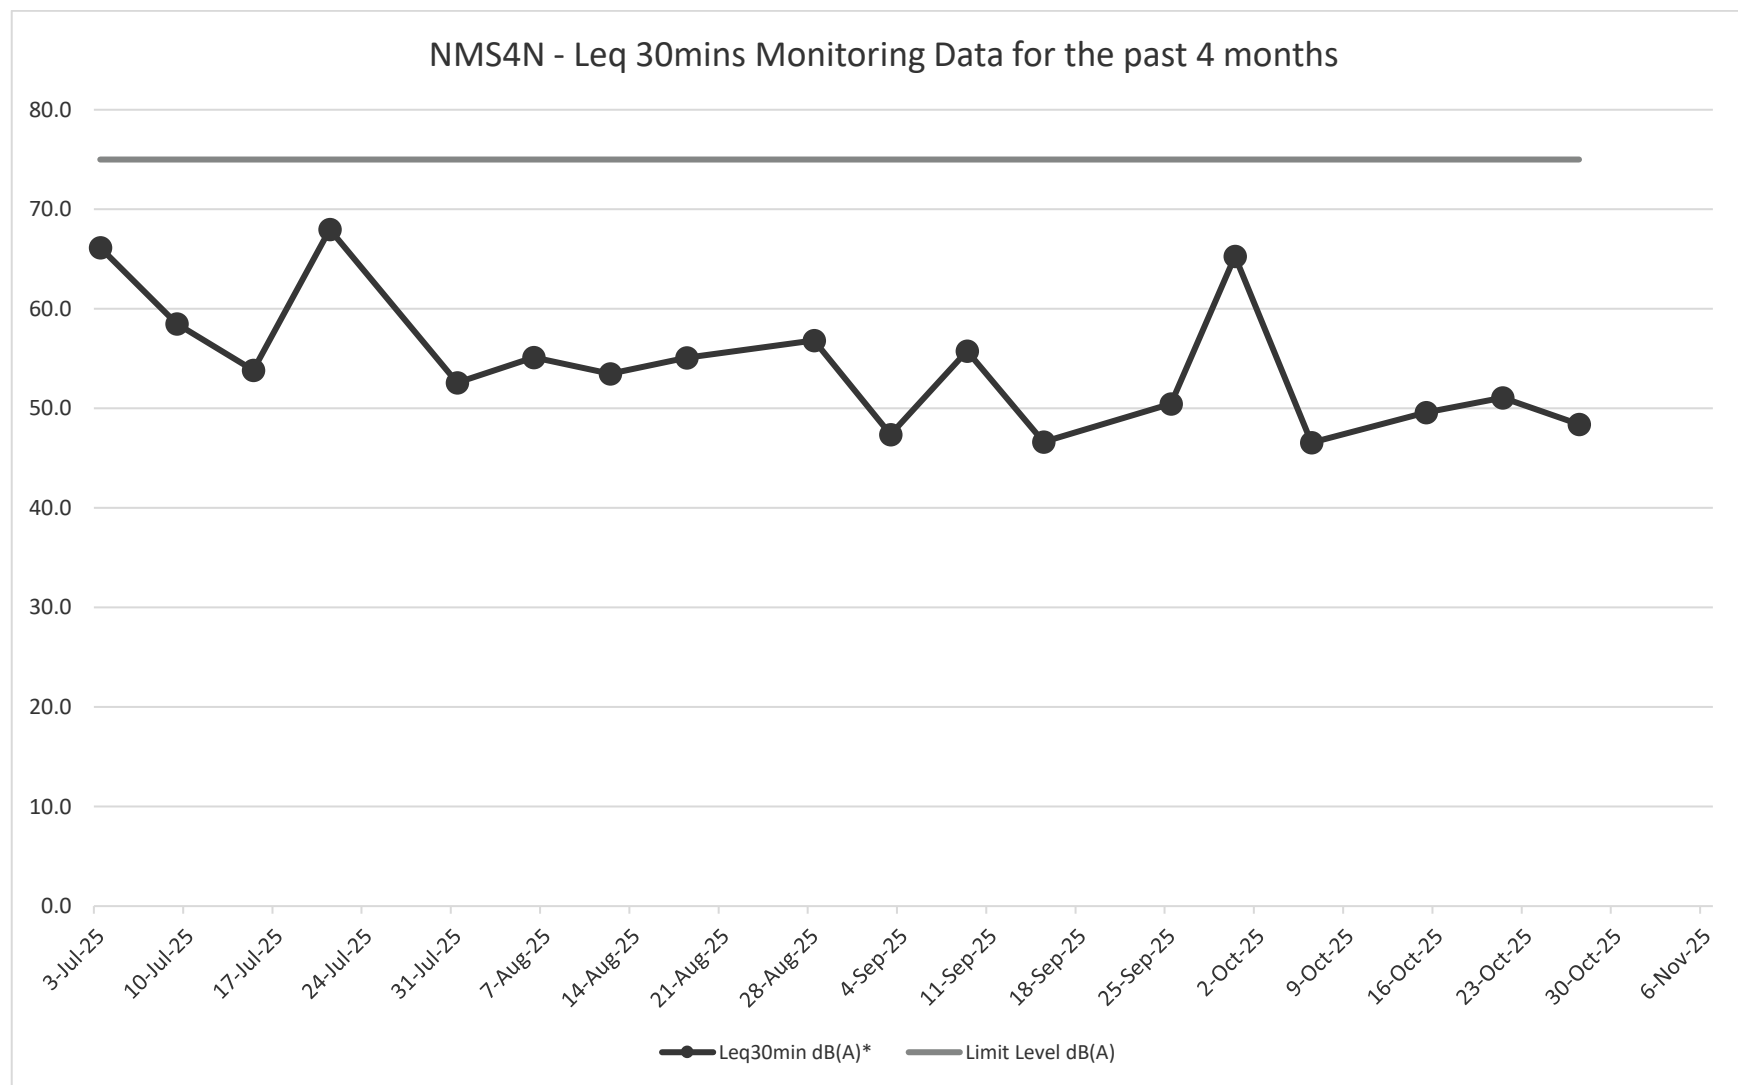


|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | K-1           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |


## APPENDIX K – WATER QUALITY MONITORING SCHEDULES

---

|                                                                                   |                                                                          |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O | Page | K-2           |
|                                                                                   |                                                                          | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      | Rev. | 01            |
|                                                                                   |                                                                          | Date | Nov 25        |


## October 2025

| Sunday | Monday | Tuesday                                                                                                                                                                    | Wednesday               | Thursday | Friday                                                                                                                                                             | Saturday |
|--------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
|        |        |                                                                                                                                                                            | 1 National Day          | 2        | 3                                                                                                                                                                  | 4        |
| 5      | 6      | 7 The day following the Chinese Mid-Autumn                                                                                                                                 | 8                       | 9        | 10<br>Water Quality Monitoring<br>Ebb: 12:15 - 15:45<br>Flood: 06:15 - 09:45                                                                                       | 11       |
| 12     | 13     | 14                                                                                                                                                                         | 15                      | 16       | 17                                                                                                                                                                 | 18       |
| 19     | 20     | 21                                                                                                                                                                         | 22                      | 23       | 24<br>Water Quality Monitoring<br>Ebb: 11:45 - 15:15<br>Flood: 06:15 - 09:45                                                                                       | 25       |
| 26     | 27     | 28                                                                                                                                                                         | 29 Chung Yeung Festival | 30       | 31                                                                                                                                                                 |          |
|        |        | Notes                                                                                                                                                                      |                         |          | Calendar Templates by Vertex42.com<br><a href="https://www.vertex42.com/calendars/">https://www.vertex42.com/calendars/</a><br>© 2022 Vertex42 LLC. Free to print. |          |
|        |        | 1. Water sampling will be conducted +/- 1.75 hour of the predicted tides time.<br>2. Predicted tides time were reference from Hong Kong Observatory (Tai Miu Wan Station). |                         |          | <a href="#">2025 Calendars</a> <a href="#">2026 Calendars</a>                                                                                                      |          |

|                                                                                   |                                                                          |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O | Page | K-3           |
|                                                                                   |                                                                          | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      | Rev. | 01            |
|                                                                                   |                                                                          | Date | Nov 25        |


## November 2025

| Sunday | Monday | Tuesday                                                                                                                                                                             | Wednesday | Thursday | Friday                                                                                                                                                                                                                              | Saturday |
|--------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
|        |        |                                                                                                                                                                                     |           |          |                                                                                                                                                                                                                                     | 1        |
| 2      | 3      | 4                                                                                                                                                                                   | 5         | 6        | 7<br>Water<br>Quality Monitoring<br>Ebb: 11:15 - 14:45<br>Flood: 06:15 - 09:45                                                                                                                                                      | 8        |
| 9      | 10     | 11                                                                                                                                                                                  | 12        | 13       | 14                                                                                                                                                                                                                                  | 15       |
| 16     | 17     | 18                                                                                                                                                                                  | 19        | 20       | 21<br>Water<br>Quality Monitoring<br>Ebb: 10:45 - 14:15<br>Flood: 06:15 - 09:45                                                                                                                                                     | 22       |
| 23     | 24     | 25                                                                                                                                                                                  | 26        | 27       | 28                                                                                                                                                                                                                                  | 29       |
| 30     |        | Notes<br>1. Water sampling will be conducted +/- 1.75 hour of the predicted tides time.<br>2. Predicted tides time were reference from Hong Kong Observatory (Tai Miu Wan Station). |           |          | Calendar Templates by Vertex42.com<br><a href="https://www.vertex42.com/calendars/">https://www.vertex42.com/calendars/</a><br>© 2022 Vertex42 LLC. Free to print.<br><a href="#">2025 Calendars</a> <a href="#">2026 Calendars</a> |          |

|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | L-1           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |

## APPENDIX L – MONTHLY SUMMARY OF WASTE FLOW


---

|                                                                                   |                                                                          |  |  |  |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|--|--|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  |  |  |  | Page | L-2           |
|                                                                                   |                                                                          |  |  |  |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  |  |  |  | Rev. | 01            |
|                                                                                   |                                                                          |  |  |  |  | Date | Nov 25        |

**Monthly Summary Waste Flow Table for 2025 Year**

| Month     | Actual Quantities of Inert C&D Materials Generated Monthly |                                     |                          |                          |                          |                          | Actual Quantities of C&D Wastes Generated Monthly |                             |                       |                |                            |
|-----------|------------------------------------------------------------|-------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|---------------------------------------------------|-----------------------------|-----------------------|----------------|----------------------------|
|           | Total Quantity Generated                                   | Hard Rock and Large Broken Concrete | Reused in the Contract   | Reused in other Projects | Disposal as Public Fill  | Imported Fill            | Metals                                            | Paper / Cardboard Packaging | Plastics (see note 3) | Chemical Waste | Other, e.g. general refuse |
|           | (in '000m <sup>3</sup> )                                   | (in '000m <sup>3</sup> )            | (in '000m <sup>3</sup> ) | (in '000m <sup>3</sup> ) | (in '000m <sup>3</sup> ) | (in '000m <sup>3</sup> ) | [in '000kg]                                       | [in '000kg]                 | [in '000kg]           | [in '000kg]    | [in Tonne]                 |
| Jan       | 0.003                                                      | 0.000                               | 0.000                    | 0.000                    | 0.003                    | 0.000                    | 0.000                                             | 0.000                       | 0.000                 | 0.000          | 0.000                      |
| Feb       | 0.000                                                      | 0.000                               | 0.000                    | 0.000                    | 0.000                    | 0.000                    | 0.000                                             | 0.000                       | 0.000                 | 0.000          | 0.000                      |
| Mar       | 0.000                                                      | 0.000                               | 0.000                    | 0.000                    | 0.000                    | 0.000                    | 0.000                                             | 0.000                       | 0.000                 | 0.000          | 0.000                      |
| Apr       | 0.000                                                      | 0.000                               | 0.000                    | 0.000                    | 0.000                    | 0.000                    | 0.000                                             | 0.000                       | 0.000                 | 0.000          | 0.000                      |
| May       | 0.000                                                      | 0.000                               | 0.000                    | 0.000                    | 0.000                    | 0.000                    | 0.000                                             | 0.000                       | 0.000                 | 0.000          | 0.000                      |
| Jun       | 0.085                                                      | 0.000                               | 0.000                    | 0.000                    | 0.085                    | 0.000                    | 0.000                                             | 0.000                       | 0.000                 | 0.000          | 3.67                       |
| Sub-Total | 0.088                                                      | 0.000                               | 0.000                    | 0.000                    | 0.088                    | 0.000                    | 0.000                                             | 0.000                       | 0.000                 | 0.000          | 3.67                       |
| Jul       | 0.000                                                      | 0.000                               | 0.000                    | 0.000                    | 0.000                    | 0.000                    | 0.000                                             | 0.000                       | 0.000                 | 0.000          | 8.34                       |
| Aug       | 0.000                                                      | 0.000                               | 0.000                    | 0.000                    | 0.000                    | 0.000                    | 0.000                                             | 0.000                       | 0.000                 | 0.000          | 11.76                      |
| Sep       | 0.003                                                      | 0.000                               | 0.000                    | 0.000                    | 0.003                    | 0.000                    | 0.000                                             | 0.000                       | 0.000                 | 0.000          | 10.37                      |
| Oct       | 0.000                                                      | 0.000                               | 0.000                    | 0.000                    | 0.000                    | 0.000                    | 0.000                                             | 0.000                       | 0.000                 | 0.000          | 4.13                       |
| Nov       |                                                            |                                     |                          |                          |                          |                          |                                                   |                             |                       |                |                            |
| Dec       |                                                            |                                     |                          |                          |                          |                          |                                                   |                             |                       |                |                            |
| Total     | 0.091                                                      | 0.000                               | 0.000                    | 0.000                    | 0.091                    | 0.000                    | 0.000                                             | 0.000                       | 0.000                 | 0.000          | 35.27                      |


- Note:**
- 1) The performance targets are given in the Environmental Management Plan.
  - (2) The waste flow table shall also include C&D materials to be imported for use at the Site.
  - (3) Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging material.

|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | M-1           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |


## APPENDIX M - IMPLEMENTATION SCHEDULE OF RECOMMENDED MITIGATION MEASURES

---




|                                                                                   |                                                                          |  |  |  |  |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|--|--|--|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  |  |  |  |  | Page | M-2           |
|                                                                                   |                                                                          |  |  |  |  |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  |  |  |  |  | Rev. | 01            |
|                                                                                   |                                                                          |  |  |  |  |  | Date | Nov 25        |


| EIA Ref.                  | EM & A Ref. | Recommended Mitigation Measures *                                                                                                                                                            | Objectives of the Recommended Measure & Main Concerns to address | Implementation Agent | Location of the measure | Duration of the measure       | Implementation stages | Relevant Legislation & Guidelines |
|---------------------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|----------------------|-------------------------|-------------------------------|-----------------------|-----------------------------------|
| Air Quality impact        |             |                                                                                                                                                                                              |                                                                  |                      |                         |                               |                       |                                   |
| Project Specific Measures |             |                                                                                                                                                                                              |                                                                  |                      |                         |                               |                       |                                   |
| 3.8                       | A1          | Deodourizer should have at least 99.5% hydrogen sulfide removal efficiency.                                                                                                                  | To minimize odour nuisance to sensitive receivers                | DSD                  | Sewage Treatment Plant  | Throughout operational phase  | Operational phase     | EIAO-TM                           |
| 3.8                       | A2          | Odourous materials (sludge, screenings and grits, worn filter) should be stored and removed in sealed tankers and containers.                                                                | To minimize odour nuisance to sensitive receivers                | DSD                  | Sewage Treatment Plant  | Throughout operational phase  | Operational phase     | EIAO-TM                           |
| 3.8                       | A3          | Sludge should be transferred to sludge tanker by coupling method.                                                                                                                            | To minimize odour nuisance to sensitive receivers                | DSD                  | Sewage Treatment Plant  | Throughout operational phase  | Operational phase     | EIAO-TM                           |
| 3.8                       | A4          | During release of pressure from the tanker, the odourous gas should be discharged into the sludge storage room for extraction to deodourization unit.                                        | To minimize odour nuisance to sensitive receivers                | DSD                  | Sewage Treatment Plant  | Throughout operational phase  | Operational phase     | EIAO-TM                           |
| 3.8                       | A5          | Regular inspection should be conducted to check for leakage of odourous gas.                                                                                                                 | To minimize odour nuisance to sensitive receivers                | DSD                  | Sewage Treatment Plant  | Throughout operational phase  | Operational phase     | EIAO-TM                           |
| 3.8                       | A6          | Maintain the removal efficiency of screenings and grits by flushing the screens and grit sump regularly to prevent buildup of solids                                                         | To maintain the removal efficiency of screenings and grits       | DSD                  | Sewage Treatment Plant  | Throughout operational phase  | Operational phase     | EIAO-TM                           |
| 3.8                       | A7          | Maintain the efficiency of MBR membrane by removing organic and inorganic debris regularly                                                                                                   | To maintain the efficiency of MBR membrane                       | DSD                  | Sewage Treatment Plant  | Throughout operational phase  | Operational phase     | EIAO-TM                           |
| 3.8                       | A8          | Replace worn filter to maintain the odour removal efficiency at 99.5%                                                                                                                        | To minimize odour nuisance to sensitive receivers                | DSD                  | Sewage Treatment Plant  | Throughout operational phase  | Operational phase     | EIAO-TM                           |
| 3.8                       | A9          | Clean all the tanks with water regularly                                                                                                                                                     | To minimize odour nuisance to sensitive receivers                | DSD                  | Sewage Treatment Plant  | Throughout operational phase  | Operational phase     | EIAO-TM                           |
| General/Standard Measures |             |                                                                                                                                                                                              |                                                                  |                      |                         |                               |                       |                                   |
| 3.8                       | A10         | Good housekeeping to minimize dust generation, e.g. by properly handling and storing dusty materials                                                                                         | To minimize dust generation                                      | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction Phase    | EIAO-TM, APCO                     |
| 3.8                       | A11         | Adopt dust control measures, such as dust suppression using water spray on exposed soil (at least 4 times per day), in areas with dusty construction activities and during material handling | To minimize dust generation due to erosion                       | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | EIAO-TM, APCO                     |

|                                                                                   |                                                                          |  |  |  |  |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|--|--|--|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  |  |  |  |  | Page | M-3           |
|                                                                                   |                                                                          |  |  |  |  |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  |  |  |  |  | Rev. | 01            |
|                                                                                   |                                                                          |  |  |  |  |  | Date | Nov 25        |


| EIA Ref. | EM & A Ref. | Recommended Mitigation Measures *                                                                                                                  | Objectives of the Recommended Measure & Main Concerns to address             | Implementation Agent | Location of the measure | Duration of the measure       | Implementation stages | Relevant Legislation & Guidelines |
|----------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|----------------------|-------------------------|-------------------------------|-----------------------|-----------------------------------|
| 3.8      | A12         | Store cement bags in shelter with 3 sides and the top covered by impervious materials if the stack exceeds 20 bags                                 | To prevent leakage of cement                                                 | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | EIAO-TM, APCO                     |
| 3.8      | A13         | Maintain a reasonable height when dropping excavated materials to limit dust generation                                                            | To minimize dust generation during movement of excavated materials           | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | EIAO-TM, APCO                     |
| 3.8      | A14         | Limit vehicle speed within construction site and in Po Toi O to 10km/hr and confine vehicle movement in haul road                                  | To minimize dust generation due to traffic movement                          | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | EIAO-TM, APCO                     |
| 3.8      | A15         | Minimize exposed earth after completion of work in a certain area by hydroseeding, vegetating, soil compacting or covering with bitumen            | To minimize dust generation due to erosion                                   | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | EIAO-TM, APCO                     |
| 3.8      | A16         | Provide wheel washing at construction site exit to clean the vehicle body and wheel                                                                | To prevent dust from being brought offsite                                   | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | EIAO-TM, APCO                     |
| 3.8      | A17         | Cover materials on trucks before leaving the construction site to prevent debris from dropping during traffic movement or being blown away by wind | To prevent falling of debris during traffic movement and by wind             | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | EIAO-TM, APCO                     |
| 3.8      | A18         | Regular maintenance of plant equipment to prevent black smoke emission                                                                             | To minimize black smoke emission                                             | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | EIAO-TM, APCO                     |
| 3.8      | A19         | Throttle down or switch off unused machines or machine in intermittent use                                                                         | To minimize unnecessary emission                                             | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | EIAO-TM, APCO                     |
| 3.8      | A20         | Minimize excavation area as far as possible                                                                                                        | To minimize dust emission and potential release of odour from exposed ground | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | EIAO-TM, APCO                     |

|                                                                                   |                                                                          |  |  |  |  |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|--|--|--|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  |  |  |  |  | Page | M-4           |
|                                                                                   |                                                                          |  |  |  |  |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  |  |  |  |  | Rev. | 01            |
|                                                                                   |                                                                          |  |  |  |  |  | Date | Nov 25        |


| EIA Ref. | EM & A Ref. | Recommended Mitigation Measures *                                                                                                                                                                              | Objectives of the Recommended Measure & Main Concerns to address            | Implementation Agent | Location of the measure | Duration of the measure                    | Implementation stages | Relevant Legislation & Guidelines |
|----------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|----------------------|-------------------------|--------------------------------------------|-----------------------|-----------------------------------|
| 3.8      | A21         | Store odourous excavated materials in covered containers and remove off-site as soon as possible within 24 hours                                                                                               | To minimize odour nuisance to sensitive receivers                           | DSD's Contractor     | Whole construction site | Throughout construction phase              | Construction phase    | EIAO-TM, APCO                     |
| 3.8      | A22         | Cover open stockpiles of construction materials (e.g. aggregates, sand and fill materials) with impermeable materials such as tarpaulin during rainstorms                                                      | To prevent soil erosion under rainstorm                                     | DSD's Contractor     | Whole construction site | Throughout construction phase              | Construction phase    | EIAO-TM, APCO                     |
| 3.8      | A23         | Hoarding of not less than 2.4 m high shall be erected from ground level to surround the construction site for sewage treatment plant along Po Toi O Chuen Road except for a construction site entrance or exit | To minimize dust emission                                                   | DSD's Contractor     | Whole construction site | Throughout construction phase              | Construction phase    | EIAO-TM, APCO                     |
| 3.8      | A24         | Carry out air quality monitoring throughout the construction period                                                                                                                                            | To monitor construction dust level                                          | DSD's Contractor     | At representative ASRs  | Prior to and throughout construction phase | Construction phase    | EIAO-TM                           |
| 3.8      | A25         | Carry out regular site inspection to audit the implementation of mitigation measures                                                                                                                           | To check the implementation status and effectiveness of mitigation measures | DSD's Contractor     | Whole construction site | Throughout construction phase              | Construction phase    | EIAO-TM, APCO                     |

|                                                                                   |                                                                          |  |  |  |  |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|--|--|--|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  |  |  |  |  | Page | M-5           |
|                                                                                   |                                                                          |  |  |  |  |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  |  |  |  |  | Rev. | 01            |
|                                                                                   |                                                                          |  |  |  |  |  | Date | Nov 25        |


| EIA Ref.                  | EM & A Ref. | Recommended Mitigation Measures *                                                                                                                                                                                                                                   | Objectives of the Recommended Measure & Main Concerns to address | Implementation Agent | Location of the measure | Duration of the measure       | Implementation stages | Relevant Legislation & Guidelines |
|---------------------------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|----------------------|-------------------------|-------------------------------|-----------------------|-----------------------------------|
| Noise Impact              |             |                                                                                                                                                                                                                                                                     |                                                                  |                      |                         |                               |                       |                                   |
| Project Specific Measures |             |                                                                                                                                                                                                                                                                     |                                                                  |                      |                         |                               |                       |                                   |
| 4.7                       | N1          | Use hand-held plant equipment or manual equipment within village area                                                                                                                                                                                               | To minimize construction noise level                             | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | NCO, EIAO-TM                      |
| 4.7                       | N2          | For HDD, enclose the stationary plant equipment on three sides with cover. Only the side facing the sea shall be opened for heat exhaustion.                                                                                                                        | To lower noise transmission                                      | DSD's Contractor     | HDD work site           | Throughout construction phase | Construction Phase    | NCO, EIAO-TM                      |
| 4.7                       | N3          | Generator should be placed at a fixed location at least 5-6m away from the NSRs and screened by noise barrier whenever excavation work has to be carried out at their front doors                                                                                   | To lower noise transmission                                      | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction Phase    | NCO, EIAO-TM                      |
| 4.7                       | N4          | Avoid carrying out noisy activities at the same time. The work front of village sewer installation near NSRs PTO_N1 and PTO_N3 shall not be conducted concurrently with installation of Po Toi O Chuen Road sewer and horizontal directional drilling respectively. | To minimize noise production                                     | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction Phase    | NCO, EIAO-TM                      |
| 4.7                       | N5          | Vibratory poker shall only be operated 4m away from NSR and with noise barrier properly erected. Surfacing work within 4m from NSR shall be carried out by manual method                                                                                            | To minimize noise production                                     | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | NCO, EIAO-TM                      |
| Generic/Standard Measures |             |                                                                                                                                                                                                                                                                     |                                                                  |                      |                         |                               |                       |                                   |
| 4.7                       | N6          | Schedule noisy activities to minimise exposure of nearby NSRs to high levels of construction noise                                                                                                                                                                  | To minimize construction noise level                             | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction Phase    | NCO, EIAO-TM                      |
| 4.7                       | N7          | Use Quality Powered Mechanical Equipment (QPME) which produces lower noise level                                                                                                                                                                                    | To minimize construction noise level                             | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction Phase    | NCO, EIAO-TM                      |
| 4.7                       | N8          | Erect 3m high mobile barriers with skid footing and a small cantilevered upper portion within a few metres of stationary plants and within about 5m of more mobile plant.                                                                                           | To lower noise transmission                                      | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | NCO, EIAO-TM                      |

|                                                                                   |                                                                          |  |  |  |  |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|--|--|--|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  |  |  |  |  | Page | M-6           |
|                                                                                   |                                                                          |  |  |  |  |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  |  |  |  |  | Rev. | 01            |
|                                                                                   |                                                                          |  |  |  |  |  | Date | Nov 25        |


| EIA Ref. | EM & A Ref. | Recommended Mitigation Measures *                                                                                                                                                                                                                             | Objectives of the Recommended Measure & Main Concerns to address | Implementation Agent | Location of the measure | Duration of the measure                    | Implementation stages | Relevant Legislation & Guidelines |
|----------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|----------------------|-------------------------|--------------------------------------------|-----------------------|-----------------------------------|
| 4.7      | N9          | Hand-held breaker shall be fitted with mufflers. A movable enclosure made up of plywood is proposed to surround both worker and breaker during breaking process. The internal wall of the enclosure should be laid with sound absorbent such as mineral wool. | To lower noise transmission                                      | DSD's Contractor     | Whole construction site | Throughout construction phase              | Construction phase    | EIAO-TM, APCO                     |
| 4.7      | N10         | Regular maintenance of plant equipment to prevent noise emission due to impair                                                                                                                                                                                | To prevent noise emission due to impair                          | DSD's Contractor     | Whole construction site | Throughout construction phase              | Construction phase    | EIAO-TM, APCO                     |
| 4.7      | N11         | Position mobile noisy equipment in location and direction away from NSR                                                                                                                                                                                       | To minimize noise transmission to NSR                            | DSD's Contractor     | Whole construction site | Throughout construction phase              | Construction phase    | EIAO-TM, APCO                     |
| 4.7      | N12         | Use silencer or muffler on plant equipment and should be properly maintained                                                                                                                                                                                  | To minimize noise transmission                                   | DSD's Contractor     | Whole construction site | Throughout construction phase              | Construction phase    | EIAO-TM, APCO                     |
| 4.7      | N13         | Throttle down or switch off unused machines or machine in Intermittent use between work                                                                                                                                                                       | To minimize noise production                                     | DSD's Contractor     | Whole construction site | Throughout construction phase              | Construction phase    | EIAO-TM, APCO                     |
| 4.7      | N14         | Make good use of stockpiles or other structures for noise screening                                                                                                                                                                                           | To minimize noise transmission                                   | DSD's Contractor     | Whole construction site | Throughout construction phase              | Construction phase    | EIAO-TM, APCO                     |
| 4.7      | N15         | Mobile plant should be sited as far away from NSRs as possible                                                                                                                                                                                                | To minimize noise transmission                                   | DSD's Contractor     | Whole construction site | Throughout construction phase              | Construction phase    | EIAO-TM, APCO                     |
| 4.7      | N16         | Reduce the percentage on-time for some noisy PMEs                                                                                                                                                                                                             | To minimize noise production                                     | DSD's Contractor     | Whole construction site | Throughout construction phase              | Construction phase    | EIAO-TM, APCO                     |
| 4.7      | N17         | Carry out noise monitoring                                                                                                                                                                                                                                    | To monitor construction noise level                              | DSD's Contractor     | At representative NSRs  | Prior to and throughout construction phase | Construction phase    | EIAO-TM, APCO                     |

|                                                                                   |                                                                          |  |  |  |  |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|--|--|--|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  |  |  |  |  | Page | M-7           |
|                                                                                   |                                                                          |  |  |  |  |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  |  |  |  |  | Rev. | 01            |
|                                                                                   |                                                                          |  |  |  |  |  | Date | Nov 25        |

| EIA Ref.                  | EM & A Ref. | Recommended Mitigation Measures *                                                                                                                                                                               | Objectives of the Recommended Measure & Main Concerns to address                              | Implementation Agent | Location of the measure | Duration of the measure       | Implementation stages | Relevant Legislation & Guidelines |
|---------------------------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|----------------------|-------------------------|-------------------------------|-----------------------|-----------------------------------|
| Water Quality Impact      |             |                                                                                                                                                                                                                 |                                                                                               |                      |                         |                               |                       |                                   |
| Project Specific Measures |             |                                                                                                                                                                                                                 |                                                                                               |                      |                         |                               |                       |                                   |
| 5.8                       | W1          | Divert the water from outfall of W3 (stream near Fairway Vista) during open cut excavation for laying of gravity sewer nearby                                                                                   | To prevent the excavated materials from falling into the water and being carried into the sea | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | ProPECC PN 1/94, EIAOTM           |
| 5.8                       | W2          | Place sandbag along the upstream section of the stream near Fairway Vista and along rocky shore during open cut excavation for laying of gravity sewers/rising mains nearby.                                    | To prevent the excavated materials from falling into the water and being carried into the sea | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction Phase    | ProPECC PN 1/94, EIAOTM           |
| 5.8                       | W3          | Intercept the water from u-channel at the foot of the slope where the STP will be built                                                                                                                         | To prevent water from entering the construction site                                          | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction Phase    | EIAO-TM                           |
| 5.8                       | W4          | Install cofferdam around the proposed excavation area for entry pit of HDD work to prevent falling of debris into the sea                                                                                       | To prevent debris from entering the waterbodies                                               | DSD's Contractor     | HDD work site           | Throughout construction phase | Construction Phase    | EIAO-TM                           |
| 5.8                       | W5          | Install sheet piles in marine waters by vibratory action.                                                                                                                                                       | To minimize dispersion of marine sediment                                                     | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | EIAO-TM                           |
| 5.8                       | W6          | Marine works (dredging, construction and installation works at diffuser location, backfilling) shall be carried out inside the watertight cofferdam. The cofferdam can only be removed after completion of work | To minimize dispersion of marine sediment                                                     | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction Phase    | EIAO-TM                           |
| 5.8                       | W7          | Dredging should be carried out by grab dredgers anchored outside the cofferdam. The marine sediment should be placed in sealed compartment of the marine barge.                                                 | To minimize dispersion of marine sediment                                                     | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction Phase    | EIAO-TM                           |
| 5.8                       | W8          | Water removed from the cofferdam should be desilted before discharge back into the sea.                                                                                                                         | To prevent discharge of silty water into the sea                                              | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | EIAO-TM                           |


|                                                                                   |                                                                          |  |  |  |  |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|--|--|--|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  |  |  |  |  | Page | M-8           |
|                                                                                   |                                                                          |  |  |  |  |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  |  |  |  |  | Rev. | 01            |
|                                                                                   |                                                                          |  |  |  |  |  | Date | Nov 25        |

| EIA Ref.                  | EM & A Ref. | Recommended Mitigation Measures *                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Objectives of the Recommended Measure & Main Concerns to address                                     | Implementation Agent | Location of the measure   | Duration of the measure                                              | Implementation stages | Relevant Legislation & Guidelines |
|---------------------------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|----------------------|---------------------------|----------------------------------------------------------------------|-----------------------|-----------------------------------|
| 5.8                       | W9          | Carry out water quality monitoring at water sensitive receivers before and during cofferdam installation works, throughout dredging works, and during cofferdam extraction works                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | To identify any water quality impact due to construction works                                       | DSD's Contractor     | Water Monitoring Stations | Before and throughout installation and extraction works of cofferdam | Construction phase    | EIAO-TM                           |
| 5.8                       | W10         | The following summarizes the precautionary measures for minimizing chance of emergency discharge: <ul style="list-style-type: none"> <li>• Provision of dual power by CLP;</li> <li>• Equipped with Supervisory control and data acquisition system (SCADA), which signals to the operation and maintenance personnel for emergency attendance in case of plant failure;</li> <li>• Provision of standby pump and screen at the PTOSTW.</li> <li>• Provision of emergency generator within 4 hours by DSD's future term contractor.</li> <li>• Provision of emergency storage with capacity of 4-hr sewage retention time.</li> <li>• Arrangement of tankers for removing incoming sewage to other sewage treatment plants for treatment.</li> </ul> | To prevent emergency discharge                                                                       | DSD                  | Sewage Treatment Plant    | Operational phase                                                    | Operational phase     | EIAO-TM                           |
| 5.8                       | W11         | Carry out water quality monitoring at water sensitive receivers during normal operation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | To identify any water quality impact due to the normal operation of the Sewage Treatment Plant (STP) | DSD                  | At representative WSRs    | 6 months before and in 1st year of operation                         | Operational phase     | WPCO, EIAO-TM                     |
| Generic/Standard Measures |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                      |                      |                           |                                                                      |                       |                                   |
| 5.8                       | W12         | Set up sedimentation tank for settling suspended solids in wastewater before discharge into storm drains. Sand/silt removal facilities such as sand traps, silt traps and sedimentation basin should be provided with adequate capacity.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | To reduce the amount of suspended solid in wastewater                                                | DSD's Contractor     | Whole construction site   | Throughout construction phase                                        | Construction phase    | ProPECC PN 1/94, EIAO-TM          |
| 5.8                       | W13         | Follow ProPECC PN 1/94 "Construction Site Drainage" as far as practicable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | To minimize surface runoff and chance of erosion                                                     | DSD's Contractor     | Whole construction site   | Throughout construction phase                                        | Construction phase    | ProPECC PN 1/94, EIAO-TM          |
| 5.8                       | W14         | Construct catchpits and perimeter channels prior to commencement of site formation works and earthworks.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | To stop runoff from flowing across the construction site                                             | DSD's Contractor     | Whole construction site   | Throughout construction phase                                        | Construction phase    | ProPECC PN 1/94, EIAO-TM          |
| 5.8                       | W15         | Maintain silt removal facilities, channels, manholes before and after rainstorm.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | To prevent failure that may lead to flooding                                                         | DSD's Contractor     | Whole construction site   | Throughout construction phase                                        | Construction phase    | ProPECC PN 1/94, EIAO-TM          |


|                                                                                  |                                                                          |  |  |  |  |  |      |               |
|----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|--|--|--|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  |  |  |  |  | Page | M-9           |
|                                                                                  |                                                                          |  |  |  |  |  | Ref# | EMA2403/03/58 |
|                                                                                  | Monthly EM&A Report                                                      |  |  |  |  |  | Rev. | 01            |
|                                                                                  |                                                                          |  |  |  |  |  | Date | Nov 25        |

| EIA Ref. | EM & A Ref. | Recommended Mitigation Measures *                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Objectives of the Recommended Measure & Main Concerns to address | Implementation Agent | Location of the measure | Duration of the measure       | Implementation stages | Relevant Legislation & Guidelines |
|----------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|----------------------|-------------------------|-------------------------------|-----------------------|-----------------------------------|
| 5.8      | W16         | Remove silt and grit from silt trap at regular interval.                                                                                                                                                                                                                                                                                                                                                                                                                                | To prevent blockage the may lead to flooding                     | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | ProPECC PN 1/94, EIAO-TM          |
| 5.8      | W17         | Well design works program to minimize the work areas to minimize the soil exposure and site runoff.                                                                                                                                                                                                                                                                                                                                                                                     | To minimize surface runoff and chance of erosion                 | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | ProPECC PN 1/94, EIAO-TM          |
| 5.8      | W18         | Arrange soil excavation works outside rainy seasons (202 to September) as far as possible. If this cannot be achieved, the following measures should be implemented:<br>- Cover temporary exposed slope surfaces with impermeable materials, e.g. tarpaulin<br>- Protect temporary access roads by crushed stone or gravel<br>- Provide intercepting channels along crest/edge of excavation<br>- Carry out adequate surface protection measures well before the arrival of a rainstorm | To minimize surface runoff and chance of erosion                 | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | ProPECC PN 1/94, EIAO-TM          |
| 5.8      | W19         | Minimize exposed earth after completion of work in a certain area by hydroseeding, vegetating, soil compacting or covering with bitumen                                                                                                                                                                                                                                                                                                                                                 | To prevent soil erosion under Rainstorm                          | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | ProPECC PN 1/94, EIAO-TM          |
| 5.8      | W20         | Prevent rainwater from entering trenches. Excavation of trenches should be dug and backfilled in short sections during rainy seasons. Remove silt in rainwater collected from the trenches or foundation excavations prior to discharge to storm drains.                                                                                                                                                                                                                                | To prevent soil erosion under Rainstorm                          | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | ProPECC PN 1/94, EIAO-TM          |
| 5.8      | W21         | Cover open stockpiles of construction materials (e.g. aggregates, sand and fill materials) with impermeable materials such as tarpaulin during rainstorms.                                                                                                                                                                                                                                                                                                                              | To prevent soil erosion under rainstorm                          | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | ProPECC PN 1/94, EIAO-TM          |
| 5.8      | W22         | Cover and temporary seal manholes to prevent silt, construction materials or debris and surface runoff from entering foul sewers.                                                                                                                                                                                                                                                                                                                                                       | To prevent overloading of foul sewers                            | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | ProPECC PN 1/94, EIAO-TM          |
| 5.8      | W23         | Remove waste from the construction site regularly.                                                                                                                                                                                                                                                                                                                                                                                                                                      | To prevent waste accumulation                                    | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | EIAO-TM, APCO                     |
| 5.8      | W24         | Apply discharge license for effluent discharge. Treat the discharge to comply with the requirement in TM-DSS.                                                                                                                                                                                                                                                                                                                                                                           | To ensure compliance with effluent discharge requirement         | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | WPCO, TM-DSS, EIAOTM              |




|                                                                                   |                                                                          |  |  |  |  |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|--|--|--|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  |  |  |  |  | Page | M-10          |
|                                                                                   |                                                                          |  |  |  |  |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  |  |  |  |  | Rev. | 01            |
|                                                                                   |                                                                          |  |  |  |  |  | Date | Nov 25        |


| EIA Ref. | EM & A Ref. | Recommended Mitigation Measures *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Objectives of the Recommended Measure & Main Concerns to address            | Implementation Agent | Location of the measure | Duration of the measure       | Implementation stages | Relevant Legislation & Guidelines                             |
|----------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|----------------------|-------------------------|-------------------------------|-----------------------|---------------------------------------------------------------|
| 5.8      | W25         | Reuse treated effluent onsite, e.g. dust suppression, wheel washing and general cleaning.                                                                                                                                                                                                                                                                                                                                                                                                 | To minimize wastewater generation                                           | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | Waste Disposal Ordinance, EIAO-TM                             |
| 5.8      | W26         | Monitor effluent water quality                                                                                                                                                                                                                                                                                                                                                                                                                                                            | To ensure compliance with effluent discharge requirement                    | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | WPCO, EIAO-TM                                                 |
| 5.8      | W27         | Register as chemical waste producer if chemical waste will be generated.                                                                                                                                                                                                                                                                                                                                                                                                                  | To control chemical waste                                                   | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | Waste Disposal (Chemical Waste) (General) Regulation, EIAO-TM |
| 5.8      | W28         | Perform maintenance of vehicles and equipment that have oil leakage and spillage potential on hard standings within a bunded area with sumps and oil interceptors.                                                                                                                                                                                                                                                                                                                        | To prevent oil leakage or spillage                                          | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | Waste Disposal (Chemical Waste) (General) Regulation, EIAO-TM |
| 5.8      | W29         | Dispose chemical waste in accordance to Waste Disposal Ordinance. Follow the <i>Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes</i> , examples as follows:<br>- Store chemical wastes with suitable containers to avoid leakage or spillage during storage, handling and transport<br>- Label chemical waste containers according to the CoP to notify and warn the waste handlers<br>- Store chemical wastes at designated safe location with adequate space | To avoid accident in waste storage and handling                             | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | Waste Disposal Ordinance, EIAO-TM                             |
| 5.8      | W30         | Provide sufficient chemical toilets with regular maintenance by registered waste collector where necessary                                                                                                                                                                                                                                                                                                                                                                                | To proper collection of tasks force waste                                   | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | Waste Disposal Ordinance, EIAO-TM                             |
| 5.8      | W31         | Provide a drip tray/container underneath the bentonite recycling system                                                                                                                                                                                                                                                                                                                                                                                                                   | To prevent any leaked bentonite from entering the watercourse or sea        | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | EIAO-TM                                                       |
| 5.8      | W32         | Carry out regular site inspection to audit the implementation of mitigation measures                                                                                                                                                                                                                                                                                                                                                                                                      | To check the implementation status and effectiveness of mitigation measures | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | EIAO-TM, APCO                                                 |
| 5.8      | W33         | Carry out effluent quality monitoring at location specified in the discharge licence                                                                                                                                                                                                                                                                                                                                                                                                      | To ensure compliance with effluent discharge requirement                    | DSD                  | Effluent outlet         | Operational phase             | Operational phase     | WPCO, EIAO-TM                                                 |

|                                                                                  |                                                                          |  |  |  |  |  |      |               |
|----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|--|--|--|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  |  |  |  |  | Page | M-11          |
|                                                                                  |                                                                          |  |  |  |  |  | Ref# | EMA2403/03/58 |
|                                                                                  | Monthly EM&A Report                                                      |  |  |  |  |  | Rev. | 01            |
|                                                                                  |                                                                          |  |  |  |  |  | Date | Nov 25        |


| EIA Ref.                  | EM & A Ref. | Recommended Mitigation Measures *                                                                                                                                                                                                                                                                                           | Objectives of the Recommended Measure & Main Concerns to address                              | Implementation Agent | Location of the measure | Duration of the measure                                     | Implementation stages | Relevant Legislation & Guidelines |
|---------------------------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|----------------------|-------------------------|-------------------------------------------------------------|-----------------------|-----------------------------------|
| Terrestrial Ecology       |             |                                                                                                                                                                                                                                                                                                                             |                                                                                               |                      |                         |                                                             |                       |                                   |
| Project Specific Measures |             |                                                                                                                                                                                                                                                                                                                             |                                                                                               |                      |                         |                                                             |                       |                                   |
| 6.12                      | E1          | Erect bright color fencing along the boundary of the undisturbed region of the shrubland and woodland, and around <i>Diospyros vaccinioides</i> , a plant species of conservation importance, near the work boundary to remind workers not to trespass or occupy the area, and to be careful during operation of equipment. | To protect the shrub from being Damaged                                                       | DSD's Contractor     | Whole construction site | Throughout construction phase                               | Construction phase    | EIAO-TM                           |
| 6.12                      | E2          | Reinstate the disturbed rocky shore with the rocks temporarily removed                                                                                                                                                                                                                                                      | To restore the rocky shore habitat                                                            | DSD's Contractor     | HDD work site           | After completion of works near the rocky shore              | Construction Phase    | EIAO-TM                           |
| 6.12                      | E3          | Place sandbag around the section of W3 next to Fairway Vista and along the shore during open cut excavation for laying of gravity sewer nearby.                                                                                                                                                                             | To prevent the excavated materials from falling into the water and being carried into the sea | DSD's Contractor     | Whole construction site | When construction work is carried out in the vicinity of W3 | Construction Phase    | EIAO-TM                           |
| 6.12                      | E4          | Temporarily divert the water from outfall of W3 away from excavation area.                                                                                                                                                                                                                                                  | To prevent the excavated materials from falling into the water and being carried into the sea | DSD's Contractor     | Whole construction site | When construction work is carried out in the vicinity of W3 | Construction Phase    | EIAO-TM                           |
| 6.12                      | E5          | Inspect the condition of the <i>Diospyros vaccinioides</i> near the work boundary as part of weekly site audit                                                                                                                                                                                                              | To inspect the condition of the <i>Diospyros vaccinioides</i>                                 | DSD's Contractor     | Whole construction site | Throughout construction phase                               | Construction phase    | EIAO-TM                           |
| Generic/Standard Measures |             |                                                                                                                                                                                                                                                                                                                             |                                                                                               |                      |                         |                                                             |                       |                                   |
| 6.12                      | E6          | Erection of hoarding, fencing or provision of clear demarcation of work zones                                                                                                                                                                                                                                               | To remind workers not to damage area outside the work boundary                                | DSD's Contractor     | Whole construction site | Throughout construction phase                               | Construction Phase    | EIAO-TM                           |
| 6.12                      | E7          | Designate areas for placement of equipment, building materials and wastes away from the natural environment                                                                                                                                                                                                                 | To prevent damage on the natural environment                                                  | DSD's Contractor     | Whole construction site | Throughout construction phase                               | Construction Phase    | EIAO-TM                           |
| 6.12                      | E8          | Carry out tree preservation and compensatory tree planting will be carried out in accordance with DEVB TCW No. 7/2015.                                                                                                                                                                                                      | To reinstated woodland habitat                                                                | DSD's Contractor     | Whole construction site | After completion of works near woodland                     | Construction phase    | EIAO-TM                           |

|                                                                                   |                                                                          |  |  |  |  |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|--|--|--|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  |  |  |  |  | Page | M-12          |
|                                                                                   |                                                                          |  |  |  |  |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  |  |  |  |  | Rev. | 01            |
|                                                                                   |                                                                          |  |  |  |  |  | Date | Nov 25        |


| EIA Ref.                  | EM & A Ref. | Recommended Mitigation Measures *                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Objectives of the Recommended Measure & Main Concerns to address | Implementation Agent | Location of the measure | Duration of the measure       | Implementation stages | Relevant Legislation & Guidelines                             |
|---------------------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|----------------------|-------------------------|-------------------------------|-----------------------|---------------------------------------------------------------|
| Terrestrial Ecology       |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                  |                      |                         |                               |                       |                                                               |
| Project Specific Measures |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                  |                      |                         |                               |                       |                                                               |
| 9.8                       | WM1         | Sludge will be delivered by sealed sludge tanker for treatment at Sludge Treatment Facilities                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | To prevent odour nuisance                                        | DSD                  | STP                     | Throughout construction phase | Operational phase     | Waste Disposal (Chemical Waste) (General) Regulation, EIAO-TM |
| 9.8                       | WM2         | Debris from screening process and general refuse should be stored within the STP in sealed container and be disposed of at landfill regularly.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | To prevent odour nuisance                                        | DSD                  | STP                     | Throughout construction phase | Operational phase     | Waste Disposal (Chemical Waste) (General) Regulation, EIAO-TM |
| 9.8                       | WM3         | Worn filters and MBR membrane shall be stored and labelled as in construction phase. Chemical wastes shall be treated at chemical treatment facility by licensed contractor                                                                                                                                                                                                                                                                                                                                                                                                                                                          | To prevent odour nuisance                                        | DSD                  | STP                     | Throughout construction phase | Operational phase     | Waste Disposal Ordinance, EIAO-TM                             |
| Generic/Standard Measures |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                  |                      |                         |                               |                       |                                                               |
| 9.8                       | WM4         | <p>Allocate an area for waste sorting and storage of C&amp;D materials into the following categories for reuse, recycle or disposal if possible. Remove waste from the construction site for sorting once generated if no suitable space can be identified.</p> <ul style="list-style-type: none"> <li>- excavated materials suitable for reuse</li> <li>- inert C&amp;D materials (or public fill) for disposal offsite</li> <li>- non-inert C&amp;D materials (or C&amp;D waste) for disposal at landfills</li> <li>- chemical waste</li> <li>- bentonite slurry for reconditioning and reuse</li> <li>- general refuse</li> </ul> | To minimize waste generation                                     | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction Phase    | Waste Disposal Ordinance, EIAO-TM                             |

|                                                                                   |                                                                          |  |  |  |  |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|--|--|--|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  |  |  |  |  | Page | M-13          |
|                                                                                   |                                                                          |  |  |  |  |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  |  |  |  |  | Rev. | 01            |
|                                                                                   |                                                                          |  |  |  |  |  | Date | Nov 25        |


| EIA Ref. | EM & A Ref. | Recommended Mitigation Measures *                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Objectives of the Recommended Measure & Main Concerns to address | Implementation Agent | Location of the measure | Duration of the measure       | Implementation stages | Relevant Legislation & Guidelines |
|----------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|----------------------|-------------------------|-------------------------------|-----------------------|-----------------------------------|
| 9.8      | WM5         | <p>Adopt good site practice as follows:</p> <ul style="list-style-type: none"> <li>- Provide training to workers on site cleanliness, waste management (waste reduction, reuse and recycle) and chemical handling procedures</li> <li>- Provide sufficient waste collection points and regular removal</li> <li>- Cover waste materials with tarpaulin or in enclosure during transportation</li> <li>- Maintain drainage systems, sumps and oil interceptors</li> <li>- Sort out chemical waste for proper handling and treatment onsite or offsite</li> </ul>                                                                                                  | To proper handling of waste                                      | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | Waste Disposal Ordinance, EIAO-TM |
| 9.8      | WM6         | <p>Adopt waste reduction measures as follows:</p> <ul style="list-style-type: none"> <li>- Allocate area/containers for sorting, recovering and storing waste for reuse, recycle or disposal (e.g. demolition debris and excavated materials, general refuse like aluminium cans.)</li> </ul> <p>Remove waste from the construction site for sorting once generated if no suitable space can be identified.</p> <ul style="list-style-type: none"> <li>- Allocate area for proper storage of construction materials to prevent contamination</li> <li>- Minimize wastage through careful planning and avoiding overpurchase of construction materials</li> </ul> | To minimize waste generation                                     | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | Waste Disposal Ordinance, EIAO-TM |
| 9.8      | WM7         | <p>Prepare and implement a site-specific Waste Management Plan (WMP) as part of Environmental Management Plan (EMP) in accordance with ETWB TCW No. 19/2005. Detail waste management method in the form of avoidance, reuse, recovery, recycling, storage, collection, treatment and disposal according to the recommendations on the EIA and EM&amp;A Manual. It should be approved by the ER and regularly reviewed.</p>                                                                                                                                                                                                                                       | To provide guidance to waste management                          | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | ETWB TCW No. 19/2005, EIAO-TM     |

|                                                                                   |                                                                                 |  |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|--|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> |  | Page | M-14          |
|                                                                                   |                                                                                 |  | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  |  | Rev. | 01            |
|                                                                                   |                                                                                 |  | Date | Nov 25        |


| EIA Ref. | EM & A Ref. | Recommended Mitigation Measures *                                                                                                                                                                                                                                                                                                | Objectives of the Recommended Measure & Main Concerns to address | Implementation Agent | Location of the measure | Duration of the measure       | Implementation stages | Relevant Legislation & Guidelines                                                                                                                                                                                                |
|----------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|----------------------|-------------------------|-------------------------------|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 9.8      | WM8         | Store waste materials properly as follows:<br>- Avoid contamination by proper handling and storing waste<br>- Prevent erosion by covering waste<br>- Apply water spray on excavated materials<br>- Maintain and clean storage area regularly<br>- Sort and stockpile different materials at designated location to enhance reuse | To properly store waste                                          | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | ProPECC PN 1/94, EIAOTM                                                                                                                                                                                                          |
| 9.8      | WM9         | Apply for relevant waste disposal permits in accordance with the Waste Disposal Ordinance (Cap. 354), Waste Disposal (Charges for Disposal of Construction Waste) Regulation (Cap. 345) and the Land (Miscellaneous Provisions) Ordinance (Cap. 28), Dumping at Sea Ordinance (Cap. 466).                                        | To properly dispose waste                                        | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | Waste Disposal Ordinance (Cap. 354), Waste Disposal (Charges for Disposal of Construction Waste) Regulation (Cap. 345) and the Land (Miscellaneous Provisions) Ordinance (Cap. 28), Dumping at Sea Ordinance (Cap. 466), EIAO-TM |
| 9.8      | WM10        | Hire licensed waste disposal contractors for waste collection and removal. Dispose waste at licensed waste disposal facilities                                                                                                                                                                                                   | To properly dispose waste                                        | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | Waste Disposal Ordinance, EIAO-TM                                                                                                                                                                                                |
| 9.8      | WM11        | Implement trip-ticket system for recording the amount of waste generated, recycled and disposed, including chemical wastes                                                                                                                                                                                                       | To monitor movement of waste                                     | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | Waste Disposal (Chemical Waste) (General) Regulation, Waste Disposal Ordinance, EIAO-TM                                                                                                                                          |
| 9.8      | WM12        | Provide wheel washing at construction site exit to clean the vehicle body and wheel                                                                                                                                                                                                                                              | To prevent dust from being brought offsite                       | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | ProPECC PN 1/94, EIAOTM                                                                                                                                                                                                          |
| 9.8      | WM13        | Reduce water content in wet spoil generated from piling work by mixing with dry materials. Only dispose treated spoil with less than 25% dry density to Public Fill Reception Facilities                                                                                                                                         | To minimize load to reception facilities                         | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | Waste Disposal Ordinance, EIAO-TM                                                                                                                                                                                                |

|                                                                                   |                                                                                 |  |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|--|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> |  | Page | M-15          |
|                                                                                   |                                                                                 |  | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  |  | Rev. | 01            |
|                                                                                   |                                                                                 |  | Date | Nov 25        |

| EIA Ref. | EM & A Ref. | Recommended Mitigation Measures *                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Objectives of the Recommended Measure & Main Concerns to address | Implementation Agent | Location of the measure | Duration of the measure       | Implementation stages | Relevant Legislation & Guidelines                             |
|----------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|----------------------|-------------------------|-------------------------------|-----------------------|---------------------------------------------------------------|
| 9.8      | WM14        | Dispose dry waste or waste with less than 70% water content by weight to landfill                                                                                                                                                                                                                                                                                                                                                                                                                                                   | To minimize load to reception facilities                         | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | Waste Disposal Ordinance, EIAO-TM                             |
| 9.8      | WM15        | Follow the <i>Code of Practice on the Packaging, Labelling and Storage of Chemical Waste</i> as follows:<br>- Store chemical wastes with suitable containers. Seal and maintain the container to avoid leakage or spillage during storage, handling and transport<br>- Label chemical waste containers in both English and Chinese with instructions in accordance to Schedule 2 of the Waste Disposal (Chemical Waste) (General) Regulation<br>- The container capacity should be smaller than 450 litres unless agreed by the EPD | To avoid accident in waste storage and handling                  | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | Waste Disposal Ordinance, EIAO-TM                             |
| 9.8      | WM16        | Comply with the requirement of the chemical storage area:<br>- Store only chemical waste and label clearly the chemical characters of the waste<br>- Have at least 3 sides enclosed and protected from rainfall with cover<br>- Provide sufficient ventilation<br>- Have impermeable floor and has bunds to contain 110% of the capacity of the largest container or 20% of the total volume of the stored waste in the area, whichever is larger<br>- Adequately spaced incompatible materials                                     | To ensure proper storage of chemical waste                       | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | Waste Disposal Ordinance, EIAO-TM                             |
| 9.8      | WM17        | Transfer used lubricants, waste oils and other chemicals to oil recycling companies, if possible, and empty oil drums for reuse or refill. No direct or indirect discharge is permitted                                                                                                                                                                                                                                                                                                                                             | To ensure proper disposal of chemical waste                      | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | Waste Disposal (Chemical Waste) (General) Regulation, EIAO-TM |
| 9.8      | WM18        | Hire licensed chemical waste disposal contractors for waste collection and removal. Dispose chemical waste at the approved Chemical Waste Treatment Centre at Tsing Yi or other licensed facility                                                                                                                                                                                                                                                                                                                                   | To ensure proper disposal of chemical waste                      | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | Waste Disposal (Chemical Waste) (General) Regulation, EIAO-TM |
| 9.8      | WM19        | Hire reputable waste collector to Separately collect and dispose general refuse from other wastes. Cover the waste to prevent being blown away                                                                                                                                                                                                                                                                                                                                                                                      | To ensure proper disposal of general refuse                      | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | Waste Disposal (Chemical Waste) (General) Regulation, EIAO-TM |


|                                                                                   |                                                                                 |  |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|--|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> |  | Page | M-16          |
|                                                                                   |                                                                                 |  | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  |  | Rev. | 01            |
|                                                                                   |                                                                                 |  | Date | Nov 25        |

| EIA Ref. | EM & A Ref. | Recommended Mitigation Measures *                                                                                                                                                                                                  | Objectives of the Recommended Measure & Main Concerns to address                              | Implementation Agent | Location of the measure | Duration of the measure       | Implementation stages | Relevant Legislation & Guidelines |
|----------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|----------------------|-------------------------|-------------------------------|-----------------------|-----------------------------------|
| 9.8      | WM20        | Provide recycling bins for sorting out recyclables for collection by recycling companies. Non-recyclables should be removed to designated landfills every day by licensed collectors to prevent environmental and health nuisance. | To ensure proper recycling and disposal of general refuse                                     | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | Waste Disposal Ordinance, EIAO-TM |
| 9.8      | WM21        | Organize training and reminders to site staff on waste minimization through avoidance and reduction, reusing and recycling                                                                                                         | To ensure proper management of general refuse                                                 | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | EIAO-TM                           |
| 9.8      | WM22        | Used bentonite shall be reconditioned onsite and reused as far as practical to minimize wastage. If this is deemed not viable, the used bentonite shall be delivered offsite for reconditioning.                                   | To minimize wastage of bentonite                                                              | DSD's Contractor     | Whole construction site | Throughout construction phase | Construction phase    | EIAO-TM                           |
| 9.8      | WM23        | Characterize the sediment quality of the marine sediment to be dredged and submit a Sediment Quality Report for EPD's approval. Dispose the dredged marine sediment in accordance with ETWB TC(W) No. 34/2002                      | To verify the categories of sediment to be disposed in accordance with ETWB TC(W) No. 34/2002 | DSD's Contractor     | To be allocated by CEDD | Before dredging works         | Construction phase    | ETWB TC(W) No. 34/2002            |


|                                                                                  |                                                                          |  |  |  |  |  |      |               |
|----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|--|--|--|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  |  |  |  |  | Page | M-17          |
|                                                                                  |                                                                          |  |  |  |  |  | Ref# | EMA2403/03/58 |
|                                                                                  | Monthly EM&A Report                                                      |  |  |  |  |  | Rev. | 01            |
|                                                                                  |                                                                          |  |  |  |  |  | Date | Nov 25        |

| EIA Ref.                  | EM & A Ref. | Recommended Mitigation Measures *                                                                                                                                                                                                                                                | Objectives of the Recommended Measure & Main Concerns to address | Implementation Agent             | Location of the measure                                                                                            | Duration of the measure                              | Implementation stages                       | Relevant Legislation & Guidelines                      |
|---------------------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|----------------------------------|--------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|---------------------------------------------|--------------------------------------------------------|
| Project Specific Measures |             |                                                                                                                                                                                                                                                                                  |                                                                  |                                  |                                                                                                                    |                                                      |                                             |                                                        |
| Table 10-6                | CM8         | Protective materials to be provided to natural rocky coastline to prevent damage to existing landform from plant and machinery during temporary drilling operations. Reinstatement following removal of plant & equipment to original or improved condition shall be undertaken. | To protect landscape resources                                   | DSD's contractor                 | Temporary drilling site for submarine outfall                                                                      | Construction planning and during construction period | Construction phase                          | Particular Specification                               |
| Table 10-7                | OM1         | Sensitive design of sewage treatment plant in terms of scale, height and bulk (visual weight) to integrate the building into the existing topography.                                                                                                                            | To mitigate visual impacts                                       | DSD's Design Architect/ Engineer | STP                                                                                                                | Design Phase                                         | Design Phase                                | Detailed Design Drawings and Specifications            |
| Table 10-7                | OM2         | Use of appropriate building materials and colors for Sewage Treatment Plant to complement surroundings                                                                                                                                                                           | To mitigate visual impacts                                       | DSD's Design Architect/ Engineer | STP                                                                                                                | Design Phase                                         | Design, Construction and Operational Phases | Detailed Design Drawings and Specifications            |
|                           |             |                                                                                                                                                                                                                                                                                  |                                                                  | DSD's contractor                 |                                                                                                                    | Construction Phase & first year in Operational Phase |                                             |                                                        |
|                           |             |                                                                                                                                                                                                                                                                                  |                                                                  | Building Operator/DSD            |                                                                                                                    | Operational phase                                    |                                             |                                                        |
| Generic/Standard Measures |             |                                                                                                                                                                                                                                                                                  |                                                                  |                                  |                                                                                                                    |                                                      |                                             |                                                        |
| Table 10-6                | CM1         | The construction area and contractor's temporary works areas should be minimized to avoid impacts on adjacent landscape. All slope excavation shall take place from within the work boundary to minimize impacts on adjacent slopes.                                             | To avoid impact on adjacent landscape areas                      | DSD's Contractor                 | STP, along gravity sewers and rising mains construction route and at temporary drilling site for submarine outfall | Construction planning and during construction period | Construction Phase                          | Detailed Design drawings and particular specifications |
| Table 10-6                | CM2         | Reduction of construction period to practical minimum                                                                                                                                                                                                                            | To minimize duration of impact                                   | DSD's contractor                 | N/A                                                                                                                | Construction planning and during construction period | Construction phase                          | N/A                                                    |




|                                                                                   |                                                                                 |  |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|--|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> |  | Page | M-18          |
|                                                                                   |                                                                                 |  | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  |  | Rev. | 01            |
|                                                                                   |                                                                                 |  | Date | Nov 25        |


| EIA Ref.   | EM & A Ref. | Recommended Mitigation Measures *                                                                                                                | Objectives of the Recommended Measure & Main Concerns to address       | Implementation Agent | Location of the measure                                                                                                      | Duration of the measure                              | Implementation stages | Relevant Legislation & Guidelines   |
|------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|----------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|-----------------------|-------------------------------------|
| Table 10-6 | CM3         | Construction traffic (land and sea) including construction plant, construction vessels and barges to be kept to a practical minimum.             | To minimize visual impacts to local residents and surrounding VSRs     | DSD's Contractor     | STP, along gravity sewers and rising mains construction route at temporary drilling and dredging sites for submarine outfall | Construction planning and during construction period | Construction phase    | As per the Particular Specification |
| Table 10-6 | CM4         | Erection of decorative mesh screens or construction hoardings and/or temporary noise barriers around works areas in visually unobtrusive colors. | To screen construction works from local residents and surrounding VSRs | DSD's Contractor     | STP, along gravity sewers and rising mains construction route and at temporary drilling site for submarine outfall           | Construction planning and during construction period | Construction phase    | As per the Particular Specification |
| Table 10-6 | CM5         | Avoidance of excessive height and bulk of site buildings and structures.                                                                         | To reduce visual impact                                                | DSD's Contractor     | STP, and at temporary drilling site for submarine outfall                                                                    | Construction planning and during construction period | Construction phase    | As per the Particular Specification |
| Table 10-6 | CM6         | Control of night-time lighting by hooding all lights and through minimization of night working periods.                                          | To maximize screening of the works                                     | DSD's Contractor     | STP and at temporary drilling and dredging site for submarine outfall                                                        | Construction planning and during construction period | Construction phase    | As per the Particular Specification |

|                                                                                   |                                                                                 |  |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|--|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> |  | Page | M-19          |
|                                                                                   |                                                                                 |  | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  |  | Rev. | 01            |
|                                                                                   |                                                                                 |  | Date | Nov 25        |

| EIA Ref.   | EM & A Ref. | Recommended Mitigation Measures *                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Objectives of the Recommended Measure & Main Concerns to address | Implementation Agent             | Location of the measure              | Duration of the measure                              | Implementation stages                       | Relevant Legislation & Guidelines                                                                                                          |
|------------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|----------------------------------|--------------------------------------|------------------------------------------------------|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Table 10-6 | CM7         | All existing trees shall be carefully protected during construction. A Detailed Tree Protection Specification shall be provided in the Contract Specification. Under this specification, the Contractor shall be required to submit, for approval, a detailed working method statement for the protection of trees prior to undertaking any works adjacent to all retained trees, including trees in contractor's works areas. Tree risk assessment shall be undertaken to all existing trees within the project site as per "Guidelines for Tree Risk Assessment and Management Arrangement" | To maximize protection of existing trees                         | DSD's Contractor                 | STP and all other construction areas | Construction planning and during construction period | Construction phase                          | As per Tree Protection Particular Specification, DEVB TC (W) No.10/2013 and Guidelines for Tree Risk Assessment and Management Arrangement |
| Table 10-7 | OM3         | Lighting units to be directional and minimize unnecessary light spill and glare.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | To mitigate visual impacts                                       | DSD's Design Architect/ Engineer | STP                                  | Design Phase                                         | Design, Construction and Operational Phases | Detailed Design Drawings and Specifications                                                                                                |
|            |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                  | DSD's contractor                 |                                      | Construction Phase & first year in Operational Phase |                                             |                                                                                                                                            |
|            |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                  | Building Operator/DSD            |                                      | Operational phase                                    |                                             |                                                                                                                                            |
| Table 10-7 | OM4         | Greening measures to reinstate the landscape which are appropriate to the context, including tree and shrub planting and vertical greening, shall be implemented.                                                                                                                                                                                                                                                                                                                                                                                                                             | To mitigate visual impacts                                       | DSD's Design Landscape Architect | STP                                  | Design Phase                                         | Design, Construction and Operational Phases | Detailed Design Drawings and Specifications                                                                                                |
|            |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                  | DSD's contractor                 |                                      | Construction Phase & first year in Operational Phase |                                             |                                                                                                                                            |
|            |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                  | Building Operator/DSD            |                                      | Operational phase                                    |                                             |                                                                                                                                            |


|                                                                                   |                                                                                 |  |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|--|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> |  | Page | M-20          |
|                                                                                   |                                                                                 |  | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  |  | Rev. | 01            |
|                                                                                   |                                                                                 |  | Date | Nov 25        |

| EIA Ref.   | EM & A Ref. | Recommended Mitigation Measures *                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Objectives of the Recommended Measure & Main Concerns to address | Implementation Agent             | Location of the measure                                  | Duration of the measure                              | Implementation stages                       | Relevant Legislation & Guidelines                                                                                                                                               |
|------------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|----------------------------------|----------------------------------------------------------|------------------------------------------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Table 10-7 | OM5         | Compensatory tree planting for all felled trees shall be provided to the satisfaction of relevant Government departments. Required numbers and locations of compensatory trees shall be determined and agreed Separately with Government during the Tree Felling Application process under the relevant technical circulars. Tree risk assessment shall be undertaken to all existing trees within the project site as per "Guidelines for Tree Risk Assessment and Management Arrangement" | To mitigate landscape and visual impacts of tree loss            | DSD's Landscape Architect        | STP and at temporary drilling site for submarine outfall | Design Phase                                         | Design, Construction and Operational Phases | As per approved Tree Removal Application, Detailed Design Drawings, Tree Protection Particular Specification and Guidelines for Tree Risk Assessment and Management Arrangement |
|            |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                  | Contractor's Landscape Architect |                                                          | Construction Phase & first year in Operational Phase |                                             |                                                                                                                                                                                 |
|            |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                  | Building Operator/DSD            |                                                          | Operational phase                                    |                                             |                                                                                                                                                                                 |

|                                                                                   |                                                                          |  |  |  |  |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|--|--|--|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  |  |  |  |  | Page | M-21          |
|                                                                                   |                                                                          |  |  |  |  |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  |  |  |  |  | Rev. | 01            |
|                                                                                   |                                                                          |  |  |  |  |  | Date | Nov 25        |


| EIA Ref.                  | EM & A Ref. | Recommended Mitigation Measures *                                                                                                                                                                                                                                    | Objectives of the Recommended Measure & Main Concerns to address                                      | Implementation Agent | Location of the measure | Duration of the measure                   | Implementation stages | Relevant Legislation & Guidelines |
|---------------------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|----------------------|-------------------------|-------------------------------------------|-----------------------|-----------------------------------|
| Built Heritage            |             |                                                                                                                                                                                                                                                                      |                                                                                                       |                      |                         |                                           |                       |                                   |
| Project Specific Measures |             |                                                                                                                                                                                                                                                                      |                                                                                                       |                      |                         |                                           |                       |                                   |
| 11.6                      | BH1         | Undertake condition survey by professional qualified building surveyor or engineer to record the existing condition of the built heritage resources.                                                                                                                 | To record the condition of the built heritage resources before the commencement of construction works | DSD's Contractor     | GB01, BH02, LF04        | Before commencement of construction works | Construction Phase    | EIAO-TM and Guidelines for CHIA   |
| 11.6                      | BH2         | Carry out vibration and settlement monitoring to built heritage resources. A maximum vibration level 7.5mm/s shall be adopted for the Grade 3 Hung Shing Temple and settlement check points in the Alert/Alarm/Action limit levels at 6mm/8mm/10mm shall be adopted. | To minimize the potential impact by mechanical vibration and settlement of built heritage resources   | DSD's Contractor     | GB01, BH02, LF04        | During construction works                 | Construction phase    | EIAO-TM and Guidelines for CHIA   |
| 11.6                      | BH3         | Provision of protective covering or protective screen to built heritage resources which are close to the works area                                                                                                                                                  | To prevent direct impact from the machine and damages by construction tools or waste                  | DSD's Contractor     | GB01, BH02, LF01, LF04  | During construction works                 | Construction phase    | EIAO-TM and Guidelines for CHIA   |
| 11.6                      | BH4         | Maintain public access to the cultural landscape features as far as possible                                                                                                                                                                                         | To avoid the proposed works affecting the worshippers                                                 | DSD's Contractor     | LF01, LF04, LF05        | During construction works                 | Construction phase    | EIAO-TM and Guidelines for CHIA   |
| 11.6                      | BH5         | Provision of buffer zone of at least 1m from the proposed works as far as possible                                                                                                                                                                                   | To avoid the proposed works affecting the worshippers                                                 | DSD's Contractor     | BH02, LF01, LF04        | During construction works                 | Construction phase    | EIAO-TM and Guidelines for CHIA   |

\* All recommendations and requirements resulted during the course of EIA Process, including ACE and/or accepted public comment to the proposed pro

|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | N-1           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |

## APPENDIX N - RECOMMENDED MITIGATION MEASURES AND PROACTIVE ENVIRONMENTAL PROTECTION PROFORMA


---

|                                                                                   |                                                                                 |  |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|--|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> |  | Page | N-2           |
|                                                                                   |                                                                                 |  | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  |  | Rev. | 01            |
|                                                                                   |                                                                                 |  | Date | Nov 25        |


Construction Works Area: PTO-SW-03, PTO-Trenchless -01& STP

Anticipated Impacts: Dust, Noise, Water Quality, Terrestrial Ecology, Marine Ecology, Fisheries, Waste Management, Landscape and Visual and Build Heritage Impact

| Item               | EIA Ref. | EM&A Ref. | Environmental Aspect                                                                                                                                                                                                                                                                                                                            | Corresponding Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | EM&A Manual Recommended Mitigation/ Actions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Action By  | Measurement Procedures/Methods                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------|----------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Air Quality Impact | 3.8      | A10 - A25 | <p>a) Major air quality impact in construction phase would arise from excavation of slope at the proposed sewage treatment plant.</p> <p>b) Excavation, Gas welding, slope cutting, Rock dowel, fencing, flexible barrier installation Loading &amp; Unloading Dusty Materials storage, Dusty Waste Sorting, Temporary Site Traffic Control</p> | <p>a) All construction plants / machineries will be checked / serviced on a regular basis during the courses of construction to minimize the emission of noise generation and eliminate dark smoke emission.</p> <p>b) All dump trucks will be equipped with mechanical covers to prevent the dust emission during transportation when necessary.</p> <p>c) Dust control measures, such as water spraying, will be provided during demolition works when necessary.</p> <p>d) Maintaining of wet surface on access road and keep slow speed in the site.</p> <p>e) Conditions in the Environmental Permit and Discharge License should be followed.</p> <p>f) Predict required quantity of concrete accurately and collect the unused fresh concrete at designated locations in the site for subsequent disposal.</p> <p>g) Provide sufficient mitigation measures as recommended in approved EIA Manual requirement.</p> | <p>(a) Hoarding of not less than 2.4 m high shall be erected from ground level to surround the work area along Po Toi O Chuen Road except for a site entrance or exit.</p> <p>(b) Good housekeeping to minimize dust generation, e.g. by properly handling and storing dusty materials.</p> <p>(c) Adopt dust control measures, such as dust suppression using water spray on exposed soil at least 4 times a day, in areas with dusty construction activities and during material handling.</p> <p>(d) Minimize exposed earth after completion of work in a certain area by hydroseeding, vegetating, soil compacting or covering with bitumen.</p> <p>(e) Provide wheel washing at site exit to prevent carrying dust outside of the site.</p> <p>(f) Cover materials on trucks before leaving the site.</p> <p>(g) Limit vehicle speed of construction trucks within the construction site and in Po Toi O, maximum at 10km/hr, and confine vehicle movement in haul road.</p> <p>(h) As there is limited space in Po Toi O, stockpiling should be avoided. However, if found necessary, the materials should be covered by impervious materials such as tarpaulin.</p> | Contractor | <p>a) 1-hour and 24-hour TSP levels will be measured in accordance to the standard high-volume sampling method as set out in the Title 40 of the Code of Federal Regulations, Chapter 1 (Part 50), Appendix A.</p> <p>b) Due to objection from the residents of Po Toi O village of the use of high-volume sampler (HVS) in conducting 24-hours TSP measurement, 24-hour TSP measures for impact monitoring is to be measured by portable dust meters during construction phase of the project. This is to be approved and verified by ER and IEC.</p> <p>c) Other than using high volume sampler, 1-hour TSP levels can be measured alternatively by direct reading from portable dust meters upon approval from ER. The meters should be capable of producing comparable results as that by the high-volume sampling method, to indicate short event impacts.</p> <p>d) -The ET shall agree with the IEC on the monitoring position and the corrections adopted.</p> <p>e) -The agreed position shall be chosen in subsequent baseline and impact monitoring.</p> |


|                                                                                   |                                                                                 |  |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|--|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> |  | Page | N-3           |
|                                                                                   |                                                                                 |  | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  |  | Rev. | 01            |
|                                                                                   |                                                                                 |  | Date | Nov 25        |

| Item                 | EIA Ref. | EM&A Ref. | Environmental Aspect                                                                                                                                                                                                                                                                                                                                                                                                                                        | Corresponding Mitigation Measures                                                                                                                                                              | EM&A Manual Recommended Mitigation/ Actions | Action By  | Measurement Procedures/Methods                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------|----------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Noise Impact Control | 4.7      | N1 - N175 | <p>a) The Project comprises three main works including the construction of sewage treatment plant (STP), underground sewers and rising main, and the submarine outfall.</p> <p>b) The major noise impact will arise from the use of powered mechanical equipment.</p> <p>c) Excavation, Gas welding, slope cutting, Rock dowel, fencing, flexible barrier installation Loading &amp; Unloading Dusty Materials storage, Temporary Site Traffic Control.</p> | <p>a) Conditions in the Environmental Permit and Discharge License should be followed.</p> <p>b) Provide sufficient mitigation measures as recommended in approved EIA Manual requirement.</p> |                                             | Contractor | <p>a) Noise measurement shall normally be at a point 1 m from the exterior of the sensitive receiver building façade and be at a position 1.2 m above the ground. If the normal monitoring position cannot be accessed, an alternative position may be chosen, and a correction to the measurements shall be made. For reference, a correction of +3 dB(A) shall be made to the free field measurements.</p> <p>b) The ET shall agree with the IEC on the monitoring position and the corrections adopted.</p> <p>c) The agreed position shall be chosen in subsequent baseline and impact monitoring.</p> |


|                                                                                   |                                                                                 |  |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|--|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> |  | Page | N-4           |
|                                                                                   |                                                                                 |  | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  |  | Rev. | 01            |
|                                                                                   |                                                                                 |  | Date | Nov 25        |

| Item                 | EIA Ref. | EM&A Ref. | Environmental Aspect                                                                                                                                                                     | Corresponding Mitigation Measures                                                                                                                                                  | EM&A Manual Recommended Mitigation/ Actions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Action By  | Measurement Procedures/Methods                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------|----------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Water Quality impact | 5.8      | W1-W33    | a) Major Water quality impact will be originated from minor displacement of suspended solids during installation, testing pipe and extraction of cofferdam around the proposed diffuser. | <p>a) Wastewater to be treated by wastewater treatment facilities before discharge.</p> <p>b) Conditions in the Environmental Permit and Discharge License should be followed.</p> | <p>a) Well manage construction materials, chemicals, sewage for proper storage and usage and to prevent accumulation onsite.</p> <p>(b) Immediately clean up contaminated soil upon chemical and oil leakage.</p> <p>(c) Label chemical waste containers according to the Code of Practice to notify and warn the waste handlers. Store fuels, chemicals and chemical waste at designated area with locks and bunds.</p> <p>(d) Register as chemical waste producer.</p> <p>(e) Set up sedimentation tank for settling suspended solids in wastewater before discharge into storm drains. Sand/silt removal facilities such as sand traps, silt traps and sedimentation basin should be provided with adequate capacity.</p> <p>(f) Provide sufficient number of chemical toilets if necessary and employ licensed contractor for regular clean-up and maintenance.</p> <p>(g) Provide wheel washing at site exit to prevent dust and silty water from leaving the construction site.</p> <p>(h) Cover slope and loose materials with tarpaulin before rainstorm and inspect the area afterwards.</p> <p>(i) Cover manhole to prevent silt, construction materials or debris and surface runoff from entering the foul sewer.</p> <p>(j) Install fully enclosed cofferdam around the proposed diffuser and deploy a dredger barge outside the cofferdam for dredging and filling works.</p> | Contractor | <p>a) Weekly site audit to monitor the implementation of the proposed water quality mitigation measures and check the Contractor's work practice on water pollution prevention during construction phase.</p> <p>b) Should water pollution is observed (e.g. discharge of silty water into storm drains), the ET should record the environmental deficiency for investigation.</p> <p>c) The Contractor should be notified and responsible for carrying out rectification work immediately.</p> <p>d) The ET shall re-inspect the Project Site and review the effectiveness of the remedial measure performed until satisfaction.</p> <p>e) The Contractor shall implement preventive measure to avoid causing the same problem.</p> |




|                                                                                   |                                                                          |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  | Page | N-5           |
|                                                                                   |                                                                          |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  | Rev. | 01            |
|                                                                                   |                                                                          |  | Date | Nov 25        |


| Item                | EIA Ref. | EM&A Ref. | Environmental Aspect                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Corresponding Mitigation Measures                                                                                                                                                              | EM&A Manual Recommended Mitigation/ Actions                                                                                                     | Action By  | Measurement Procedures/Methods                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------|----------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Terrestrial Ecology | 6.12     | E1-E8     | <p>a) The proposed Project will cause minor habitat loss of shrubland, temporary habitat loss of woodland, developed area and rocky shore, and removal of one individual climber species of conservation importance that is common within the Study Area and Hong Kong. Indirect water quality impact may arise from surface runoff or accidental spillage of chemicals in construction Phase.</p> <p>b) Use of powered plant equipment may bring noise disturbance on wildlife</p> | <p>a) Conditions in the Environmental Permit and Discharge License should be followed.</p> <p>b) Provide sufficient mitigation measures as recommended in approved EIA Manual requirement.</p> | <p>a) Construction noise and water quality mitigation measures proposed in the previous sections will be applicable to terrestrial ecology.</p> | Contractor | <p>(a) Bright colour fencing shall be erected along the boundary of the undisturbed region of the shrubland and woodland, and around <i>Diospyros vaccinioides</i>, a plant species of conservation importance, near the work boundary to remind workers not to trespass or occupy the area, and to be careful during operation of equipment.</p> <p>(b) Inspect the condition of <i>Diospyros vaccinioides</i> as part of weekly site audit.</p> <p>(c) Reinstate the disturbed rocky shore with the rocks temporarily removed.</p> <p>(d) Carry out compensatory tree planting in accordance with DEVB TCW No. 7/2015 to reinstate the affected woodland.</p> |

|                                                                                   |                                                                                 |  |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|--|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> |  | Page | N-6           |
|                                                                                   |                                                                                 |  | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  |  | Rev. | 01            |
|                                                                                   |                                                                                 |  | Date | Nov 25        |


| Item           | EIA Ref. | EM&A Ref. | Environmental Aspect                                                                                                                                                                                                                                                                                                                                                                       | Corresponding Mitigation Measures                                                  | EM&A Manual Recommended Mitigation/ Actions                                                                                                                                  | Action By  | Measurement Procedures/Methods                                                                                                                                             |
|----------------|----------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Marine Ecology | 7        | 7         | <p>a) The proposed Project will cause minor habitat loss of muddy seabed.</p> <p>b) Indirect water quality impact may arise from installation and extraction of sheet pile of cofferdam in construction phase.</p> <p>c) Dredging and backfilling for installation of diffuser will be conducted inside fully enclosed cofferdam. No marine sediment loss to water column is expected.</p> | a) Conditions in the Environmental Permit and Discharge License should be followed | a) The variation in water quality at coral and amphioxus habitats during cofferdam installation and extraction works will be overseen by water quality monitoring mentioned. | Contractor | (a) No specific monitoring and audit programme is required. With proper implementation of water quality mitigation measures, residual impact is expected to be acceptable. |

|                                                                                   |                                                                                 |  |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|--|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> |  | Page | N-7           |
|                                                                                   |                                                                                 |  | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  |  | Rev. | 01            |
|                                                                                   |                                                                                 |  | Date | Nov 25        |


| Item      | EIA Ref. | EM&A Ref. | Environmental Aspect                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Corresponding Mitigation Measures                                                  | EM&A Manual Recommended Mitigation/ Actions                                                                                                         | Action By  | Measurement Procedures/Methods                                                                                                                                              |
|-----------|----------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Fisheries | 8        | 8         | <p>a) No direct encroachment on Fish Culture Zone and Artificial Reefs in the Study Area is expected.</p> <p>b) About 1,920 m2 of fishing ground and 500 m2 of benthic spawning ground will be affected. Except the 5 m2 benthic spawning ground will be lost permanently, other impacted area will only be affected in construction phase temporarily (reversible impact). Indirect impact on fisheries resources by the water quality deterioration will be insignificant with proper implementation of water quality mitigation measures.</p> | a) Conditions in the Environmental Permit and Discharge License should be followed | Water quality at FCZ will be monitored during cofferdam installation and extraction works and dredging works in the construction phase as proposed. | Contractor | (a) No specific monitoring and audit programme are required. With proper implementation of water quality mitigation measures, residual impact is expected to be acceptable. |

|                                                                                   |                                                                          |  |      |               |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|--|------|---------------|
|  | EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O |  | Page | N-8           |
|                                                                                   |                                                                          |  | Ref# | EMA2403/03/58 |
|                                                                                   | Monthly EM&A Report                                                      |  | Rev. | 01            |
|                                                                                   |                                                                          |  | Date | Nov 25        |


| Item             | EIA Ref. | EM&A Ref. | Environmental Aspect                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Corresponding Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | EM&A Manual Recommended Mitigation/ Actions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Action By  | Measurement Procedures/Methods                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------|----------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Waste Management | 9.8      | WM4-WM23  | <p>a) Construction of the sewage treatment plant, laying of gravity sewers and rising mains and submarine outfall are expected to generate mainly inert construction and demolition (C&amp;D) materials (or public fill) from excavation, and unused building materials. Other wastes include noninert C&amp;D materials (or C&amp;D waste), plant materials, scaffolding, formwork and packaging, chemical waste from plant maintenance, bentonite slurry from drilling works and general refuse from workers.</p> <p>b) Dredging at the proposed diffuser location will generate marine sediment.</p> | <p>a) All C&amp;D materials generated will be transported and stored at temporary storage area. Cover will be provided during transportation of dusty materials. Suitable materials will be sorted for reuse on-site. Only non-inert C&amp;D material will be disposed offsite to NENT Landfill.</p> <p>b) Conditions in the Environmental Permit and Discharge License should be followed</p> <p>c) Fueling of equipment will be conducted carefully onsite by mobile tanker to avoid storage of fuel and oil spillage.</p> <p>d) Provision of drip trays for equipment likely cause spillage of chemical / fuel and provide routine maintenance.</p> | <p>(a) Reuse C&amp;D materials onsite and dispose excess uncontaminated ones to public fill.</p> <p>(b) Provide sufficient waste collection points for general refuse and regularly maintained to avoid accumulation. Dispose the waste at waste transfer or disposal facilities.</p> <p>(c) Minimize wastage through careful planning and avoiding over purchase of construction materials.</p> <p>(d) Provide training to workers on site cleanliness, waste management (waste reduction, reuse and recycle) and chemical handling procedures.</p> <p>(e) Hire licensed waste disposal contractors for waste collection and removal. Dispose waste at licensed waste disposal facilities.</p> <p>(f) Recondition and reuse bentonite as far as practical.</p> <p>(g) Conduct marine sediment test and dump dredged marine sediment according to <i>ETWB TCW No. 34/2002 Management of Dredged/Excavated Sediment</i> and Dumping at Sea Ordinance.</p> <p>(h) Chemical waste shall be handled, stored and disposed properly, according to the relevant guidelines.</p> | Contractor | <p>The Contractor should apply for relevant licenses/permits for waste disposal under different regulations and ordinances as follows:</p> <p>(a) Chemical Waste Permits/licenses under the Waste Disposal Ordinance (Cap 354);</p> <p>(b) Public Dumping License under the Land Miscellaneous Provisions) Ordinance (Cap 28);</p> <p>(c) Marine Dumping Permit under Dumping at Sea Ordinance (Cap 466); and</p> <p>(d) Effluent Discharge License under the Water Pollution Control Ordinance (Cap 358).</p> <p>b) Reference should be made to EPD's booklets on licenses/permits. The Contractor shall also document recycling receipts/ disposal record to keep track of waste movement. The ET shall check with the Contractor that these licenses/permits have been obtained. He should also review the above documentations regularly to ensure compliance with legislations and specifications.</p> |

|                                                                                   |                                                                                 |  |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|--|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> |  | Page | N-9           |
|                                                                                   |                                                                                 |  | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  |  | Rev. | 01            |
|                                                                                   |                                                                                 |  | Date | Nov 25        |

| Item                        | EIA Ref.          | EM&A Ref.         | Environmental Aspect                                                                                                                                                                                                                         | Corresponding Mitigation Measures                                                                                                                           | EM&A Manual Recommended Mitigation/ Actions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Action By  | Measurement Procedures/Methods                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------|-------------------|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Landscape and Visual impact | Table 10-6 & 10-7 | CM1-CM8 & OM1-OM5 | a) Minor landscape and visual impact is expected due to dredging work in open sea, construction of the STP and pipelines on land and the loss of existing trees and vegetation at the sewage treatment plant site in the construction phase. | a) Conditions in the Environmental Permit and Discharge License should be followed.<br><br>b) Implement the recommended mitigation proposed in EM&A manual. | a) The contractor shall employ a professionally qualified Registered Landscape Architect (RLA) on the Environmental Team to supervise and monitor the implementation of construction phase landscape and visual mitigation measures. This is necessary to ensure that all the recommended landscape and visual mitigation measures under Chapter 10 of the EIA are effectively implemented including minimization of the works footprint, ensuring that those existing trees earmarked for retention on site or transplanting are protected and planting works are correctly implemented. | Contractor | a) Tree risk assessment shall be undertaken by the contractor during construction to all existing trees within the project site as per "Guidelines for Tree Risk Assessment and Management Arrangement".<br><br>b) Site inspections by appointed RLA shall be undertaken at monthly intervals to closely monitor all these aspects of work. Inspection findings shall be logged in a site monitoring report with any discrepancies or concerns regarding the implementation and effectiveness of mitigation measures highlighted. |

|                                                                                   |                                                                                 |  |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|--|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> |  | Page | N-10          |
|                                                                                   |                                                                                 |  | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  |  | Rev. | 01            |
|                                                                                   |                                                                                 |  | Date | Nov 25        |

| Item           | EIA Ref. | EM&A Ref. | Environmental Aspect                                                                                                                                                                                                                                      | Corresponding Mitigation Measures                                                                                                                           | EM&A Manual Recommended Mitigation/ Actions                                                                                                                                                                                                                                                                                                                                                                                                                               | Action By  | Measurement Procedures/Methods                                                                                                                                                                  |
|----------------|----------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Build Heritage | 11.6     | BH1 - BH5 | a) As the proposed work is close to some of the identified built heritage resources, condition survey, vibration and settlement monitoring is recommended to identified built heritage to prevent indirect damage by mechanical vibration and settlement. | a) Conditions in the Environmental Permit and Discharge License should be followed.<br><br>b) Implement the recommended mitigation proposed in EM&A manual. | a) Provision of protective covering or protective screen is recommended to identified built heritage to prevent damages by construction tools or waste.<br><br>b) Maintenance of public access is suggested for identified built heritage. Besides, buffer zone of at least 1m from the works boundary should be provided for identified built heritage as far as possible.<br><br>c) Condition survey, vibration and settlement monitoring to identified built heritage. | Contractor | a) A maximum vibration level of 7.5mm/s shall be adopted for the Grade 3 Hung Shing Temple and settlement check points in the Alert/Alarm/Action limit levels at 6mm/8mm/10mm shall be adopted. |

|                                                                                   |                                                                                 |      |               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|  | <b>EP-516/2016 - Port Shelter Sewerage, Stage3 - Sewerage Works at Po Toi O</b> | Page | O-1           |
|                                                                                   |                                                                                 | Ref# | EMA2403/03/58 |
|                                                                                   | <b>Monthly EM&amp;A Report</b>                                                  | Rev. | 01            |
|                                                                                   |                                                                                 | Date | Nov 25        |

## APPENDIX O - CUMULATIVE STATISTICS ON COMPLAINTS, NOTIFICATIONS OF SUMMONS

---

## Environmental Complaints Logss

| Complaint Log No. | Date of Complaint | Received From | Received By | Nature of Environmental Complaint   | Relevant to the Construction Work of Project Site? (Y/N) | Investigation/ Mitigation Action                             | Status |
|-------------------|-------------------|---------------|-------------|-------------------------------------|----------------------------------------------------------|--------------------------------------------------------------|--------|
| 001               | 28 December 2021  | EPD           | ET          | Waste Management                    | N                                                        | The investigation reports was submitted on 7 January 2022    | Closed |
| 002               | 23 September 2024 | EPD           | ET          | Waste Management                    | N                                                        | The investigation reports was submitted on 27 September 2024 | Closed |
| 003               | 26 February 2025  | EPD           | ET          | Wastewater Management / Air & Noise | N                                                        | The investigation reports was submitted on 5 March 2025      | Closed |

Remark:

*\* No complaints, Notifications of Summons, or Successful Prosecutions were received in the reporting period.*



**Cumulative Statistics on Complaints, Notifications of Summons and Successful Prosecutions and Public Engagement Activities**

| <b>Reporting Period</b>           | <b>Complaints</b> | <b>Notifications of Summons and<br/>Prosecutions</b> | <b>Public Engagement Activities</b> |
|-----------------------------------|-------------------|------------------------------------------------------|-------------------------------------|
| <b>This Month</b>                 | 0                 | 0                                                    | 0                                   |
| <b>Cumulative Project-to-Date</b> | 3                 | 0                                                    | 0                                   |